



# mediclinics

## catalogue 26<sup>th</sup> edition

your guide to washroom equipment



*“Our aim is to offer comprehensive solutions for your needs in bathroom appliances, with innovatively designed and high-performance products.”*




# Over 40 years providing solutions



Starts the Commercial activity

1974



The Export activity starts

1988



Saniflow E-85 Production begins

1985



New logistics and assembly plant in Barcelona

First steps of Saniflow Corp (USA)

2003



2006



# ons for washroom equipment



Welcome to  
Mediclinics  
Italy

20  
09



Sales in over  
100 countries

20  
11



Launching of  
the Dualflow  
plus "hands-in"  
hand dryer

20  
12



Mediclinics  
Baby Changing  
Stations are  
marketed

20  
16



New  
Speedflow Plus

20  
17



# Strengths



## Innovation

Our own R&D&i department, which is made up of highly qualified engineers and includes a test laboratory for our products. These resources enable Mediclinics to design and develop new products and industrialise the manufacturing processes for these products.



## Production

Our own flexible, modern and efficient production lines, where qualified and trained personnel are responsible for manufacturing our products with excellent quality.



## Quality

The Mediclinics Quality department, made up of highly experienced and knowledgeable professionals, is responsible for ensuring the quality of the product. Moreover, all the company's processes are certified in accordance with the EN ISO9001 international quality standard



## Certifications

Our products meet the market's most demanding safety and quality standards. Mediclinics, through external laboratories, such as VDE (Verband der Elektrotechnik und Elektronik), TÜV Rheinland and UL (Underwriters Laboratories), guarantees the quality and safety of its products.



## Logistics

Central warehouse of more than 6000 m2, equipped with the most modern storage systems and handling equipment that ensures rapid and efficient preparation, packaging and shipping of orders.



## Customer care

Professional, responsive and highly qualified sales and customer care team who guarantee a unique service to all our customers, and provide a solution to all your needs and problems.

# International References

## USA & CANADA

- Wal-Mart Stores & Superstores Nationwide, USA
- White House Visitors Center, Washington, USA
- Dodger's Stadium, Los Angeles, California, USA
- YMCA Of New York City, New York, USA
- Texas Department of Transportation, Texas, USA
- Delaware State Fairgrounds, Delaware, USA
- Penn State University, Pennsylvania, USA
- University of California - Berkeley, Vance Brown Bldf, California, USA
- United Airlines VIP red Carpet Clubs, nationwide, USA
- Polo Park shopping Center, Winnipeg, Manitoba, Canada

- La Casona Theatre, Buenos Aires, Argentina
- Executive's Tower of the President's Offices, Montevideo, Uruguay
- City Courts of Justice Complex, Santiago de Chile, Chile
- Universidad Autónoma Metropolitana, Mexico City, Mexico
- Shopping Center Miraflores, Guatemala city, Guatemala
- Cines Cineplex, Perú
- Ferryboat Central Station "Buque-Bus", Buenos Aires, Argentina
- Monterrey International Airport, Mexico
- Franquicias Kokoriko, Colombia
- Mental Hospital Alemán, Concepción, Chile

## LATIN AMERICA

- F1 Racetracks of Abu Dhabi & Bahrain
- Alexander Museum, Tel Aviv, Israel
- Royal Opera House, Muscat, Oman
- Victoria & Alfred Waterfront, Capetown, South Africa
- Istanbul Airport, Turkey
- Lebanon University Campus, Beirut, Lebanon
- Meydan Racecourse, Dubai, UAE
- Kenya Commercial Bank Headquarters, Nairobi, Kenya
- Ibn Battouta Olympic Stadium, Tanger, Morocco
- Canadian High Commission, Nairobi, Kenya

## AFRICA & MIDDLE EAST

## EUROPE

- Football stadium Camp Nou, Barcelona, Spain
- Football stadium Santiago Bernabeu, Madrid, Spain
- Ikea stores across Europe
- Queen Mary, University of London, UK
- European Parliament, Brussels, Belgium
- United Nations Headquarters, Frankfurt, Germany
- Charles de Gaulle International Airport, Paris, France
- National Museum, Warsaw, Poland
- Pirelli headquarters building, Torino, Italy
- Hotel Epic Sana, Lisboa, Portugal

## ASIA

- National University of Singapore, Singapore
- Crown Regency Hotel, Manila, The Philippines
- Bitexco Financial Tower, Ho Chi Minh City, Vietnam
- Hong Kong MTR Stations, Hong Kong
- Bandaranaike International Airport, Colombo, Sri Lanka
- Chennai International Airport, India
- Bangsar Shopping Vailage, Kuala Lumpur, Malaysia
- Sentosa Island Theme Park, Singapore
- Hong Kong University, Centennial Campus, Hong Kong
- Lam Tin North Municipal Services Building, Hong Kong

## OCEANIA

- Sydney Opera House and Casino, Australia
- Auckland Super City Council, New Zealand
- Sidney International Airport, Australia
- The National Maritime Museum, Sydney, Australia
- Museum of New Zealand Te Papa Tongarewa, Wellington, New Zealand
- State Transit Authority of NSW's Head Office, Mona Vale, Australia
- Top Ride city shopping mall at Central North, Ryde, Australia
- Sydney Olympics Venues, Australia
- Manly Wharf, Sidney, Australia
- The Crown Casino, Melbourne, Australia













Departures

Time	Flight	Destination	Gate
12:00	00 1951	NEW YORK	06
12:15	PN 0034	CHICAGO	18
12:20	T3 0529	LAS VEGAS	32
12:30	PN 2415	HONOLULU	14
12:50	G1 1822	SAN FRANCISCO	09
12:55	T3 0944	WASHINGTON	27
13:20	SF 2728	HOUSTON	20
13:45	00 0061	MIAMI	31
13:50	BK 1532	BOSTON	04
14:05	00 3487	NEW YORK	12
14:30	PN 0194	ATLANTA	03
14:35	SF 0028	CHICAGO	08

Handwashing station with two sinks, mirrors, and a soap dispenser.

Three urinals mounted on a wall, each with a vertical privacy panel.

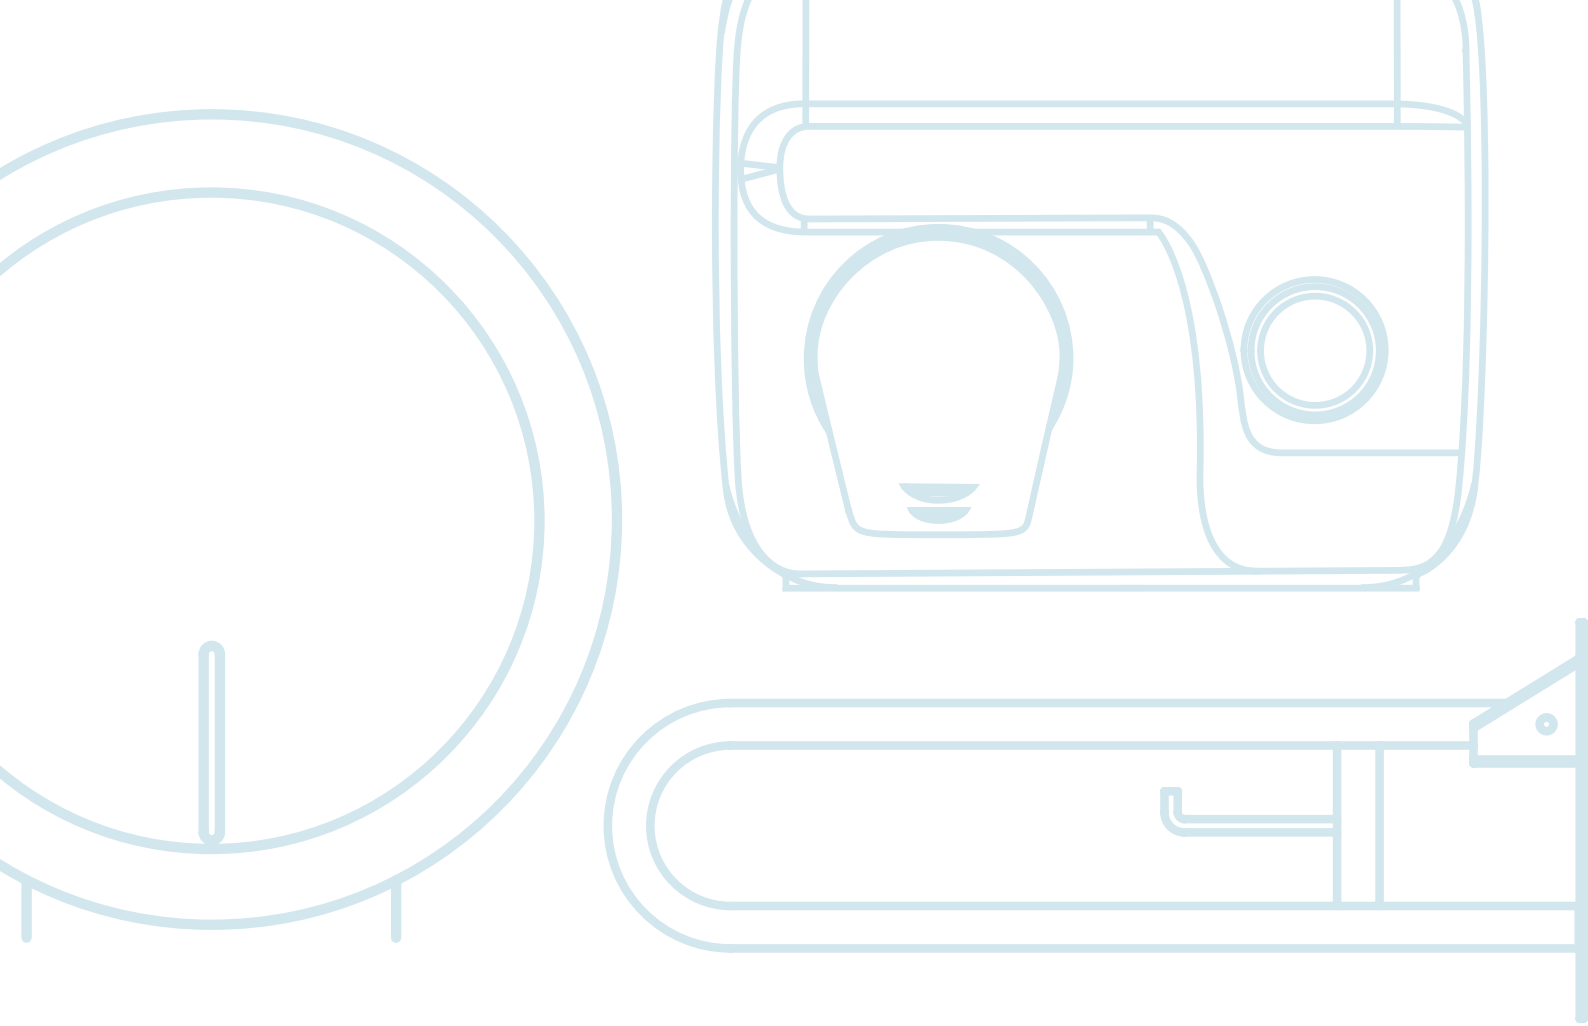












## **20-67**

HAND DRYERS

---

## **102-109**

PAPER TOWEL  
DISPENSER

---

## **148-163**

GRAB BARS AND OTHER  
ACCESSORIES

---

## **184-187**

SIGNAGE

---

## **68-77**

HAIR DRYERS

---

## **110-119**

WASTE RECEPTABLES  
AND BINS

---

## **164-167**

BABY CHANGING  
STATIONS

---

## **188-204**

ANNEXES

---

## **78-91**

SOAP DISPENSERS

---

## **120-127**

MULTI-PURPOSE  
CABINETS

---

## **168-179**

STAINLESS STEEL  
SANITARY PRODUCTS

---

## **205-208**

PRODUCT LIST

---

## **92-103**

TOILET PAPER  
DISPENSERS


## **128-147**

BATHROOM  
ACCESSORIES

## **180-183**

DRINKING WATER  
FOUNTAINS

<b>HAND DRYERS</b>	Dualflow® plus	26-29	Optima®	58-59
	Machflow®	30-35	Juniorplus®	60-61
	Speedflow® plus	36-41	Smartflow®	62-63
	Saniflow®	44-51	Mediclinics hand dryers comparative chart table	64-67
	Mediflow®	52-55		
<hr/>				
<b>HAIR DRYERS</b>	Public use			71-72
	Individual use			73-75
	Table			76-77
<hr/>				
<b>SOAP DISPENSERS</b>	Automatic			81-82
	Push-button			83-89
	Table			90-91
<hr/>				
<b>TOILET PAPER DISPENSERS</b>	Industrial			95-96
	Standard / Adjustable to industrial			97-99
	Other			100-101
	Table			102-103
<hr/>				
<b>PAPER TOWEL DISPENSERS</b>	C/Z folder paper towel			107
	Roll			108-109
	Table			110-111
<hr/>				
<b>WASTE RECEPTABLES AND BINS</b>	Bins			115-117
	Sanitary napkin containers			118
	Pedal bins			119
	Table			120-121
<hr/>				
<b>MULTI-PURPOSE CABINETS</b>	Paper towel dispensers + Saniflow + bin			125
	Paper towel dispensers + bin			126
	Table			127
<hr/>				
<b>BATHROOM ACCESSORIES</b>	Medinox series			131-135
	Medisteel series			136-141
	Medicrom series			142-147
<hr/>				
<b>GRAB BARS AND OTHER ACCESSORIES</b>	Medinox stainless steel			151-155
	Mediepoxy steel			156-158
	Table of grab bars			159
	Seats			160-161
	Mirrors			162-163
<hr/>				
<b>BABY CHANGING</b>	Baby changing stations			166-167
<hr/>				
<b>STAINLESS STEEL SANITARY WARE</b>	Wash basin			171
	Wall sinks			172-174
	Shower trays			175
	Urinals / toilet			176-178
	Table			179
<hr/>				
<b>DRINKING WATER FOUNTAINS</b>	Drinking water fountains			183
<hr/>				
<b>SIGNAGES</b>	Signages			187
<hr/>				
<b>ANNEXES</b>	Mediclinics BIM project	190-191	Point of sale advertising	199
	Summary of recessed range	192	Certifications	200-201
	Installation examples	193-197	World Wide Job References	202-203
	Advice on cleaning stainless steel	198	Logistics information	204
<hr/>				
<b>PRODUCT LIST</b>	Product list			206-207



## HAND DRYERS

*designed to care your hands*





📍 Liverpool Station, Liverpool, United Kingdom

NEW  
GENERATION  
HAND DRYERS

GREEN-SUSTAINABLE  
HIGH TRAFFIC  
HIGH SPEED  
ENERGY SAVINGS



10-15  
seconds

dualflow® plus  
machflow®  
speedflow® plus  
speedflow®

TRADITIONAL  
HAND DRYERS

HIGH TRAFFIC  
HIGH DURABILITY  
LOW NOISE



20-29  
seconds

saniflow®  
mediflow®

TRADITIONAL  
HAND DRYERS

MEDIUM / LOW TRAFFIC  
LOW NOISE  
MOST AFFORDABLE



30-40  
seconds

optima  
juniorplus  
smartflow®

## OUR HAND DRYER RANGE

### *Simply functional*

About 50 years ago, the first revolution in public toilet facilities took place throughout the world, with the appearance of the first hot air hand dryers. A new system for hand drying appeared and, thanks to its many advantages compared with other hand drying methods at that time, it slowly became more popular and familiar. Nowadays, you rarely see a public toilet without a hand dryer.

Now we can talk about a second wave of hand dryer innovation. The hot air hand dryer concept evolved and a new concept was born: the high speed, energy efficient, hand dryer.

Thus, the traditional hot air hand dryers were complemented by a new line of hand dryers that achieved drastically reduced drying times, operational costs and CO<sub>2</sub> emissions to the atmosphere. For this reason, we also call them eco-fast hand dryers.

### THE ADVANTAGE OF HIGH SPEED

High speed dryers have become the market benchmark for hand drying solutions. With faster drying than traditional models, these machines achieve a high level of user satisfaction. They are extremely efficient as regards energy consumption, achieve a

significant reduction in operational costs, improve the sustainability performance of the building and reduce CO<sub>2</sub> emission levels to the atmosphere.

### THE ADVANTAGES OF TRADITIONAL MACHINES

Traditional hand dryers (hot air hand dryers) are the perfect option for locations where a low noise level is required, such as libraries, theatres, cinemas, etc. and also in places where there may be vandalism. In the last case, the robustness and durability of these dryers is ideal.

These hand dryers continue to be, therefore, a good solution in many cases, so Mediclinics also offers one of the best ranges of this type of hand dryer on the market.

### OUR RANGE

Currently, Mediclinics, as a result of its continuous innovation, has 3 hand dryer ranges divided into 8 families. These are available in different finishes and performance levels, which means we offer a wide range of solutions for hand drying, whether from a more traditional perspective or through an eco-fast perspective.





## ECO-FAST RANGE

Faster, safer, cleaner and more environmentally friendly HAND DRYERS.

The hand dryers from the Mediclinics eco-fast range are very energy efficient, as their electrical power consumption is very low. They are also very environmentally friendly, as their CO<sub>2</sub> emission levels to the atmosphere are very low and they are manufactured from 100% recyclable materials.

The cutting-edge technology applied to this line of eco-fast hand dryers makes them unique in the market. The main advantages of these hand dryers are:

- Reduction in drying time (between 8 and 15 seconds).
- Drying 3 times faster than traditional models, thus reducing waiting times and increasing traffic flow.
- Low energy consumption.
- CO<sub>2</sub> emission levels to the atmosphere among the lowest on the market.

- Reduced noise pollution levels compared to competitors' models.
- Reduction in energy consumption varies between 80 and 90%, compared to other traditional dryers.

### "BLUE ANGEL": THE GREEN SOLUTION

"Blue Angel" certification is an environmental label awarded by the German Federal Government for the protection of people and the environment.

The main aims of this eco-label are: climate protection, the reduction of energy consumption and to prevent the emission of polluting agents and waste.

The Blue Angel eco-label for our hand dryers certifies that:

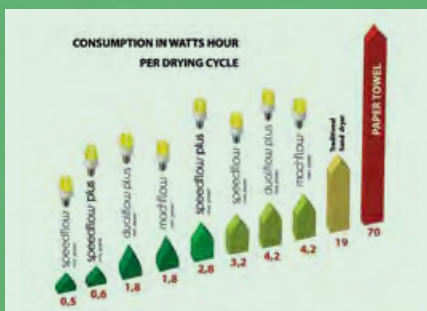
- Consume little energy
- Obtain high drying indices in a short time
- Are robust, safe and are designed with recyclable materials
- Do not contain materials that could damage the environment or people





### ENERGY SAVINGS

The new technologies applied to these hand dryers mean that they consume much less.



### ULTRA-FAST DRYING TIME

The usual drying time of conventional machines is over 30 seconds, so the DUALFLOW PLUS, MACHFLOW and SPEEDFLOW families are four times faster (8-15 seconds). They are unquestionably some of the fastest hand dryers on the market.

### CARING FOR THE ENVIRONMENT

The CO<sub>2</sub> emission level of a traditional hand dryer is approximately 4.5 g CO<sub>2</sub>/drying cycle (\*). The CO<sub>2</sub> emission levels of a Dualflow Plus, Machflow or a Speedflow is approximately 0.8 g CO<sub>2</sub>/drying cycle (\*). They are surely the lowest CO<sub>2</sub> emission levels on the market.

### MINIMUM NOISE POLLUTION

It is estimated that the noise from a conventional hand dryer is approximately 90 dBA, so the **DUALFLOW PLUS**, **MACHFLOW** and **SPEEDFLOW** families would be between 15% and 30% below this level. They are undoubtedly the lowest noise levels on the market.



(\* Data calculated considering average emissions (g CO<sub>2</sub>/kWh) of each one of the electricity production technologies in Spain during 2015 and also the specific weight in % of each one on the total generation of electrical power.



## DUALFLOW PLUS

*A new generation hand dryer, fast, powerful, efficient and with an elegant design*

- Ultra-fast drying speed (8-15 seconds)
- Low energy consumption (1.8 - 4.2 W/h per drying cycle)
- Very low CO<sub>2</sub> emissions level
- Very low noise level in its category (62-72 dBA)
- Adjustable motor speed with a potentiometer (19,000-30,000 rpm)
- Air filtration with a HEPA filter (filters 99.95% of 0.3 micron particles)
- Removable water tank for cleaning and disinfection
- Optionally it can be connected directly to the waste pipe
- BioCote, inhibits the growth of bacteria that cause bad smells and stains
- Switch for turning the heating element on and off easily
- Easy maintenance and ADA compliant



# DUALFLOW PLUS

*a handdryer for a new generation*

Dualflow Plus M14 is probably the most eco friendly "hands-in" type of dryer on the market. Stylish designed for safe, fast and economical use in all washrooms with high or low traffic volume. Dualflow plus offers great features at a competitive price.

*dries hands  
in 10-15  
seconds*



**BIOCOTE**  
Antimicrobial technology is embedded to protect surfaces on the dryer in contact with the water



**4 Air nozzles**  
For fastest hand drying



**Luminous frontal leds**  
For a quick diagnosis of the hand dryer status



**3 most popular finishes**  
In white (M14A), satin (M14ACS) or black (M14AB)



**Water from hands is collected**  
No hazardous water waste on the floor



**Heating element**  
For maximum comfort



**Variable speed**  
Energy consumption, noise level and drying time are adjustable



**Drainpipe connection**  
First hand dryer directly connected to the drainpipe (Optional)



**On/Off switch for heating element**  
Option to turn on/off the heating element



**Air-freshener tablet**  
For a clean and fresh washroom (Optional)



**HEPA filter medium**  
Cleans the air stopping the particles of dirt, dust, bacteria, pollen, etc.  
Clean and fresh air.



**Removable water tank**  
With external valve for easy emptying



Over **73%** saving in energy consumption compared to equivalent dryers

COMPARATIVE CONSUMPTION - SAVING  
Dualflow plus vs similar "Hands-in" hand dryers from other brands

	Wattage	Consumption €/Minute*	Consumption €/Hour*	Economical saving Dualflow® Plus vs competitors %
Other U-shape dryer	1600	0.004	0.251	73.71 %
Asian "hands-in"	1750	0.005	0.274	75.71 %
Dualflow® plus dryer	420	0.001	0.066	

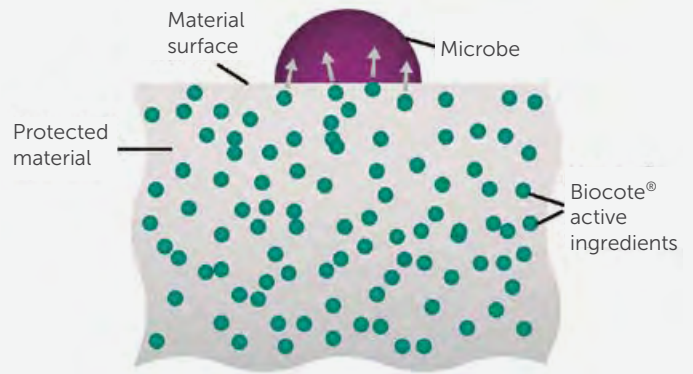
\*Calculation basis 0.156674 eur/Kwh (VAT and taxes not included)

# HYGIENE

## Biocote® Antimicrobial Technology


The Dualflow Plus incorporates BioCote® technology in additive form. This additive is incorporated at the time of manufacture of the machine's components that are in direct contact with the water and provides continuous antimicrobial protection.

The active ingredient on the surface of a material treated with a BioCote® additive attaches to the microbes that come into direct contact with the machine's surface, it then attacks and inhibits their reproductive function. On not being able to reproduce, the microbes gradually die off and disappear from the surface of the hand dryer.



Biocote® Antimicrobial Protection:

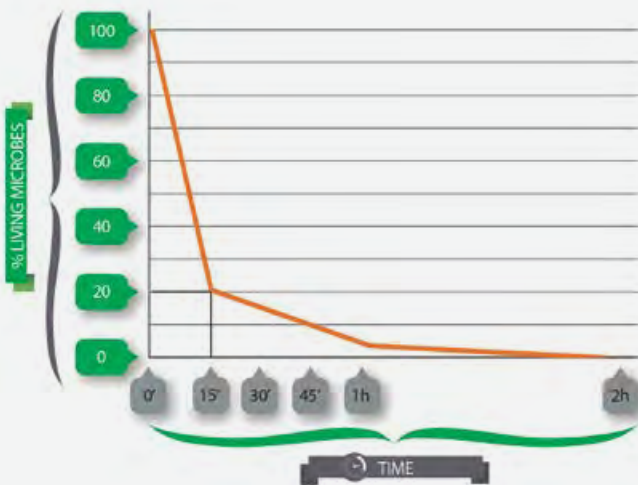- Removes 80% of microbes in 15 minutes
- Removes 99.9% of microbes in 2 hours
- Remains active until the end of the useful life of the product
- It is effective against bacteria, fungi and some viruses
- It acts continuously and relentlessly.



The level of microbes on a Biocote® protected surface is reduced up to 99.5% in two hours, compared to an untreated one. BioCote® technology starts to have an effect after just 15 minutes.



**NOTE:** BioCote® technology does not protect users or others against disease causing bacteria, germs, viruses or other harmful organisms. This technology is not a substitute for good hygiene and/or cleaning practises.

## HEPA Filter Medium

The Dualflow® Plus is fitted as standard with a cartridge containing a HEPA filter media, that filters out solid particles in suspension and notably improves the air quality.

The filter traps most of the micro-particles in the air, such as: pollen, dust mites, mold, tobacco smoke and even virus and bacteria.

Thanks to its high filtering efficiency, the presence of allergens and particles in the bathroom air is notably reduced, improving the air purity.

Besides, the HEPA filter media includes an activated carbon filter to capture unpleasant odours.



# HAND DRYERS dualflow<sup>®</sup> plus

sensor operated



**M14A**

material: **ABS**  
finish: **white**

410 km/h

NEW FEATURES

ALSO AVAILABLE IN BLUE ANGEL VERSION




**M14AB**

material: **ABS**  
finish: **black**

410 km/h

NEW FEATURES

ALSO AVAILABLE IN BLUE ANGEL VERSION




**M14ACS**

material: **ABS**  
finish: **satın**

410 km/h

NEW FEATURES


ALSO AVAILABLE IN BLUE ANGEL VERSION




## M14A · M14AB · M14ACS COMPONENTS AND MATERIALS

- High speed Class F universal brush motor.
- ABS cover
- Motor power adjustable, allowing electricity consumption to be regulated
- Minimum Heating element (only 400W) with switch "on/off" option
- IR sensors in both sides for automatic hands detection
- H13 HEPA filter, efficient to MPPS\* > 99,95%, penetration at the MPPS\* of 0,05%. Humidity resistance 100%
- Inner tank to collect the water. Removable water tank, with external valve for easy emptying
- Acoustic and optical warning of full water tank
- Frontal leds showing the status of the hand dryer
- Proven antimicrobial and antibacterial protection using silver ion technology from Biocote<sup>®</sup>, resisting the growth of microbes e.g. bacteria and moulds, complementing the cleaning routines
- An optional odor neutralizer for a cleaner and more pleasant atmosphere in the bathroom is available (Ref. RC POM 14)

\*MPPS: Most penetrating particle size



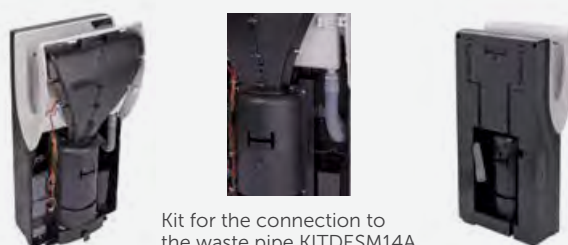
Optionally, and by means of a kit for the connection to the waste pipe, code KITDESM14A, the dualflow<sup>®</sup> plus can be connected directly to the waste pipe. Thus the emptying of the water tank is eliminated because the water always goes directly to the waste pipe



## M14A · M14AB · M14ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240V
Frequency	50/60Hz
Electrical Isolation	Class I
Total power	420 - 1,500W
Consumption	3.2 - 6.4A
Motor power	420 - 1,100W
Rpm	19,000 - 30,000
Heating element power	0W or 400W (on/off switch)

Weight	8.3Kg
Cover thickness	3mm
Drying time	8-15sec
Air velocity	234 - 410Km/h
Air temperature (10 cm distance/21°C)	40°C
Sound pressure (at 2m)	62 - 72dBA
Protection rating	IPX4








## MACHFLOW

*Technology, robustness, compact design and quality at the service of hand drying*

- Ultra-fast drying speed (8-15 seconds)
- Low energy consumption (1.8-4.2 W/h per drying cycle)
- Very low CO<sub>2</sub> emissions level to the atmosphere
- Low noise pollution (67-74dBA)
- Adjustable high speed motor (19,000-30,000 rpm)
- Switch for turning the heating element on and off easily
- Easy maintenance
- Fast install/uninstall technology to the wall (optional).
- Solid and compact



# MACHFLOW

*pure strenght*

Fast, tough, smart and most energy efficient eco high-speed hand dryer fully adjustable to individual needs. Designer for saving money and time in hand drying.

*dries hands  
in 10-15  
seconds*



**Air-freshener tablet.**  
For a clean and fresh bathroom  
(Optional)



**Heating element**  
For a maximum comfort



**Silentblocks**  
In the base plate to cushion  
mechanical vibrations



**On/Off switch for the  
heating element**  
Option to turn on/off the  
heating element



**The machflow@ Plug-in  
technology** is an easy, practical,  
fast and secure system to install  
and uninstall the hand dryer  
(optional)



**Variable speed.**  
Energy consumption, noise  
level and drying time are  
adjustable



**Hands distance detection**  
Electronic infrared detection sensor  
adjustable by means of a  
potentiometer



**available  
in four  
finishes**



White



Black



Bright




Satin



# HAND DRYERS machflow®

sensor operated




**M09A**

material: **steel**  
finish: **white epoxy**

ALSO AVAILABLE IN BLUE ANGEL VERSION

325 km/h




**M09AB**

material: **steel**  
finish: **matte black epoxy**

ALSO AVAILABLE IN BLUE ANGEL VERSION

325 km/h

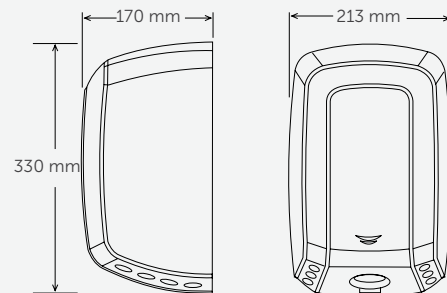


## M09A · M09AB COMPONENTS AND MATERIALS

- Maximum air velocity: 325 Km/h
- One-piece weld-free cover
- The base includes silent-blocks to cushion mechanical vibrations
- Class F high pressure universal brush motor
- Motor power is adjustable, allowing electricity consumption to be regulated
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use
- Minimum Heating element (only 400W) with switch "on/off" option
- Fast install/uninstall technology to the wall (optional). Plug-in system
- Electronic infrared detection sensor Detection distance adjustable by potentiometer (5 - 25 cm)
- An optional odor neutralizer for a cleaner and more pleasant atmosphere is available (Ref. RCPOM14)


## M09A · M09AB TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	420 - 1,500 W
Consumption	3.2 - 6.4 A
Motor power	420 - 1,100 W
r.p.m.	19,000 - 30,000
Heating element power	0 W or 400 W (on / off switch)
Weight	5.1 Kg
Cover thickness	1.5 mm
Drying time	8 - 15 sec
Air velocity	191 - 325 Km/h
Air temperature (10 cm distance / 21°C)	45°C
Sound pressure (at 2m)	67 - 74 dBA
Protection rating	IP23



# HAND DRYERS machflow®

sensor operated



**M09AC**

material: AISI 304 stainless steel  
finish: **bright**

ALSO AVAILABLE IN BLUE ANGEL VERSION

325 km/h



**M09ACS**

material: AISI 304 stainless steel  
finish: **satin**

ALSO AVAILABLE IN BLUE ANGEL VERSION

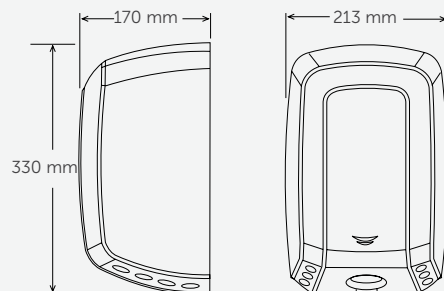
325 km/h

## M09AC · M09ACS COMPONENTS AND MATERIALS

- Maximum air velocity: 325 Km/h
- One-piece weld-free cover
- The base includes silent-blocks to cushion mechanical vibrations
- Class F high pressure universal brush motor
- Motor power is adjustable, allowing electricity consumption to be regulated
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use
- Minimum Heating element (only 400W) with switch "on/off" option
- Fast install/uninstall technology to the wall (optional). Plug-in system
- Electronic infrared detection sensor Detection distance adjustable by potentiometer (5 - 25 cm)
- An optional odor neutralizer for a cleaner and more pleasant atmosphere is available (Ref. RCPOM14)



## M09AC · M09ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	420 - 1,500 W
Consumption	3.2 - 6.4 A
Motor power	420 - 1,100 W
r.p.m.	19,000 - 30,000
Heating element power	0 W or 400 W (on / off switch)
Weight	5.1 Kg
Cover thickness	1.5 mm
Drying time	8 - 15 sec
Air velocity	191 - 325 Km/h
Air temperature (10 cm distance / 21°C)	45°C
Sound pressure (at 2m)	67 - 74 dBA
Protection rating	IP23




# HAND DRYERS machflow®
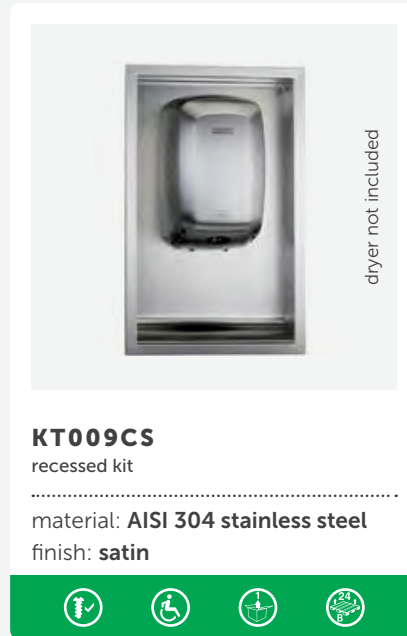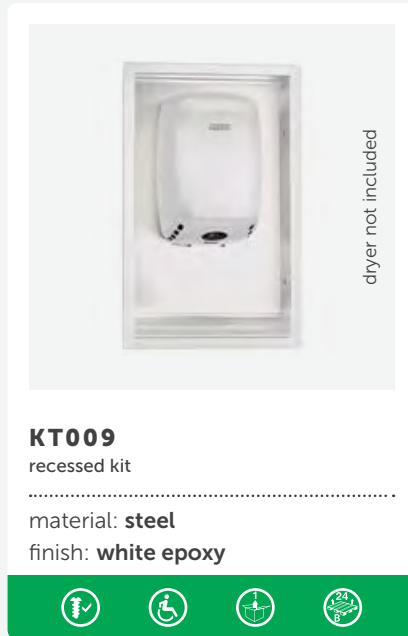
## recessed kit



### KT009 · KT009CS COMPONENTS AND MATERIALS

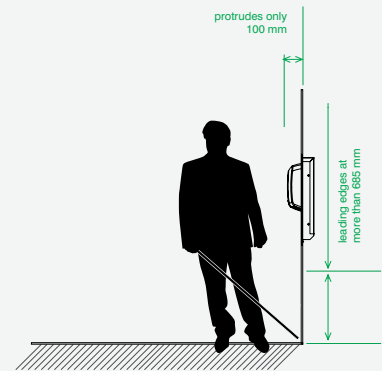- The American with Disabilities Act (ADA) defines the accessible requirements for the design of washroom spaces in the USA
- In chapter 3: "Protruding objects", point 307.2 "Protrusion limits" ADA says: objects above the finish floor or ground shall protrude 100 mm maximum horizontally into the circulation path.
- This kit has been designed for the Machflow to fully comply with these recommendations.




### KT009 · KT009CS TECHNICAL SPECIFICATIONS

Wall box is fabricated of two welded parts. The dryer mounting areas is fabricated of 1 mm 18-8 type AISI 304 stainless steel, it includes 4 M5 bolts welded on top of the base plate for fitting of the machflow® hand dryer. The frame is fabricated of 0,7 mm 18-8 type AISI 304 stainless steel with 4 screw holes of Ø6,5 mm for mounting on the wall.

Nuts and bolts for the fitting of the hand dryer to the kit included: 4 nuts DIN 934 M5, 4 washers DIN 9021 M5 and 4 rubber silent blocks 8 x 18 mm.


NOTE: the screws and wall plugs for the mounting of the cabinet to the wall are not included. The use of stainless steel screws is recommended.

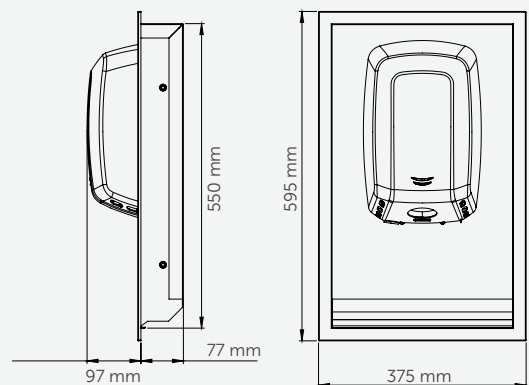Weight: 3 Kg (6,6 lbs) without machflow® hand dryer.



# HAND DRYERS machflow®

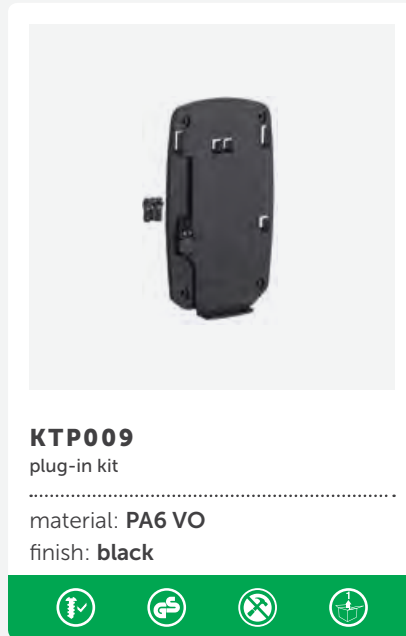plug-in kit



The machflow® Plug-in technology is an easy, practical, fast and secure system to install and uninstall a hand dryer, making maintenance much more efficient and reducing at the same time its costs.

With the machflow® Plug-in technology a hand dryer can be installed in only three main steps, it can be replaced in less than 10 seconds thanks to its SMED (Single-Minute Exchange of Die) system, its maintenance can be carried out better at the maintenance workshop and it is totally secure against electric shocks. All of these benefits allow you to reduce the maintenance costs.

## Benefits of the Plug-in system



- The machflow® Plug-in technology makes the hand dryer installation easier. With this technology it is only needed three main steps to carry it out, as follows:

**Step 1.**  
Wall  
base plate  
fixation



**Step 2.**  
Assembly  
of the  
safety  
socket



**Step 3.**  
Hand dryer  
installation  
to the wall



- Ready to work 24/7 with the machflow® Plug-in technology. The replacement of the hand dryer for maintenance purposes is straightforward (the hand dryer can be replaced in less than 10 seconds thanks to its SMED system) and it is not necessary to be carried out by a qualified technician (the plug and the socket used by the machflow® Plug-in technology are totally electrical isolated).
- Reduction of the maintenance costs thanks to: easy installation of the hand dryer, its quick replacement and the possibility to carry out maintenance operations at the maintenance workshop.
- Secure against electric shocks with the machflow® Plug-in technology. Electrical connections are much more secure with the machflow® Plug-in technology than the traditional electrical connection systems, because it avoids the risk of users accidentally touching energized conductors and thereby experiencing electric shock.



## SPEEDFLOW PLUS

*Versatile design, durable, modern and elegant design*

- Maximum air output speed of 400 Km/h
- Fast drying time (10-12 seconds)
- Very low energy consumption (0.6 - 2.8 W / h per drying cycle)
- High pressure motor with adjustable speed (23,000-32,000 rpm)
- Very silent operation (57 - 65 dBA)
- Automatic safety cut-out after 30 seconds of continuous use
- Heating element can be turned off by means of a micro-switch
- Universal voltage (100 - 240 V)
- Meets ADA regulations (protrudes only 100 mm from the wall)
- Vandal proof



# SPEEDFLOW PLUS

*high-speed elegance*

This especial stylish dryer is highly powerful despite of its unique flat design.

*dries hands  
in 10-12  
seconds*




**Global Universal voltage**  
Accepts 110-120/208/  
220-240 VAC input



**Silentblocks**  
In the base plate to cushion  
mechanical vibrations



**Heating element**  
For maximum comfort



**HEPA filter medium**  
Cleans the air stopping the  
particles of dirt, dust, bacteria,  
pollen, etc.  
Clean and fresh air.



**ON / OFF jumper for  
heating element**  
Option to turn on/off the  
heating element



**Ultraflat design**  
Protrudes only 10cm  
from the wall



**Hands distance detection**  
Electronic infrared detection  
sensor adjustable by means  
of a potentiometer



**Air freshener tablet**  
For a clean and fresh  
washroom (optional)



**Variable speed**  
Energy consumption, noise level and  
drying time are adjustable



**available  
in four  
finishes**



White



Black



Bright



Satin

# HAND DRYERS speedflow® plus

sensor operated



**M17A**

material: **steel**  
finish: **white epoxy**



**M17AB**

material: **steel**  
finish: **matte black epoxy**



**M17AC**

material: **AISI 304 stainless steel**  
finish: **bright**

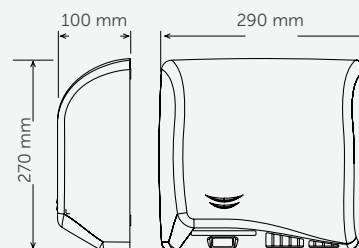


## M17A · M17AB · M17AC COMPONENTS AND MATERIALS

- High-pressure motor class F, with a safety self-resettable thermal cut-out and adjustable speed between 23,000 and 32,000 rpm. This regulation allows to adjust the electrical consumption. The motor has been set to have a soft start that lengthens its life span and dampens the noise when starting up.
- Electronic infrared detection sensor with adjustable detection range between 5 and 20 cm. It incorporates a safety system that detects any fixed target and stops the hand dryer automatically as a safety measure. Furthermore it also includes an automatic safety cut-out system that stops the unit after 30 seconds of continuous use.
- 500 W heating element with self-resettable thermal cut-out. It can be disconnected by means of a micro-switch "ON / OFF". In case of motor failure it is automatically disconnected on the spot.
- One-piece cover, 1.5 mm thick and ultra-flat (only 100 mm deep). It is fixed to the base plate by means of 2 safety, providing great robustness and avoiding unwanted accesses to its interior.
- Aluminum base that incorporates dampening elements in its back part and that, together with a studied internal design, make this hand dryer one of the quietest in its class.
- Plastic materials made with Polyamide 6 that incorporate a flame retardant additive. This additive increases the resistance to ignition of the plastic, and once ignited it reduces the propagation rate of the flame.
- The new SPEEDFLOW® Plus comes as standard with a cartridge that holds an HEPA filter medium that filters suspended solid particles (pollen, dust mites, cigarette smoke, etc.), notably improving the air quality. Furthermore, this cartridge also contains an activated carbon filtering medium that neutralizes odours and absorbs fumes and gases, helping avoid bad odours.
- Optionally it has an odor neutralizing tablet for a cleaner and more pleasant environment in the washroom.
- Universal voltage. It works indistinctly at electrical voltages of 100-120 V or 220-240 V, without the need to carry out any kind of set up.


## M17A · M17AB · M17AC TECHNICAL SPECIFICATIONS

Voltage	100-120 V, 208 V, 220-240 V	Heating element power	0 or 500W (ON/OFF switch)
Frequency	50 / 60 Hz	Weight	3.2 Kg
Electrical Isolation	Class I	Cover thickness	1.5 mm
Total power (heating el. ON)	675 W - 850 W	Drying time	10 - 12 sec
Total power (heating el. OFF)	180 - 360 W	Air velocity	290 - 400 Km/ h
Consumption	2.8-5 A	Air temp. (10 cm distance / 21°C)	42 °C
Motor power	180 - 360 W	Sound pressure (at 2 m)	57 - 65 dBA
r.p.m.	23,000 - 32,000	Protection rating	IP23




# HAND DRYERS speedflow® plus

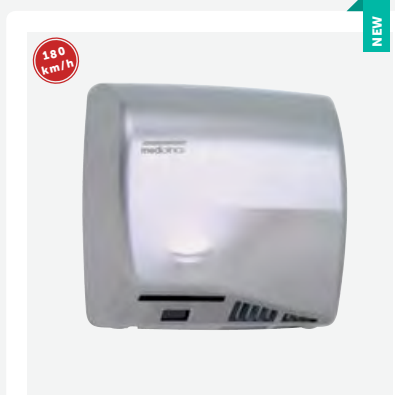sensor operated




## M17ACS

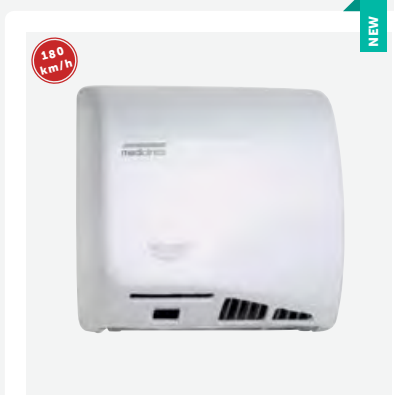material: **AISI 304 stainless steel**  
finish: **satin**



## M17AF

material: **AISI 304 stainless steel**  
finish: **satin**



- The American with Disabilities Act (ADA) defines the accessible requirements for the design of washroom spaces in the USA
- In chapter 3: "Protruding objects", point 307.2 "Protrusion limits" ADA says: objects above the finish floor or ground shall protrude 100 mm maximum horizontally into the circulation path.
- The Speedflow has been designed to fully comply with these recommendations.


## M17AS · M17AF COMPONENTS AND MATERIALS

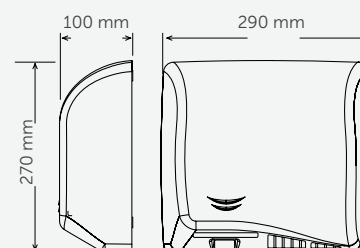- High-pressure motor class F, with a safety self-resettable thermal cut-out and adjustable speed between 23,000 and 32,000 rpm. This regulation allows to adjust the electrical consumption. The motor has been set to have a soft start that lengthens its life span and dampens the noise when starting up.
- Electronic infrared detection sensor with adjustable detection range between 5 and 20 cm. It incorporates a safety system that detects any fixed target and stops the hand dryer automatically as a safety measure. Furthermore it also includes an automatic safety cut-out system that stops the unit after 30 seconds of continuous use.
- 500 W heating element with self-resettable thermal cut-out. It can be disconnected by means of a micro-switch "ON / OFF". In case of motor failure it is automatically disconnected on the spot.
- One-piece cover, 1.5 mm thick and ultra-flat (only 100 mm deep). It is fixed to the base plate by means of 2 safety, providing great robustness and avoiding unwanted accesses to its interior.
- Aluminum base that incorporates dampening elements in its back part and that, together with a studied internal design, make this hand dryer one of the quietest in its class.
- Plastic materials made with Polyamide 6 that incorporate a flame retardant additive. This additive increases the resistance to ignition of the plastic, and once ignited it reduces the propagation rate of the flame.
- The new SPEEDFLOW® Plus comes as standard with a cartridge that holds an HEPA filter medium that filters suspended solid particles (pollen, dust mites, cigarette smoke, etc.), notably improving the air quality. Furthermore, this cartridge also contains an activated carbon filtering medium that neutralizes odours and absorbs fumes and gases, helping avoid bad odours.
- Optionally it has an odor neutralizing tablet for a cleaner and more pleasant environment in the washroom.
- Universal voltage. It works indistinctly at electrical voltages of 100-120 V or 220-240 V, without the need to carry out any kind of set up.

## M17ACS · M17AF TECHNICAL SPECIFICATIONS

Voltage	100-120 V, 208 V, 220-240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power (heating el. ON)	675 W - 850 W
Total power (heating el. OFF)	180 - 360 W
Consumption	2.8-5 A
Motor power	180 - 360 W
r.p.m.	23,000 - 32,000

Heating element power	0 or 500W (ON/OFF switch)
Weight	3.2 Kg (6.5 Kg M17AF)
Cover thickness	1.5 mm
Drying time	10 - 12 sec
Air velocity	290 - 400 Km/ h
Air temp. (10 cm distance / 21°C)	42 °C
Sound pressure (at 2 m)	57 - 65 dBA
Protection rating	IP23





# HAND DRYERS speedflow®

sensor operated



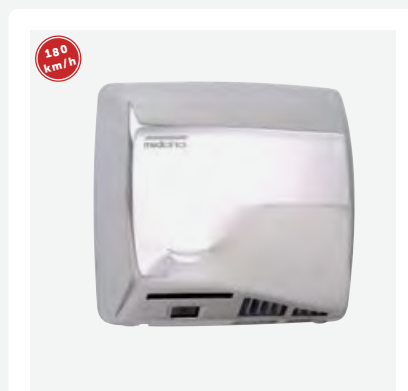
**M06A**

material: **steel**  
finish: **white epoxy**



**M06AB**

material: **steel**  
finish: **matte black epoxy**



**M06AC**

material: **AISI 304 stainless steel**  
finish: **bright**



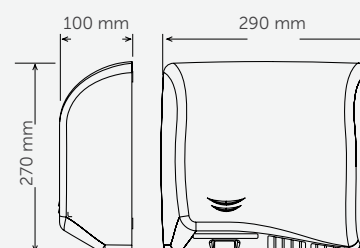
## M06A · M06AB · M06AC COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two safety screws and lock with special speedflow® key
- Aluminium base. Includes silent-blocks to damp mechanical vibrations
- Fire resistant plastic fan scroll
- High-speed motor with safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Speed motor adjustable by means of a potentiometer
- Disconnection of the heating element (H.E) by means of a jumper
- Disconnects automatically after 60 seconds of continuous use
- Electronic infrared detection sensor. Adjustable detection by potentiometer (5 - 25 cm)
- Ultra-flat: 10 cm deep (complies with ADA regulations)
- The electronic control unit detects whether the motor brushes have worn out, turning off the hand dryer as an additional safety measure
- Universal voltage

## M06A · M06AB · M06AC TECHNICAL SPECIFICATIONS

Voltage	100-120 V, 208 V, 220-240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power (heating el. ON)	1,010 W - 1,150 W
Total power (heating el. OFF)	110 - 250 W
Consumption	1.3-5 A (230 V)
Motor power	110 - 250 W
r.p.m.	8,500 - 11,200

Heating element power	0 or 900W (on/off jumper)
Weight	3.8 Kg
Cover thickness	1.5 mm
Drying time	10 - 12 sec
Air velocity	120 - 180 Km/ h
Air temp. (10 cm distance / 21°C)	42 °C
Sound pressure (at 2 m)	58 - 67 dBA
Protection rating	IP23



# HAND DRYERS speedflow®

sensor operated




**M06ACS**

material: **AISI 304 stainless steel**  
finish: **satin**



**M06AF**

material: **AISI 304 stainless steel**  
finish: **satin**



- The American with Disabilities Act (ADA) defines the accessible requirements for the design of washroom spaces in the USA
- In chapter 3: "Protruding objects", point 307.2 "Protrusion limits" ADA says: objects above the finish floor or ground shall protrude 100 mm maximum horizontally into the circulation path.
- The Speedflow has been designed to fully comply with these recommendations.


## M06ACS · M06AF COMPONENTS AND MATERIALS

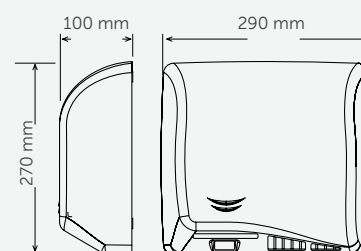- Weld-free cover fixed to the base with two safety screws and lock with special speedflow® key
- Aluminium base. Includes silent-blocks to damp mechanical vibrations
- Fire resistant plastic fan scroll
- High-speed motor with safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Speed motor adjustable by means of a potentiometer
- Disconnection of the heating element (H.E) by means of a jumper
- Disconnects automatically after 60 seconds of continuous use
- Electronic infrared detection sensor. Adjustable detection by potentiometer (5 - 25 cm)
- Ultra-flat: 10 cm deep (complies with ADA regulations)
- The electronic control unit detects whether the motor brushes have worn out, turning off the hand dryer as an additional safety measure
- Universal voltage

## M06ACS · M06AF TECHNICAL SPECIFICATIONS

Voltage	100-120 V, 208 V, 220-240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power (heating el. ON)	1,010 W - 1,150 W
Total power (heating el. OFF)	110 - 250 W
Consumption	1.3-5 A (230 V)
Motor power	110 - 250 W
r.p.m.	8,500 - 11,200

Heating element power	0 or 900W (on/off jumper)
Weight	3.8 Kg
Cover thickness	1.5 mm
Drying time	10 - 12 sec
Air velocity	120 - 180 Km/h
Air temp. (10 cm distance / 21°C)	42 °C
Sound pressure (at 2 m)	58 - 67 dBA
Protection rating	IP23



## HIGH TRAFFIC RANGE

*Reliable, durable, vandal proof, safe and quality HAND DRYERS*

Saniflow® and Mediflow® are the two hand dryer families from the Mediclinics high traffic range. They are characterised by an easy maintenance design, by their vandal proof features, by their robustness, but, above all, by their great reliability. These hand dryers were conceived to offer excellent performance over many years in very high traffic areas, such as airports, sports stadiums, shopping centres, sports centres, etc.

Due to their low noise level during operation, these hand dryers are also ideal for installation in places where quiet is important, such as museums, libraries, cinemas, theatres, etc.





The main advantages of these hand dryers are:

- High speed and long lasting motors that provide a stable and constant air flow that guarantees full drying of the hands in a few seconds.
- Adjustable detection distance, in all the automatic models of the range, in order to obtain the optimal hand detection distance depending on the available light.
- Built-in safety systems, such as thermal cut-off in the motors and in the heating elements, automatic cut-out system and vandal proof security screws that prevent accidents such as fire, electrocution, trapping, etc.
- Option to use a wall recess kit, with a frame manufactured in the same finish as the installed dryer, in order to comply with the ADA and UNE standards for the elimination of architectural barriers, which limit the horizontal projection of hand dryers to 100 mm, thus facilitating access for those with reduced mobility..

## SANIFLOW

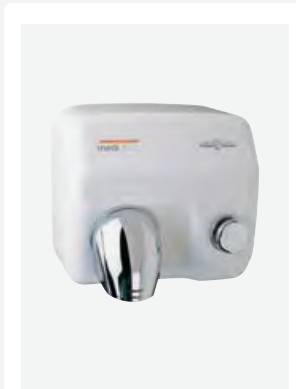
*A classic, robust and reliable design for the 21st century.*

- High speed and long lasting motors that provide a stable and constant air flow that guarantees full drying of the hands in a few seconds.
- Robust, reliable and high quality hand dryer
- One of the most powerful air flows on the market, within its class of machine
- The heating element and the motor have built-in safety thermal cut-off
- Chromed 360° rotating nozzle
- Manual or automatic operating options
- Vandal proof
- Easy cleaning and maintenance



# HAND DRYERS saniflow®

push-button



**E05**

material: **steel**  
finish: **white epoxy**



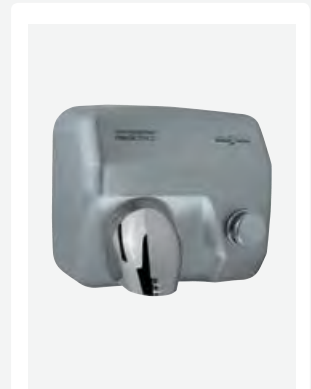
**E05B**

material: **steel**  
finish: **matte black epoxy**



**E05C**

material: **AISI 304 stainless steel**  
finish: **bright**



**E05CS**

material: **AISI 304 stainless steel**  
finish: **satin**

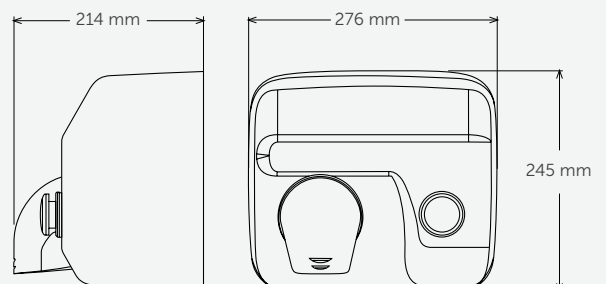


## E05 · E05B · E05C · E05CS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- 360° revolving nozzle in chrome-plated zamak
- Chrome-plated zamak button activates an electronic timer with a 35-second cycle
- Four silent-blocks to minimise vibrations and noise

## E05 · E05B · E05C · E05CS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	2,250 W
Consumption	10 A
Motor power	250 W
r.p.m.	5,500
Heating element power	2,000 W
Weight	4.65 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP23



# HAND DRYERS saniflow®

push-button / sensor operated



**E85**

material: **cast iron**  
finish: **white enamelled coating**



**E85A**

material: **cast iron**  
finish: **white enamelled coating**



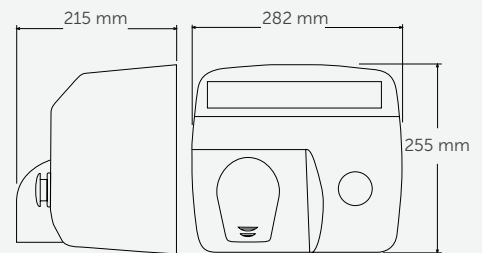
## E85 · E85A COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
  - 3 mm thick aluminium base
  - Fire resistant plastic fan scroll
  - Class F universal brush motor incorporating a safety thermal cut-off
  - Aluminium centrifugal double symmetrical inlet fan wheel
  - The heating element includes a safety thermal cut-off
  - Includes 4 silent-blocks to minimise vibrations and noise
  - 360° revolving nozzle in chrome-plated zamak
- E85**
- The chrome-plated zamak button activates an electro-mechanic timer with a 35-second cycle
- E85A**
- Electronic infrared detection sensor
  - Adjustable detection distance 15-25 cm


## E85 · E85A TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	2,250 W
Consumption	10 A
Motor power	250 W
r.p.m.	5,500
Heating element power	2,000 W
Weight	11.5 Kg
Cover thickness	6 mm
Drying time	29 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP23

**E85**



**E85A**

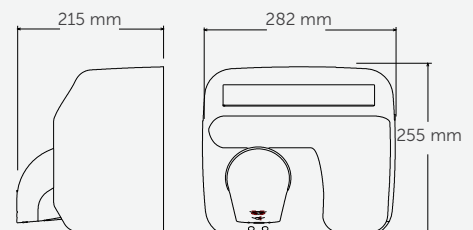

# HAND DRYERS saniflow®

push-button



**E88**

material: **steel**  
finish: **white enameled coating**



**E88C**

material: **steel**  
finish: **bright chrome**



**E88CS**

material: **steel**  
finish: **satin chrome**

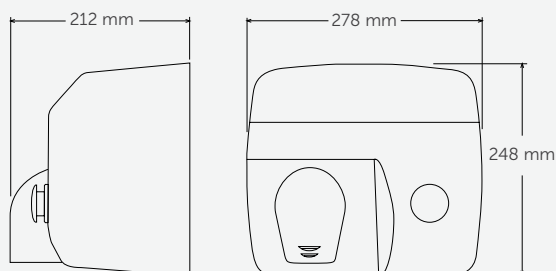


## E88 · E88C · E88CS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- Includes 4 silent-blocks to minimise vibrations and noise
- 360° revolving nozzle
- The button activates an electro-mechanic timer with a 35-second cycle

## E88 · E88C · E88CS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	2,250 W
Consumption	10 A
Motor power	250 W
r.p.m.	5,500
Heating element power	2,000 W
Weight	5.9 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP23





# HAND DRYERS saniflow®

push-button / sensor operated



**E880**

material: **steel**  
finish: **gold plated**



**E88AO**

material: **steel**  
finish: **gold plated**

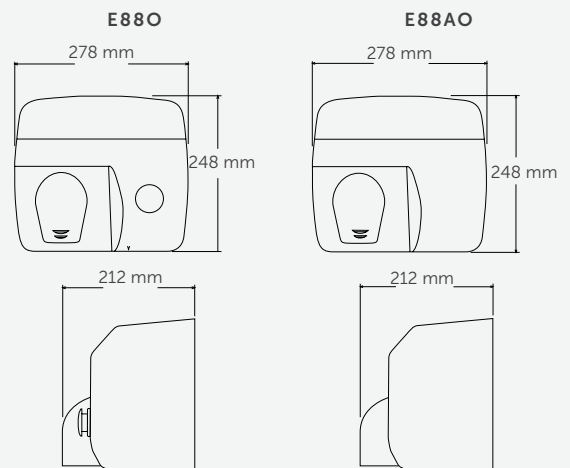


## E880 · E88AO COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
  - 3 mm thick aluminium base
  - Fire resistant plastic fan scroll
  - Class F universal brush motor incorporating a safety thermal cut-off
  - Aluminium centrifugal double symmetrical inlet fan wheel
  - The heating element includes a safety thermal cut-off
  - Includes 4 silent-block to minimise vibrations and noise
  - 360° revolving nozzle
- E880**
- The button activates an electro-mechanic timer with a 35-second cycle
- E88AO**
- Electronic infrared detection sensor
  - Adjustable detection distance 15-25 cm

## E880 · E88AO TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	2,250 W
Consumption	10 A
Motor power	250 W
r.p.m.	5,500
Heating element power	2,000 W
Weight	5.9 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP23



# HAND DRYERS saniflow®

sensor operated



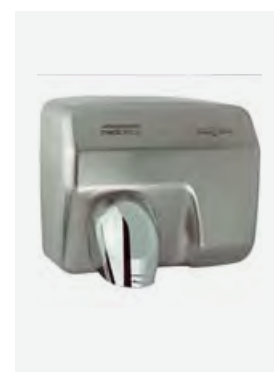
**E88A**

material: **steel**  
finish: **white enameled coating**



**E88AC**

material: **steel**  
finish: **bright chrome**



**E88ACS**

material: **steel**  
finish: **satin chrome**

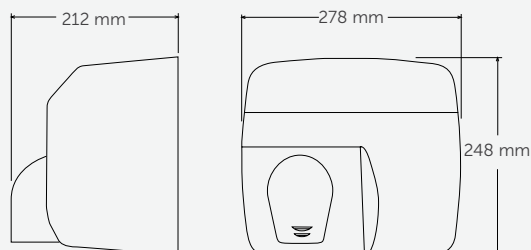


## E88A · E88AC · E88ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- 360° revolving nozzle in chrome-plated zamak
- Electronic infrared detection sensor
- Adjustable detection distance 15-25 cm
- Four silent-blocks to minimise vibrations and noise


## E88A · E88AC · E88ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	2,250 W
Consumption	10 A
Motor power	250 W
r.p.m.	5,500
Heating element power	2,000 W
Weight	5.9 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP23



# HAND DRYERS saniflow®

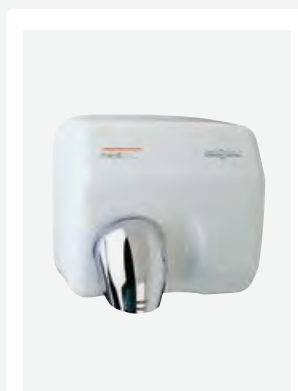sensor operated




**E05A**

ALSO AVAILABLE IN BLUE ANGEL VERSION



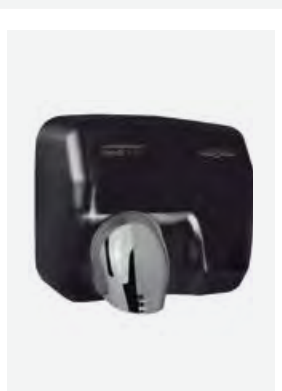material: **steel**  
finish: **white epoxy**




**E05AB**

ALSO AVAILABLE IN BLUE ANGEL VERSION



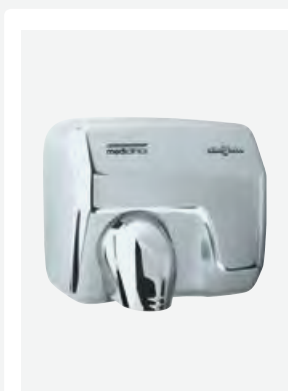material: **steel**  
finish: **matte black epoxy**




**E05AC**

ALSO AVAILABLE IN BLUE ANGEL VERSION



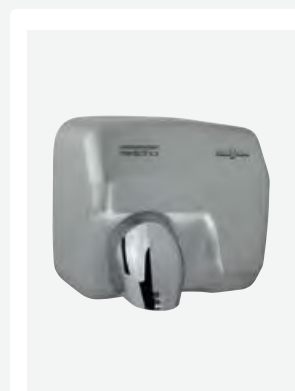material: **AISI 304 stainless steel**  
finish: **bright**



**E05ACS**

ALSO AVAILABLE IN BLUE ANGEL VERSION



material: **AISI 304 stainless steel**  
finish: **satin**

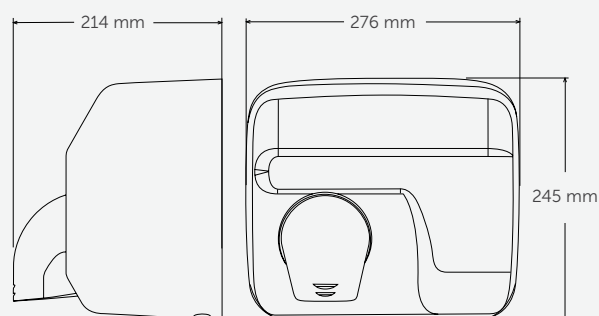


## E05A · E05AB · E05AC · E05ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- 360° revolving nozzle in chrome-plated zamak
- Electronic infrared detection sensor
- Adjustable detection distance 15-25 cm


## E05A · E05AB · E05AC · E05ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Total power	2,250 W
Consumption	10 A
Motor power	250 W
r.p.m.	5,500
Heating element power	2,000 W
Weight	4.65 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP23



# HAND DRYERS saniflow®

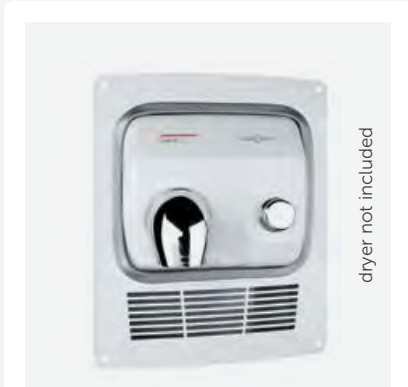recessed kit for push-button operated models



dryer not included

## KT0005

material: **steel**  
finish: **white epoxy**



dryer not included

## KT0005C

material: **AISI 304 stainless steel**  
finish: **bright**



dryer not included

## KT0005CS

material: **AISI 304 stainless steel**  
finish: **satın**



### KT0005 · KT0005C · KT0005CS COMPONENTS AND MATERIALS

- Electro-zincd iron cabinet for mounting the saniflow® dryer on the wall
- Grey rubber seal provides reinforced external protection that minimises vibrations and noise
- Nuts and bolts for assembling the dryer and fitting the frame to the wall are included

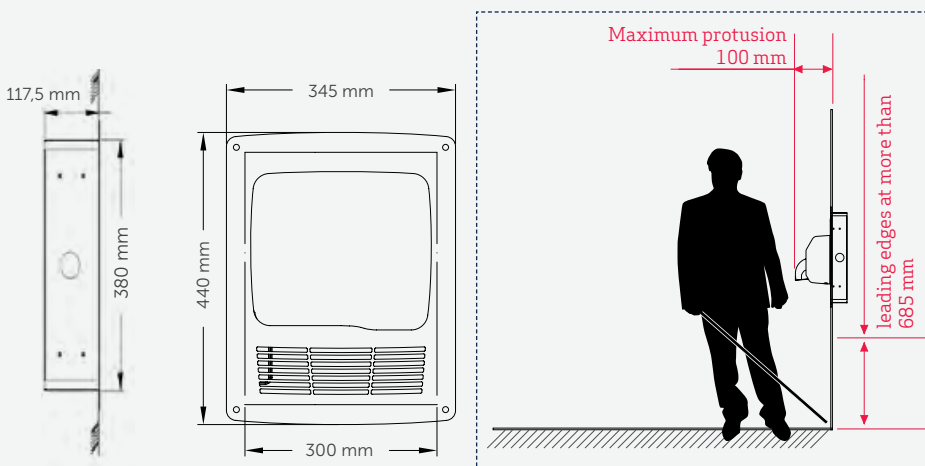
#### KT0005

- Steel frame

#### KT0005C · KT0005CS

- AISI 304 stainless steel frame

### KT0005 · KT0005C · KT0005CS TECHNICAL SPECIFICATIONS




The hand dryer and wall mountign kit protude 90 mm horizontally in compliance with the American ADA standards that restrict the horizontal projection of devices installed in public wahsrooms to 100 mm.



## MEDIFLOW

*Intelligent, quiet and modern*

- Powerful, robust and reliable hand dryer
- One of the quietest machines in its category (only 65 dBA)
- The heating element and the motor have built-in safety thermal cut-off
- "Logic Dry" intelligent system that adapts the outlet air flow temperature to the ambient temperature (M02 models)
- Automatic operation which prevents having to touch the machine
- Adjustable hand detection distance using a potentiometer
- Easy cleaning and maintenance



# HAND DRYERS mediflow® intelligent

sensor operated



**M02A**

material: **steel**  
finish: **white epoxy**



**M02AB**

material: **steel**  
finish: **matte black epoxy**



**M02AC**

material: **AISI 304 stainless steel**  
finish: **bright**



**M02ACS**

material: **AISI 304 stainless steel**  
finish: **satın**

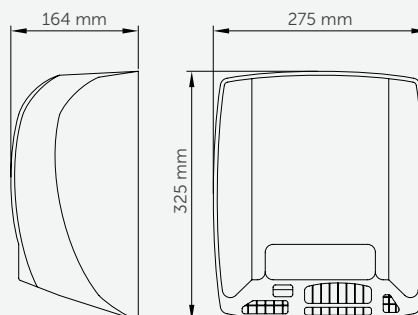


## M02A · M02AB · M02AC · M02ACS COMPONENTS AND MATERIALS

- The cover is fixed to the base with two screws
- Base and fan scroll fire resistant plastic. Includes silent-blocks to prevent mechanical vibrations
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Heating element incorporates a safety thermal cut-off
- Selective detection of fixed targets and system of automatic disconnection after 120 seconds of continuous use
- Electronic infrared detection sensor
- Adjustable detection distance by potentiometer 5 - 25 cm
- The technology **LogicDry** automatically regulates the temperature of the air output between four possible levels, depending on the room temperature, managing electricity consumption to offer significant energy savings

## M02A · M02AB · M02AC · M02ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class II
Total power	250 - 2,750 W
Consumption	1.2 - 12 A
Motor power	250 W
r.p.m.	4,500
Heating element power	0 - 2,500 W
Weight	4.25 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	95 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	65 dBA
Protection rating	IP23



# HAND DRYERS mediflow®

sensor operated



**M03A**

material: **steel**  
finish: **white epoxy**



**M03AB**

material: **steel**  
finish: **matte black epoxy**



**M03AC**

material: **AISI 304 stainless steel**  
finish: **bright**



**M03ACS**

material: **AISI 304 stainless steel**  
finish: **satin**

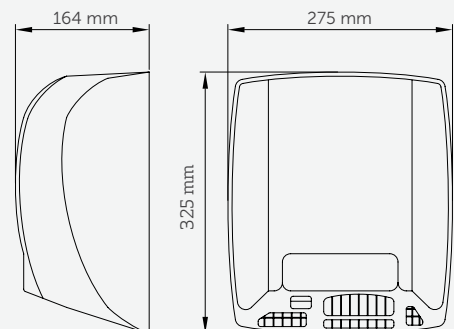


## M03A · M03AB · M03AC · M03ACS COMPONENTS AND MATERIALS

- The cover is fixed to the base with two screws
- Base and fan scroll in fire resistant plastic. Includes silent-blocks to cushion mechanical vibrations
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Heating element incorporating an safety thermal cut-off
- Electronic infrared detection sensor
- Adjustable detection distance by potentiometer 5 - 25 cm

## M03A · M03AB · M03AC · M03ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class II
Total power	2,750 W
Consumption	12 A
Motor power	250 W
r.p.m.	4,500
Heating element power	2,500 W
Weight	4.25 Kg
Cover thickness	1.5 mm
Drying time	29 sec
Air velocity	95 Km/h
Air temperature (10 cm distance / 21°C)	50°C
Sound pressure (at 2m)	65 dBA
Protection rating	IP23



# HAND DRYERS mediflow®

*recessed kit*



dryer not included

## KT0010

material: **steel**  
finish: **white epoxy**



dryer not included

## KT0010C

material: **AISI 304 stainless steel**  
finish: **bright**



dryer not included

## KT0010CS

material: **AISI 304 stainless steel**  
finish: **satin**



### KT0010 · KT0010C · KT0010CS COMPONENTS AND MATERIALS

- Cabinet in electro-zinc coated iron for installing the mediflow® hand dryer
- Grey rubber seal provides reinforced external protection, minimising vibrations and noise
- Nuts and bolts for mounting the dryer and its frame on the wall included

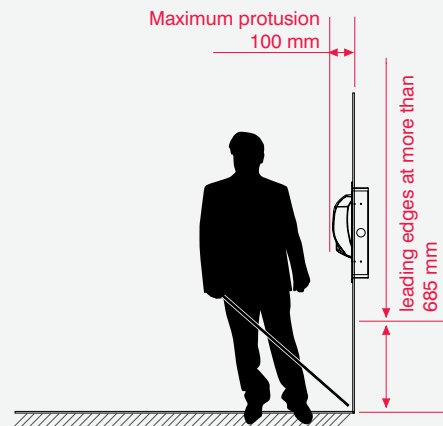
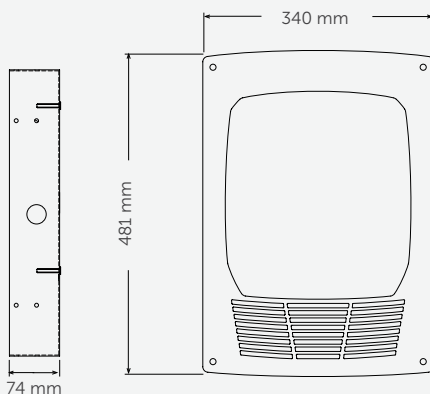
#### KT0010

- Steel frame

#### KT0010C · KT0010CS

- AISI 304 stainless steel frame

### KT0010 · KT0010C · KT0010CS TECHNICAL SPECIFICATIONS



The hand dryer and wall mountign kit protrude 90 mm horizontally in compliance with the American ADA standards that restrict the horizontal projection of devices installed in public wahsrooms to 100 mm.







## LOW / MEDIUM TRAFFIC RANGE

*HAND DRYERS with an elegant design and a great quality-price ratio.*

This range of hand dryers is made up of three families of machine: Optima®, JuniorPlus® and Smartflow®, ideal for locating in areas with low or medium traffic, for example, restaurants, bars, offices, etc.

Due to their low noise level during operation, these hand dryers are also ideal for installation in places where quiet is important, such as museums, libraries, cinemas, theatres, etc.

The main advantages of these hand dryers are:

- Very low noise level, making it the best option for toilet environments with low or medium traffic, where they are required to be as quiet as possible.
- Zero maintenance thanks to their brushless motors (Optima® and JuniorPlus®). Easy to clean.
- Adjustable detection distance, in all the automatic models of the range, in order to obtain the optimal hand detection distance depending on the available light.
- Built-in safety systems, such as thermal cut-off in the motors and in the heating elements and automatic cut-out system that prevent accidents such as fire, electrocution, trapping, etc.
- Quality, robustness and reliability thanks to the use of top quality components manufactured in accordance with the strictest quality standards.



## OPTIMA

*A modern design for a reliable, quiet hand dryer with excellent performance.*

- Zero maintenance thanks to its brushless motor. Easy to clean
- Hygienic thanks to its automatic operation that prevents having to touch the machine
- Adjustable hand detection distance
- One of the quietest machines in its category (only 57 dBA)
- The heating element and the motor have built-in safety thermal cut-off
- An ideal balance between performance and price



# HAND DRYERS *optima*

*sensor operated*



**M99A**

material: **steel**  
finish: **white epoxy**



**M99AC**

material: **AISI 304 stainless steel**  
finish: **bright**



**M99ACS**

material: **AISI 304 stainless steel**  
finish: **satin**

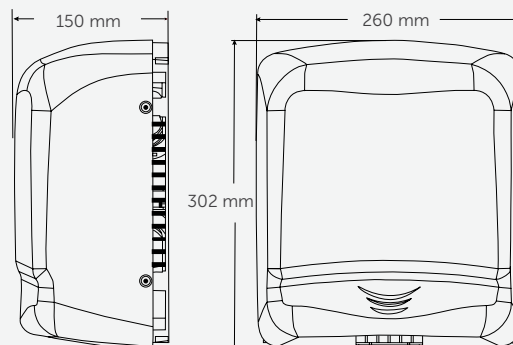


## M99A · M99AC · M99ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with 4 Allen bolts
- Base in ABS thermoplastic
- Thermoplastic fan wheel
- Class F induction motor incorporating a safety thermal cut-off
- PP UL 94-V0 centrifugal single inlet fan wheel
- Heating element incorporating a safety thermal cut-off
- Electronic infrared detection sensor
- Adjustable detection distance 5-25 cm
- Zamak air outlet grill

## M99A · M99AC · M99ACS TECHNICAL SPECIFICATIONS


Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class II
Total power	1,640 W
Consumption	7 A
Motor power	140 W
r.p.m.	2,800
Heating element power	1,500 W
Weight	4.45 Kg
Cover thickness	1.5 mm
Drying time	38 sec
Air velocity	50 Km/h
Air temperature (10 cm distance / 21°C)	57°C
Sound pressure (at 2m)	57 dBA
Protection rating	IP21



## JUNIORPLUS

*Hand dryer with the cover manufactured in high impact ABS, with a very attractive quality-price ratio.*

- Zero maintenance thanks to its brushless motor. Easy to clean
- Manual or automatic operating options
- Adjustable hand detection distance (M88APLUS)
- Quiet (only 57 dBA)
- Elegantly designed cover, manufactured in high impact ABS
- The heating element and the motor have built-in safety thermal cut-off
- Very attractive quality-price ratio



# HAND DRYERS juniorplus

push-button / sensor operated



**M88PLUS**

material: **ABS**  
finish: **white**



**M88APLUS**

material: **ABS**  
finish: **white**



## M88PLUS · M88APLUS COMPONENTS AND MATERIALS

### M88PLUS · M88APLUS

- One-piece cover fixed to the base by four screws
- Base in ABS thermoplastic
- Thermoplastic fan wheel
- PP UL 94-V0 centrifugal single inlet fan wheel
- Class F induction motor incorporating a safety thermal cut-off
- Heating element incorporating a safety thermal cut-off

- Zamak air outlet grill

### M88APLUS

- Electronic infrared detection sensor
- Adjustable detection distance 5 - 25 cm


### M88PLUS

- The button activates an electronic timer with a cycle of 45 seconds


## M88PLUS · M88APLUS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class II
Total power	1,640 W
Consumption	7 A
Motor power	140 W
r.p.m.	2,800
Heating element power	1,500 W
Weight	3 Kg
Cover thickness	3 mm
Drying time	38 sec
Air velocity	50 Km/h
Air temperature (10 cm distance / 21°C)	57°C
Sound pressure (at 2m)	57 dBA
Protection rating	IP21

**M88PLUS**



**M88APLUS**





## SMARTFLOW

*Compact hand dryer, strong and at a very competitive price.*

- Easy cleaning and maintenance
- Hygienic thanks to its automatic operation that prevents contact with the machine
- The heating element and the motor have built-in safety thermal cut-off
- Adjustable hand detection distance
- Quiet (67 dBA)
- Elegantly designed cover, manufactured in high impact ABS
- Economical



# HAND DRYERS smartflow®

sensor operated



**M04A**

material: **ABS**  
finish: **white**



**M04AC**

material: **ABS**  
finish: **bright grey**



**M04ACS**

material: **ABS**  
finish: **satin grey**

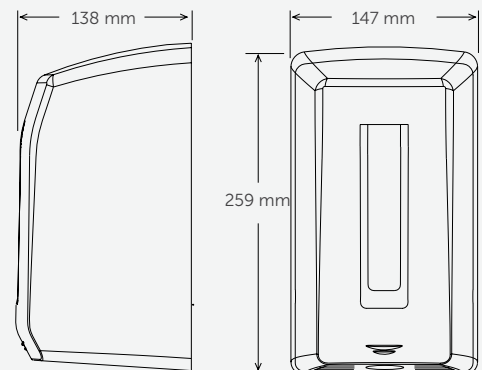


## M04A · M04AC · M04ACS COMPONENTS AND MATERIALS

- One-piece cover in ABS thermoplastic. Fixed to the base by two screws
- Thermoplastic base
- Class B brush motor incorporating a safety thermal cut-off
- Helicoidal fan wheel
- Heating element incorporates a safety thermal cut-off
- Electronic infrared detection sensor
- Adjustable detection distance 5 - 25 cm

## M04A · M04AC · M04ACS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class II
Total power	1,100 W
Consumption	4.8 A
Motor power	150 W
r.p.m.	15,000
Heating element power	950 W
Weight	1.2 Kg
Cover thickness	3 mm
Drying time	39 sec
Air velocity	100 Km/h
Air temperature (10 cm distance / 21°C)	55°C
Sound pressure (at 2m)	67 dBA
Protection rating	IP23





# HAND DRYERS

Table

## New Generation Hand Dryers

Dualflow Plus



Machflow



Speedflow Plus



Speedflow



Category	ECO-HIGH SPEED			
Application	HIGH TRAFFIC			
Drying time	8-15"			
Estimated drying time	8-15" (eco 10-15")	8-15" (eco 10-15")	10-12"	10-12"
Voltage / Frequency	220-240V 50/60Hz	220-240V 50/60Hz	100-240V 50/60Hz	100-240V 50/60Hz
Electrical isolation	Class I			
Measurements	665 x 320 x 228 mm	330 x 213 x 170 mm	270 x 290 x 100 mm	270 x 290 x 100 mm
Weight	8.3 Kg	5.1 Kg	3.8 Kg	3.2 Kg (model AF = 6,5 Kg)
Total power	420 - 1,500 W	420-1,500 W	1,010 - 1,150 W (H.E. on*) 110 - 250 W (H.E off)	675 - 850 W (H.E.(*) ON) 180 - 360 W (H.E. OFF)
Power consumption	3.2 A - 6.4 A	3.2 A - 6.4 A	4.2 A - 4.8 A (230 V) H.E. on 1.3 A - 2 A (230 V) H.E. off	4.2 A - 4.8 A (230 V) H.E. on 1.3 A - 2 A (230 V) H.E. off
Detection	Automatic			
Cover				
Material	ABS	1. Stainless Steel 2. Steel	1. Stainless Steel 2. Steel 3. Cast iron	1. Stainless Steel 2. Steel 3. Cast iron
Finish	White / Black / Satin	1. Bright / Satin 2. White / Black epoxy	1. Bright / Satin 2. White / Black epoxy 3. White enamelled coating	1. Bright / Satin 2. White / Black epoxy 3. White enamelled coating
Thickness	3 mm	1.5 mm	1.5 mm	1.5 mm (model AF = 4,5mm)
Base:				
Material	PA6 V0	PA6 + 30% GF V0	Aluminium	Aluminium
Thickness	3 mm	3 mm	3 mm	3 mm
Motor:				
Type	Vacuum universal brush motor	Vacuum universal brush motor	Universal brush motor	Universal brush motor
Class	F	F	A	F
Power	420 - 1,100 W	420 - 1,100 W	110 - 250 W	350 W
rpm	19,000-30,000 rpm	19,000-30,000 rpm	8,500-11,200 rpm	23,000 - 32,000 RPM
Bushes lifespan	1,500h / 600,000 serv (cicle=9")	1,500h / 600,000 serv (cicle=9")	1,500h / 450,000 serv (cicle=12")	1,500h / 450,000 serv (cicle=12")
Protection	Fuse on PCB	Fuse on PCB	Safety thermal cut-off au- to-reset	Safety thermal cut-off auto-reset
Fan Wheel				
Tipo	Centrifugal, single inlet, high pressure	Centrifugal, single inlet, high pressure	Double inlet, centrifugal, asymetrical	Centrifugal, single inlet, high pressure
Material	Aluminium			
Caract. Fluidicas				
Effective air flow	94 - 165 m <sup>3</sup> /h (1,570-2,750 L/min)	121 - 190 m <sup>3</sup> /h (2,010 - 3,152 L/min)	70-96 m <sup>3</sup> /h (1,170-1,600 L/m)	33.7 - 47.1 m <sup>3</sup> /h (563-785 L/min)
Air velocity	234- 410 Km/h	191-325 Km/h	120-180 Km/h	290-400 Km/h
Heating Element (H.E):				
Power	400W	400W	900 W	500 W
Wire	Ni-Crom			
Protection	Safety thermal cut-off			
Air temperature	40°C			
Sound pressure	62-72dBA	67-74 dBA	58-67dBA	57-65dBA
Protection level	IPX4			
Disconnection (continuous use time)	30"			
ADA	yes	w / recessed kit	yes	yes

(\*) H.E. = Heating element



# HAND DRYERS

Table

## Traditional Hand Dryers

Saniflow



Mediflow



HEAVY DUTY HIGH - TRAFFIC 20-30 " 29"	MODERN HIGH - TRAFFIC 20-30 " 29"
220-240V 50/60Hz Class I 245x276x214 mm 248x278x212 mm 255x282x215 mm	220-240V 50/60Hz Class II 325x275x164 mm
4.65 / 5.9 / 11.5 Kg 2.250 W 10 A	4.25 Kg 250-2.750 W 1,1-12 A
Autom / Push - button	Autom / Push - button
1. Stainless steel 2. Steel 3. Cast iron  1. Bright / Satin 2. White / Black epoxy; White / Black enamelled; Bright / Satin / Gold plated 3. White enamelled 1.5 / 6 mm	1. Stainless steel 2. Steel  1. Bright / Satin 2. White / Black epoxy 1.5 mm
Aluminium 3 mm	PA 6 V0 3 mm
Universal brush motor F 250 W 5,500 rpm 1st set 1,500h/200,000 serv 2nd set 1,500h/ 200,000 serv (cicle=29") Safety thermal cut-off auto-reset	Universal brush motor F 250 W 4,500 rpm 1st set 1,500h/200,000 serv 2nd set 1,500h/ 200,000 serv (cicle=29") Safety thermal cut-off auto-reset
Double inlet, centrifugal, asymmetrical Aluminium	Double inlet, centrifugal, asymmetrical Aluminium
253 m <sup>3</sup> /h (4,248 L/m) 100 Km/h	450 m <sup>3</sup> /h (7,500 L/m) 95 Km/h
2,000 W Ni-Crom Safety thermal cut-off	0-2,500 W Cr-Al-Fe Banda Safety thermal cut-off
50°C	49°C
70dBA	65dBA
IP23	IP23
E05,E88: 36" E05A= 60" E88A: ---	M02A: 120" M03A: ---
w / recessed kit	w / recessed kit

## Low Medium Traffic Range

Optima



Juniorplus



Smartflow












MONEY FOR VALUE		
MEDIUM TRAFFIC	LOW TRAFFIC	
30-40 "		
38"	38"	39"
220-240V 50/60Hz Class II 302x260x150 mm	220-240V 50/60Hz Class II 303x253x150 mm	220-240V 50/60Hz Class II 259x147x138 mm
4.45 Kg 1.640 W 7 A	3 Kg 1.640 W 7 A	1.2 Kg 1.100 W 4,8 A
Automatic	Autom/Push - button	Automatic
1. Stainless steel 2. Steel  1. Bright / Satin 2. White epoxy 1.5 mm	ABS  White 3 mm	ABS  1. White / Bright / Satin 3 mm
ABS V0 3 mm	ABS V0 3 mm	PP +Talcum 3 mm
Induction F 140 W 2,800 rpm ---	Induction F 140 W 2,800 rpm ---	Universal, brush motor B 150 W 15,000 rpm 1,000h/100,000 serv (cycle=39") Safety thermal cut-off auto-reset
Safety thermal cut-off auto-reset	Safety thermal cut-off auto-reset	Safety thermal cut-off auto-reset
Single inlet, centrifugal PP V0	Single inlet, centrifugal PP V0	Helicoidal PP V0
215 m <sup>3</sup> /h (3,590 L/m) 50 Km/h	215 m <sup>3</sup> /h (3,590 L/m) 50 Km/h	102 m <sup>3</sup> /h (1,700 L/m) 100 Km/h
1,500 W Ni-Crom 40 Safety thermal cut-off	1,500 W Ni-Crom 40 Safety thermal cut-off	950 W Ni-Crom Safety thermal cut-off
57°C	57°C	55°C
57dBA	57dBA	67dBA
IP21	IP21	IP23
60"	M88PLUS: 45" M88APLUS: 60"	60"
---	---	---



# HAND DRYERS

Table

	MODEL	OPERATION		MATERIAL / FINISH								
		manual	sensor	steel white epoxy	steel black epoxy	AISI 304 stainless steel bright	AISI 304 stainless steel satin	cast iron white enamelled coating	steel white enamelled coating	steel black enamelled coating	steel chrome bright	steel chrome satin
	<b>dualflow plus</b>											
	M14A		●									
	M14AB		●									
	M14ACS		●									
	<b>machflow</b>											
	M09A		●	●								
	M09AB		●		●							
	M09AC		●			●						
	M09ACS		●				●					
	<b>speedflow</b>											
	M06A		●	●								
	M06AB		●		●							
	M06AC		●			●						
	M06ACS		●				●					
	M06AF		●					●				
	M17A		●	●								
	M17AB		●		●							
	M17AC		●			●						
	M17ACS		●				●					
M17AF		●					●					
	<b>saniflow</b>											
	E05	●		●								
	E05B	●			●							
	E05C	●				●						
	E05CS	●					●					
	E85	●						●				
	E88	●							●			
	E88B	●								●		
	E88C	●									●	
	E88CS	●										●
	E88O	●										
	E05A		●	●								
	E05AB		●		●							
	E05AC		●			●						
	E05ACS		●				●					
	E85A		●					●				
	E88A		●						●			
	E88AB		●							●		
	E88AC		●								●	
	E88ACS		●									●
	E88AO		●									
	<b>mediflow</b>											
	M02A		●	●								
	M02AB		●		●							
	M02AC		●			●						
	M02ACS		●				●					
	M03A		●	●								
	M03AB		●		●							
	M03ACS		●			●						
	<b>optima</b>											
	M99A		●	●								
	M99AC		●			●						
	M99ACS		●				●					
	<b>juniorplus</b>											
	M88PLUS		●									
	M88PLUS	●	●									
	<b>smartflow</b>											
	M04A		●									
	M04AC		●									
	M04ACS		●									

# HAND DRYERS

Table

steel gold-plated	ABS white	ABS black	ABS grey bright	ABS grey satin	ADJUSTABLE DISTANCE DETECTION	ADJUSTABLE POWER	MOTOR		TRAFFIC FREQUENCY			MODEL
							induction	brush	HIGH	MEDIUM	LOW	
<b>dualflow plus</b>												
	●					●		●	●			M14A
		●				●		●	●			M14AB
				●		●		●	●			M14CS
<b>machflow®</b>												
					●	●		●	●			M09A
					●	●		●	●			M09AB
					●	●		●	●			M09AC
					●	●		●	●			M09ACS
<b>speedflow®</b>												
					●	●		●	●			M06A
					●	●		●	●			M06AB
					●	●		●	●			M06AC
					●	●		●	●			M06ACS
					●	●		●	●			M06AF
					●	●		●	●			M17A
					●	●		●	●			M17AB
					●	●		●	●			M17AC
					●	●		●	●			M17ACS
					●	●		●	●			M17AF
<b>saniflow®</b>												
								●	●			E05
								●	●			E05B
								●	●			E05C
								●	●			E05CS
								●	●			E85
								●	●			E88
								●	●			E88B
								●	●			E88C
								●	●			E88CS
●								●	●			E88O
					●			●	●			E05A
					●			●	●			E05AB
					●			●	●			E05AC
					●			●	●			E05ACS
					●			●	●			E85A
					●			●	●			E88A
					●			●	●			E88AB
					●			●	●			E88AC
					●			●	●			E88ACS
●					●			●	●			E88AO
<b>mediflow®</b>												
					●			●	●			M02A
					●			●	●			M02AB
					●			●	●			M02AC
					●			●	●			M02ACS
					●			●	●			M03A
					●			●	●			M03AB
					●			●	●			M03AC
					●			●	●			M03ACS
<b>optima</b>												
					●		●		●			M99A
					●		●		●			M99AC
					●		●		●			M99ACS
<b>juniorplus</b>												
	●				●		●		●			M88APLUS
	●						●		●			M88PLUS
<b>smartflow®</b>												
	●				●			●		●		M04A
			●		●			●		●		M04AC
				●	●			●		●		M04ACS

02

**HAIR DRYERS**

*have a great Hair Day!*








## HAIR DRYERS


*Public use hair dryers, especially designed for facilities with high traffic or individual use hair dryers.*

- Large variety of hair dryers in different designs, finishes and performances.
- The public use hair dryers are robust, reliable and especially designed to work in areas with high or very high traffic, such as sports facilities, swimming pools, children's play areas, campings, etc. They incorporate all the relevant safety and vandal proof measures for trouble-free operation in these high traffic areas.
- The individual use hair dryers are quiet, with a powerful flow of air and a long useful life. Compact and balanced models thanks to their light weight, direct current motors. Designed for use in hotel rooms, hospitals, old people's homes, etc. these hair dryers have a speed regulator that allows the best drying function to be chosen at any given time.



# HAIR DRYERS

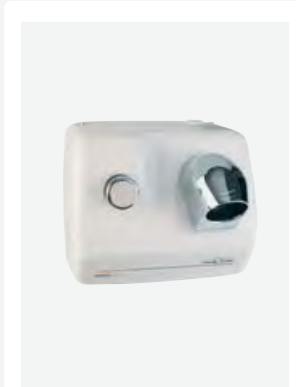public use / push-button




**SC0088H**

material: **steel**  
finish: **white enamelled coating**




**SC0088HCS**

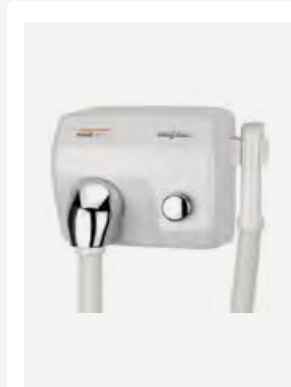material: **steel**  
finish: **satin chrome**



**SC1088HT**

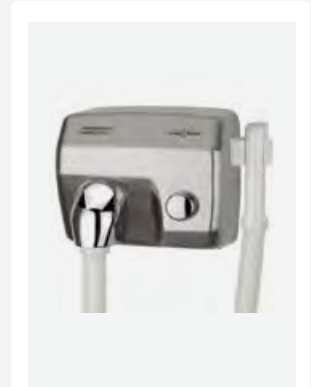material: **steel**  
finish: **white enamelled coating**



**SC1088HTCS**

material: **steel**  
finish: **satin chrome**



These models are also available with a white cast iron cover: SC0085H · SC1085HT

## SC0088H · SC0088HCS · SC1088HT · SC1088HTCS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow key®
- 3 mm thick aluminium base
- Fire resistant plastic UL 94-VO fan scroll
- Class F universal motor incorporating a safety
- Aluminium centrifugal double symmetrical inlet fan wheel
- Heating element protected by a safety thermal cut-off
- Nozzle in chrome-plated zamak®
- Zamak® chrome-plated button activates an electro-mechanic timer with a 90-second cycle

SC0088H · SC00HCS

- 360° revolving nozzle

SC1088HT · SC1088HTCS

- Extendable white polyurethane tube
- PBT thermoplastic air nozzle

## SC0088H · SC0088HCS · SC1088HT · SC1088HTCS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Motor power	250 W
r.p.m.	5500
Cover thickness	1.5 mm
Sound pressure (at 2m)	70 dBA

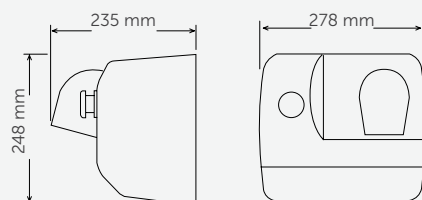
### SC0088H · SC0088HCS

Total power	2,250 W
Consumption	10 A
Weight	5.9 Kg
Heating element power	2,000 W
Air temperature	53°C


### SC1088HT · SC1088HTCS

Total power	1,000 W
Consumption	4.5 A
Heating element power	750 W
Air temperature	40°C

### SC0088H · SC0088HCS



### SC1088HT · SC1088HTCS

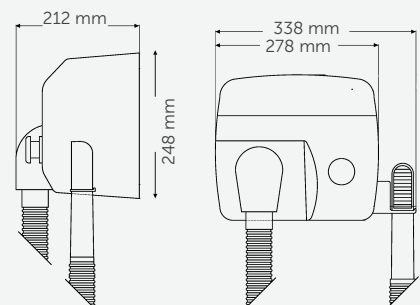



# HAIR DRYERS

*public use / automatic*



**SC0009**

material: **stainless steel**  
finish: **white epoxy**



**SC0009CS**

material: **stainless steel**  
finish: **satin**

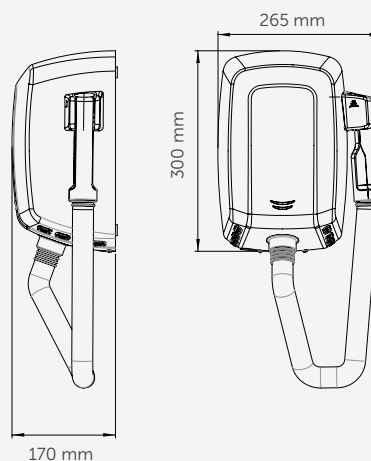


## SC0009 · SC0009CS COMPONENTS AND MATERIALS

- One-piece weld-free cover
- Turns on automatically on unhooking the handle
- Class F high pressure universal brush motor
- Maximum air velocity: 205 Km/h
- Motor power is adjustable, allowing electricity consumption to be regulated
- Heating element protected by a safety thermal cut-off.
- Extendable white polyurethane tube.
- Connector piece of the dryer with the tube made of PBT thermoplastic.
- Handle and handle support made in ABS
- The base includes four silent-blocks to cushion mechanical vibrations
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use
- The dryer optionally incorporates the Machflow® "Plug-in" technology that facilitates the installation and removal of the hand dryer ("Plug-In" kit code KT009). This technology is an easy, practical, fast and secure system to install and uninstall the unit, making maintenance much more efficient and reducing at the same time its costs.

## SC0009 · SC0009CS TECHNICAL SPECIFICATIONS

Voltage	220-240 V
Frequency	50 - 60 Hz
Electrical Isolation	Class I
Total power	200 - 1.000 W
Consumption	2.4 - 5.2 A
Motor power	200 - 400 W
rpm	14,000 - 19,000
Heating element power	0-600 W (on/off switch)
Weight	5.6 Kg
Air velocity	140 - 205 Km/h
Air temp. (d=10 cm and room temp=21°C)	45°C
Sound pressure (at 2m)	65-73 dBA
Length of the hose	800-2,000 mm
Protection rating	IP23



# HAIR DRYERS

*individual use / automatic*



**SC0004**

material: **ABS**  
finish: **white**



**SC0087**

material: **polycarbonate**  
finish: **white**



**SC0088**

with shaver sockets

material: **polycarbonate**  
finish: **white**



## SC0004 · SC0087 · SC0088 COMPONENTS AND MATERIALS

### SC0004 · SC0087 · SC0088

- The heating element includes a safety thermal cut-off
- Turns on automatically on unhooking the hand piece
- White ABS thermoplastic handle. With internal thermal reinforcement; there is no danger if the hand piece falls into water

### SC0004

- PBT thermoplastic casing
- Class B brush motor incorporating a safety thermal cut-off
- PP UL94-V0 helicoidal fan wheel
- Extendable white polyurethane tube. Fixed to rotating bearings that prevent it from rolling back on itself

### SC0087 · SC0088

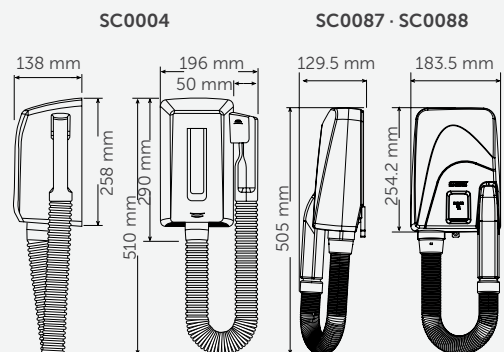
- Weld-free housing in self-extinguishing polycarbonate UL 94 V Ø
- DC motor, includes a thermal overload switch
- Thermoplastic axial turbine
- Heating element incorporates safety thermal cut-off
- Extendable white polyurethane tube
- Speed selector with three settings
- Plug with 1.000 mm power card

### SC0088

- Two sockets for shaver, 115 or 220 V

## SC0004 · SC0087 · SC0088 TECHNICAL SPECIFICATIONS

SC0004 · SC0087 · SC0088		SC0004	
Voltage	220-240 V	Total power	850 W
Frequency	50 / 60 Hz	Consumption	3 A
Electrical Isolation	Class II	Motor power	150 W
Air temp. (d=10 cm and room temp=21°C)	50°C	r.p.m	15,000
Installation height	1,300 - 1,500 mm	Heating element power	7 00 W
SC0087 · SC0088		Cover thickness	3 mm
Total power	600 - 1,100 W	Effective airflow	40 m <sup>3</sup> / h (667 l / min)
Consumption	2.6 A - 5.2 A	Air velocity	79 Km / h
Motor power	60 W	Sound pressure (at 2 m)	69 dBA
r.p.m	4,000 - 5,000	Protection rating	IP23
Cover thickness	1.5 mm	Tube length	800 - 2,000 mm
Effective airflow	65 m <sup>3</sup> / h (1,080 l / min)		
Air velocity	55 Km / h		
Sound pressure (at 2 m)	68 dBA		
Protection rating	IP20		
Tube length	550 - 1,800 mm		




# HAIR DRYERS

*individual use / push - button*



**SC0010**

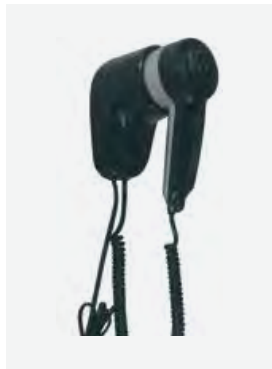material: **ABS**  
finish: **white**



**SC0010CS**

material: **ABS**  
finish: **black**



**SC0020**

material: **ABS**  
finish: **white**



**SC0020CS**

material: **ABS**  
finish: **black**



Exclusive individual use bathroom wall mounting hair dryers with a functional, robust and trendy design that blends into any space perfectly such as hotels, hospitals or elderly care centers.

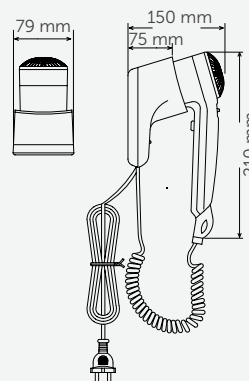
## SC0010 · SC0010CS · SC0020 · SC0020CS COMPONENTS AND MATERIALS

- Hairdryer with on / off switch and polypropylene flow-direction nozzle
- Heavy-duty 650-1800 mm coiled power cord
- Plug with 1,000 mm power cord
- ABS wall support
- Speed selector (two settings)
- The motor incorporates a safety thermal cut-off
- Polycarbonate turbine


## SC0010 · SC0010CS · SC0020 · SC0020CS TECHNICAL SPECIFICATIONS

Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class II
Total power	540 - 1,240 W
Consumption	2.7 - 4.9 A
Motor power	40 W
r.p.m.	1,1000 - 1,3000
Heating element power	1,200 W
Weight	0.7 Kg
Effective airflow	73 m <sup>3</sup> / h (1,217 l / min)
Air velocity	54 Km / h
Air temperature (10 cm distance / 21°C)	61°C
Sound pressure (at 2m)	60 dBA
Installation height	1,300 - 1,500 mm
Cable lenght	610 - 1,800 mm

SC0010 · 10CS




SC0020 · SC0020CS

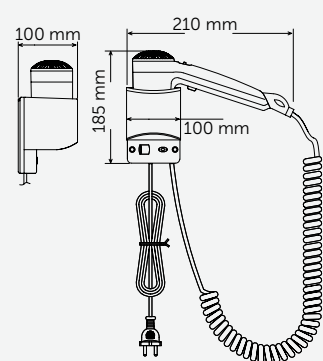


# HAIR DRYERS

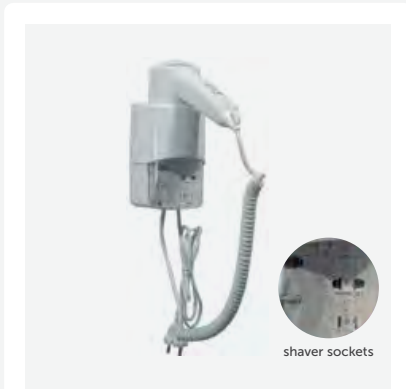individual use / push - button




**SC0030**  
with shaver sockets

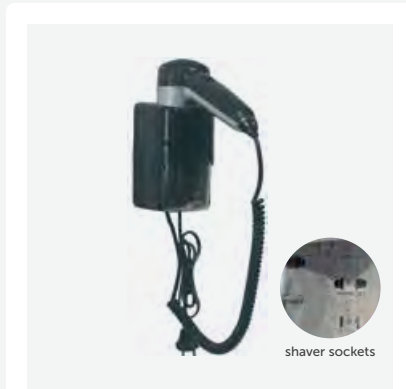material: **ABS**  
finish: **white**



**SC0030CS**  
with shaver sockets

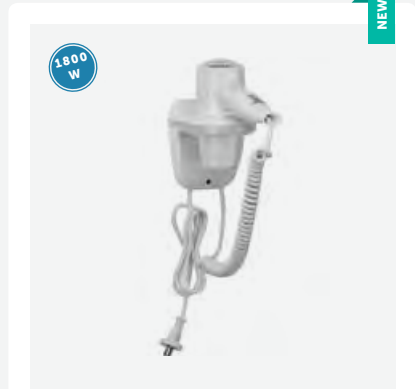material: **ABS**  
finish: **black**



**SC0040**

material: **ABS**  
finish: **white**



Exclusive individual use bathroom wall mounting hair dryers with a functional, robust and trendy design that blends into any space perfectly such as hotels, hospitals or elderly care centers.

## SC0030 · SC0030CS · SC0040 COMPONENTS AND MATERIALS

- Hairdryer with on/off switch and polypropylene air flow nozzle
- Heavy-duty 650-1,800 mm coiled power cord
- Plug with 1,000 mm power cord
- ABS wall support
- Speed selector (two settings)
- The motor incorporates a safety thermal cut-off
- Polycarbonate turbine

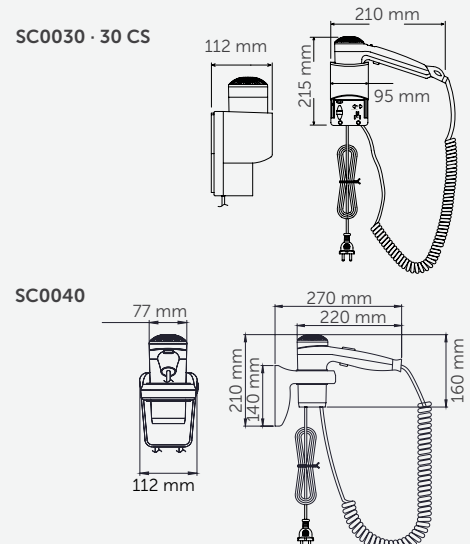
### SC0030 · SC0030CS

- Two sockets for shaver, 115 or 220 V, protected by a transparent plastic box

## SC0030 · SC0030CS · SC0040 TECHNICAL SPECIFICATIONS




SC0030 · SC0030CS	
Voltage	220- 240 V
Frequency	50/60 Hz
Electrical Isolation	Class II
Total power	540-1,240 W
Consumption	2.7 – 4.9 A
Motor power	40 W
rpm	11,000-13,000
Heating element power	1,200 W
Weight	1.3 Kg
Effective airflow	73 m <sup>3</sup> /h (1,217 L/min)
Air velocity	54 Km/h
Air temperature (10 cm distance/21°C)	61°C
Sound pressure (at 2m)	60 dBA
Installation height	1,300–1,500 mm
Cable lenght	610–1,800 mm

SC0040	
Voltage	220-240 V
Frequency	50/60 Hz
Electrical Isolation	Class II
Total power	200–1,800 W
Consumption	0.9 – 7 A
Motor power	170 W
rpm	9,000 - 18,000
Heating element power	1,600 W
Weight	0.8 Kg
Effective airflow	80 m <sup>3</sup> /h (1,330 L/min)
Air velocity	60 Km/h
Air temperature (10 cm distance/21°C)	63°C
Sound pressure (at 2m)	68 dBA
Protection rating	IP20
Installation height	1,300–1,500 mm
Cable lenght	610–1,800 mm



# HAIR DRYERS

Table

	MODEL	USE		OPERATION		MATERIAL / FINISH						
		Public	Individual	Manual	Auto- matic	Steel white porcelain enam- elled	Steel satin chrome	Stainless steel white epoxy	Sainles steel satin chrome	Poly- car- bonate white	ABS white	ABS black
	SC0088H	•		•		•						
	SC0088HCS	•		•			•					
	SC1088HT	•		•		•						
	SC1088HTCS	•		•			•					
	SC0009	•			•			•				
	SC0009CS	•			•				•			
	SC0004		•		•						•	
	SC0087		•		•					•		
	SC0088		•		•					•		
	SC0010		•	•							•	
	SC0010CS		•	•								•
	SC0020		•	•							•	
	SC0020CS		•	•								•
	SC0030		•	•							•	
	SC0030CS		•	•								•
	SC0040		•	•							•	

# HAIR DRYERS

Table

SPEED SELECTOR	OPERATING TIMER		ADDITIONAL THERMAL CUT-OFF SAFETY COMPONENTS	SOCKET FOR ELECTRIC SHAVER	SUITABLE FOR			MODEL
	90"	60"			Gyms and sport centres	Hospitals and health centres	Hotels and other accommodation	
	•		•		•			SC0088H
	•		•		•			SC0088HCS
	•		•		•			SC1088HT
	•		•		•			SC1088HTCS
		•	•		•			SC0009
		•	•		•			SC0009CS
	•		•			•	•	SC0004
•	•		•			•	•	SC0087
•			•	•		•	•	SC0088
•			•			•	•	SC0010
•			•			•	•	SC0010CS
•			•			•	•	SC0020
•			•			•	•	SC0020CS
•			•	•		•	•	SC0030
•			•	•		•	•	SC0030CS
•			•			•	•	SC0040



## **SOAP DISPENSERS**

*keeping up healthy habits*









## SOAP DISPENSERS

*Large range of easy maintenance soap dispensers*

- Large selection of soap dispensers manufactured in various materials (stainless steel, plastic, etc.), different finishes (white, black, brushed, bright, etc.) different capacities (from 0.8 to 1.5 l) and different operating methods (automatic, push button, lever, etc.) for wall installation or recessed in the countertop
- Suitable for various types of soap (liquid, foam, spray), depending on the model
- Refillable soap tanks
- Exterior sight glass for soap level
- Lock with special key for protection against vandals

# SOAP DISPENSERS

surface

## AUTOMATIC



INNER TANK OF PP


**DJ0037A**   
liquid soap

**DJF0038A**   
foam

capacity: **1 L**  
material: **AISI 304 stainless steel**  
finish: **white epoxy**



INNER TANK OF PP


**DJ0037AB**   
liquid soap

**DJF0038AB**   
foam

capacity: **1 L**  
material: **AISI 304 stainless steel**  
finish: **matte black epoxy**



INNER TANK OF PP

**DJ0037AC**   
liquid soap

**DJF0038AC**   
foam

capacity: **1 L**  
material: **AISI 304 stainless steel**  
finish: **bright**



INNER TANK OF PP

**DJ0037ACS**   
liquid soap

**DJF0038ACS**   
foam

capacity: **1 L**  
material: **AISI 304 stainless steel**  
finish: **satin**



Automatic soap dispenser activated by means of an infrared sensor and manufactured in AISI 304 stainless steel. Liquid or foam soaps can be used depending on the chosen valve.

“Touch-free” operation reduces the risk of germs and cross-contamination during the washing process because the user does not have to touch the soap dispenser. It promotes health and wellness by preventing the spread of infectious diseases.

### DJ0037A · DJF0038A · DJ0037AB · DJF0038AB · DJ0037AC · DJF0038AC · DJ0037ACS · DJF0038ACS COMPONENTS AND MATERIALS

- Infra-Red detection (5 cm hand detection)
- Vandal resistant casing with lock
- Frontal content viewer
- Corrosion-resistant anti-drip valve
- Inner plastic tank, easily removable for cleaning
- Hinged cover for operator convenience and speed of service
- Opening on top with provided Mediclinics standard key
- Operates on 6 AA alkaline batteries (not included)
- Up to 20.000 doses per battery set

### DJ0037A · DJF0038A · DJ0037AB · DJF0038AB · DJ0037AC · DJF0038AC · DJ0037ACS · DJF0038ACS TECHNICAL SPECIFICATIONS

DJ0037A · DJF0038A · DJ0037AB · DJF0038AB · DJ0037AC · DJF0038AC

**DJ0037ACS · DJF0038ACS**

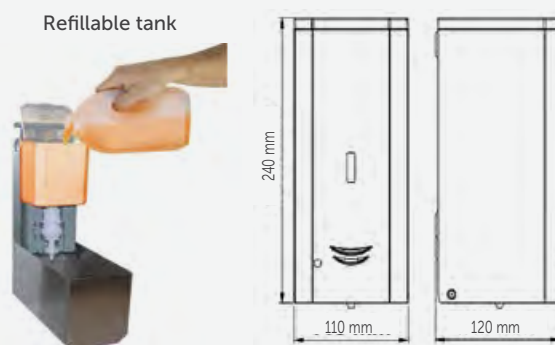
Capacity	1.0 L
Stainless steel thickness	0.8 mm
Weight (empty)	1.25 Kg
Recommended installation height	25 – 30 cm from countertop/shelf

**DJ0037A · DJ0037AB · DJ0037AC · DJ0037ACS**

Suitable soaps	Liquid soap
Quantity dispensed per pump	1.5 ml

**DJF0038A · DJF0038AB · DJF0038AC · DJF0038ACS**

Suitable soaps	Foam soap
Quantity dispensed per pump	1 ml



# SOAP DISPENSERS

surface / recessed

## AUTOMATIC



UP TO 17,000 DOSES  
PER BATTERY SET

### DJ0160AS

capacity: 0.8 L

material: aluminium / ABS  
finish: chrome / black



### DJ0252AC

capacity: 1.6 L

material: chrome-plated brass  
finish: bright



## DJ0160AS · DJ0252AC COMPONENTS AND MATERIALS

### DJ0160AS

- Automatic operation triggered by infrared sensors
- LED flashes when the batteries need to be replaced
- Suitable for neutral pH, chlorine-free liquid hand soap
- Suitable for disinfectant solutions, liquid soaps or hydroalcoholic gel
- Frontal content viewer
- Lock and special key supplied
- Transparent polyethylene tank
- ABS body with aluminium cover

### DJ0252AC

- Automatic soap dispenser for recessing to the countertop with infra-Red detection

- The dispenser can be located on the left or right of the countertop
- Auto adjustment of the sensing range
- Refillable soap plastic tank made of PE, easily removable for emptying and cleaning
- Operates on 4 x D 1.5 V alkaline batteries. Standby power consumption < 100 µA and service power consumption < 1 A
- Suitable for soaps with a viscosity 2,000 – 3,500 cP and with neutral pH
- LED indicator: Continuous red LED = Batteries low voltage; Flashing blue LED = Low soap level; Flashing red LED = Malfunction or the sensor is detecting an object.

## DJ0160AS · DJ0252AC TECHNICAL SPECIFICATIONS


### DJ0160AS

Capacity	0.8 L
Weight (empty)	0.75 Kg
Recommended installation height	20 – 25 cm from countertop
Suitable soaps	Chlorine-free hand soap with neutral pH, disinfectant solutions, liquid soaps and hydroalcoholic gel
Quantity dispensed per pump	1 ml


### DJ0252AC

Capacity	1.6 L
Weight (empty)	0.95 Kg
Suitable soaps	Soaps with a viscosity 2,000 – 3,500 cP and with neutral pH
Quantity dispensed per pump	0.8 – 2.2 ml
Protection rating	IP43

### DJ0160AS



### DJ0252AC

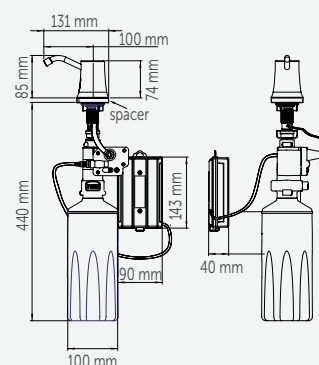

# SOAP DISPENSERS

surface / push - button



INNER TANK OF PP

**DJ0031**   
liquid soap


**DJF0032**   
foam

**DJS0033**   
spray

capacity: **1,5 L**

material: **AISI 304 stainless steel**

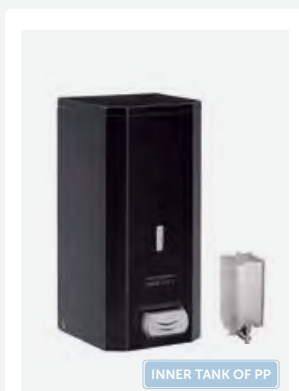finish: **white epoxy**



INNER TANK OF PP

**DJ0031B**   
liquid soap


**DJF0032B**   
foam

**DJS0033B**   
spray

capacity: **1,5 L**

material: **AISI 304 stainless steel**

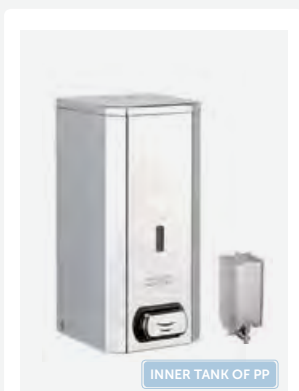finish: **matte black epoxy**



INNER TANK OF PP

**DJ0031C**   
liquid soap

**DJF0032C**   
foam

**DJS0033C**   
spray

capacity: **1,5 L**

material: **AISI 304 stainless steel**

finish: **bright**



INNER TANK OF PP

**DJ0031CS**   
liquid soap

**DJF0032CS**   
foam

**DJS0033CS**   
spray

capacity: **1,5 L**

material: **AISI 304 stainless steel**

finish: **satin**



**DJ0031 · DJF0032 · DJS0033 · DJ0031B · DJF0032B · DJS0033B · DJ0031C · DJF0032C · DJS0033C · DJ0031CS · DJF0032CS · DJS0033CS** COMPONENTS AND MATERIALS

- Vandal resistant casing with lock
- Frontal content viewer
- Stainless steel push-button
- Corrosion-resistant anti-drip valve
- Inner tank 2.5 mm thick made of translucent polypropylene
- Easily removable inner tank
- Hinged cover for operator convenience and speed of service
- Opening on top with provided Mediclinics standard key

**DJ0031 · DJ0031B · DJ0031C · DJ0031CS**

- Admits liquid soap or hydro-alcoholic gel

**DJF0032 · DJF0032B · DJF0032C · DJF0032CS**


- Exclusive use for foam soap

**DJS0033 · DJS0033B · DJS0033C · DJS0033CS**

- Exclusive use for disinfectant liquids

INTERCHANGEABLES VALVES

ONE SOAP DISPENSER, 3 POSSIBLE VALVES!




liquid soap    foam    spray

RCDJ0031 V / RCDJF0032 V / RCDJS0033 V1

**DJ0031 · DJF0032 · DJS0033 · DJ0031B · DJF0032B · DJS0033B · DJ0031C · DJF0032C · DJS0033C · DJ0031CS · DJ0032CS · DJ0033CS** TECHNICAL SPECIFICATIONS

Capacity	1.5 L
Stainless steel thickness	0.8 mm
Weight (empty)	1.25 Kg
Recommended installation height	15 - 20 cm from countertop
<b>DJ0031 · DJ0031B · DJ0031C · DJ0031CS</b>	
Suitable soaps	Liquid soaps and hydroalcoholic gels
Quantity dispensed per pump	1.5 ml
<b>DJF0032 · DJF0032B · DJF0032C · DJF0032CS</b>	
Suitable soaps	Foam soaps
Quantity dispensed per pump	1 ml
<b>DJS0033 · DJS0033B · DJS0033C · DJS0033CS</b>	
Suitable soaps	Liquid disinfectant soaps
Quantity dispensed per pump	0.8 ml

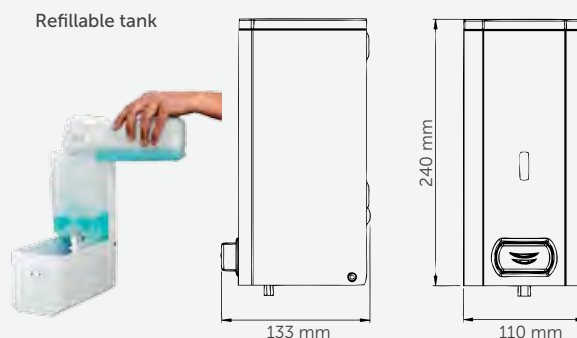

# SOAP DISPENSERS

surface / push - button



INNER TANK OF PP

## DJ0040

capacity: 1,5 L

material: AISI 304 stainless steel  
finish: white epoxy



INNER TANK OF PP

## DJ0040B

capacity: 1,5 L

material: AISI 304 stainless steel  
finish: matte black epoxy



INNER TANK OF PP

## DJ0040C

capacity: 1,5 L

material: AISI 304 stainless steel  
finish: bright



INNER TANK OF PP

## DJ0040CS

capacity: 1,5 L

material: AISI 304 stainless steel  
finish: satin



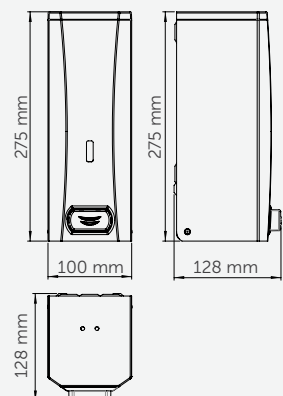
### DJ0040 · DJ0040B · DJ0040C · DJ0040CS COMPONENTS AND MATERIALS

- Vandal resistant casing with lock
- Frontal content viewer
- Stainless steel push-button
- Corrosion-resistant anti-drip valve
- Inner tank made of 2,5 mm thickness translucent polypropylene
- Easily removable inner tank
- Hinged cover for operator convenience and speed of service
- Opening on top with provided mediclinics key that allows soap refill
- Allows disinfectant solutions, liquid soap or hydro-alcoholic gel

### DJ0040 · DJ0040B · DJ0040C · DJ0040CS TECHNICAL SPECIFICATIONS

Capacity	1.5 L
Stainless steel thickness	0.8 mm
Weight (empty)	1.2 Kg
Recommended installation height	15 – 20 cm from countertop
Suitable soaps	disinfectant solutions, liquid soaps or hydro-alcoholic gel
Quantity dispensed per pump	0.8 ml

Refillable tank



# SOAP DISPENSERS

surface / push - button



**DJ0112C**  
capacity: 1,1 L  
material: **AISI 304 stainless steel**  
finish: **bright**

---

**DJ0112CS**  
capacity: 1,1 L  
material: **AISI 304 stainless steel**  
finish: **satin**

INNER TANK OF PE



**DJ0111C**  
capacity: 1,1 L  
material: **AISI 304 stainless steel**  
finish: **bright**

---

**DJ0111CS**  
capacity: 1,1 L  
material: **AISI 304 stainless steel**  
finish: **satin**

INNER TANK OF PE

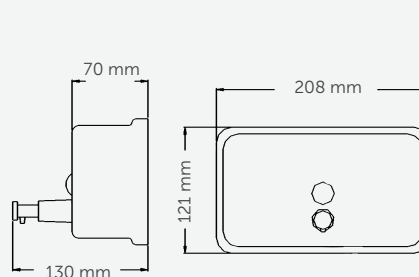
## DJ0112C · DJ0112CS · DJ0111C · DJ0111CS COMPONENTS AND MATERIALS

- Stainless steel body
- Fully welded structure
- Frontal content viewer
- Lock and special key supplied
- Suitable for chlorine-free hand soap with a neutral pH
- Polyethylene inner tank
- Chromed brass piston
- Chrome-plated ABS thermoplastic valve


## DJ0112C · DJ0112CS · DJ0111C · DJ0111CS TECHNICAL SPECIFICATIONS

DJ0112C · DJ0112CS · DJ0111C · DJ0111CS	
Capacity	1.1 L
Stainless steel thickness	1 mm
Weight (empty)	0.7 Kg
Recommended installation height	10-15 cm to countertop
Suitable soaps	chlorine-free hand soap with a neutral pH
Quantity dispensed per pump	1.1 ml

DJ0112C · DJ0112CS




DJ0111C · DJ0111CS




# SOAP DISPENSERS

surface / push - button



**DJ0115C**  
capacity: **1,3 L**

material: **AISI 304 stainless steel**  
finish: **bright**



**DJ0115CS**  
capacity: **1,3 L**

material: **AISI 304 stainless steel**  
finish: **satin**

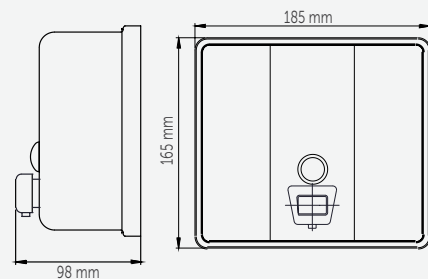
## DJ0115C · DJ0115CS COMPONENTS AND MATERIALS

- Stainless steel body
- Fully welded structure
- Inner tank made of polyethylene to prevent oxidation
- Black ABS thermoplastic push-button
- Suitable for chlorine-free hand soap with a neutral pH

## DJ0115C · DJ0115CS TECHNICAL SPECIFICATIONS

### DJ0115C · DJ0115CS

Capacity	1.3 L
Stainless steel thickness	1 mm
Weight (empty)	0.7 Kg
Recommended installation height	10 – 15 cm from countertop
Suitable soaps	Chlorine-free hand soap with neutral pH
Quantity dispensed per pump	0.7 ml



# SOAP DISPENSERS

surface / push-button



**DJ0010F**  
capacity: **1,1 L**

material: **ABS**  
finish: **white / smoked**



**DJ0020F**  
capacity: **1,1 L**

material: **ABS**  
finish: **black / smoked**

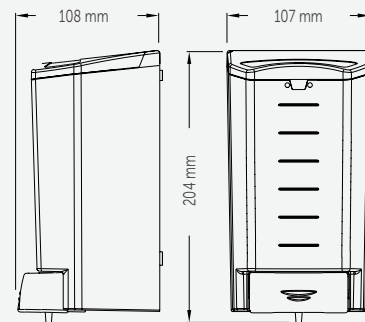


## DJ0010F · DJ0020F COMPONENTS AND MATERIALS

- ABS thermoplastic lid
- Standard mediclinics lock and key®
- ABS thermoplastic push-button
- SAN thermoplastic tank
- Corrosion-resistant anti-drip valve
- Suitable for chlorine-free hand soap with a neutral pH
- Suitable for disinfectant solutions, liquid soaps or hydroalcoholic gel

## DJ0010F · DJ0020F TECHNICAL SPECIFICATIONS

Capacity	1.1 L
Body thickness	3 mm
Weight (empty)	0.3 Kg
Recommended installation height	15 - 20 cm to countertop
Suitable soaps	chlorine-free hand soap with a neutral pH, disinfectant solutions, liquid soaps or hydroalcoholic gel
Quantity dispensed per pump	1.2 ml





# SOAP DISPENSERS

surface / lever



INNER TANK OF PP

**DJP0034**   
liquid soap

**DJFP035**   
foam

**DJSP036**   
spray

capacity: **1.5 L**  
material: **AISI 304 stainless steel**  
finish: **white epoxy**



INNER TANK OF PP

**DJP0034B**   
liquid soap

**DJFP035B**   
foam

**DJSP036B**   
spray

capacity: **1.5 L**  
material: **AISI 304 stainless steel**  
finish: **matte black epoxy**



INNER TANK OF PP

**DJP0034C**   
liquid soap

**DJFP035C**   
foam

**DJSP036C**   
spray

capacity: **1.5 L**  
material: **AISI 304 stainless steel**  
finish: **bright**



INNER TANK OF PP

**DJP0034CS**   
liquid soap

**DJFP035CS**   
foam

**DJSP036CS**   
spray

capacity: **1.5 L**  
material: **AISI 304 stainless steel**  
finish: **satin**



## DJP0034 · DJFP035 · DJSP036 · DJP0034B · DJFP035B · DJSP036B · DJP0034C · DJFP035C · DJSP036C · DJP0034CS · DJFP035CS · DJSP036CS COMPONENTS AND MATERIALS

- Vandal resistant casing with lock
- Frontal content viewer
- Actuated by means of a stainless steel lever
- Corrosion-resistant anti-drip valve
- Inner tank, 2.5 mm thick of translucent polyethylene
- Easily removable inner tank
- Hinged cover for operator convenience and speed of service

- Opening on top with provided Mediclinics standard key
- DJP0034 · DJP0034B · DJP0034C · DJP0034CS**
- Admits liquid soap or hydro-alcoholic gel
- DJFP035 · DJFP035B · DJFP035C · DJFP035CS**
- Exclusive use for foam soap
- DJSP036 · DJSP036B · DJSP036C · DJSP036CS**
- Exclusive use for disinfectant liquids

ONE SOAP DISPENSER,  
3 POSSIBLE VALVES!



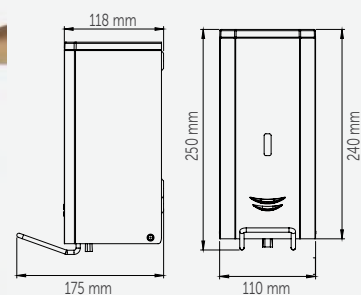
INTERCHANGEABLES VALVES

liquid soap foam spray  
RCDJ0031 V / RCDJF0032 V / RCDJS0033 V1

## DJP0034 · DJFP035 · DJSP036 · DJP0034B · DJFP035B · DJSP036B · DJP0034C · DJFP035C · DJSP036C · DJP0034CS · DJFP035CS · DJSP036CS TECHNICAL SPECIFICATIONS

Capacity	1.5 L
Stainless steel thickness	0.8 mm
Weight (empty)	1.35 Kg
Recommended installation height	15 – 20 cm from countertop
<b>DJP0034 – DJP0034B – DJP0034C – DJP0034CS</b>	
Suitable soaps	Liquid soaps and hydro-alcoholic gels
Quantity dispensed per pump	1.5 ml
<b>DJFP035 – DJFP035B – DJFP035C – DJFP035CS</b>	
Suitable soaps	Foam soaps
Quantity dispensed per pump	1 ml
<b>DJSP036 – DJSP036B – DJSP036C – DJSP036CS</b>	
Suitable soaps	Liquid disinfectant soaps
Quantity dispensed per pump	0.8 ml

### Refillable tank



# SOAP DISPENSERS

*recessed / push button*



## DJE0010CS

capacity: **1.4 L**

material: **AISI 304 stainless steel**  
finish: **satin**



## DJT118

capacity: **0.95 L**

material: **chrome-plated brass**  
finish: **bright**



## DJE0010CS · DJT118 COMPONENTS AND MATERIALS

### DJE0010CS

- Recessed soap dispenser made of AISI 304 stainless steel
- Chromed brass push button
- Inner plastic tank
- Lock with a supplied special key
- One-piece frontal part
- Frontal content viewer
- Anti-drip valve
- Suitable for chlorine-free hand soap with a neutral pH

### DJT118

- Removable valve for refiling in the upper part
- Vandal-resistant polyethylene tank
- Lock and special key supplied
- Suitable for chlorine-free hand soap with a neutral pH of 5,5, disinfectant solutions, liquid soaps and hydroalcoholic gel
- Bright finish chromed brass piston and spout, 90 mm long
- Fixed push-button

## DJE0010CS · DJT118 TECHNICAL SPECIFICATIONS



### DJE0010CS

Stainless steel thickness	0.8 mm
Weight (empty)	1.4 Kg
Recommended installation height	15-20 cm from countertop
Suitable soaps	Chlorine-free hand soap with neutral pH
Quantity dispensed per pump	1.1 ml


### DJT118

Weight (empty)	0.425 Kg
Recommended installation height	10 –15 cm from countertop
Suitable soaps	Chlorine-free hand soap with neutral pH of 5.5, disinfectant solutions, liquid soaps and hydro alcoholic gel
Quantity dispensed per pump	1 ml
Countertop hole	Ø 25 mm
Escutcheon	Ø 50 mm
Shank length	118 mm

### DJE0010CS







### DJT118



# SOAP DISPENSERS

Table

	MODEL	OPERATION		MATERIAL / FINISH							TANK	RECESSED
		manual	autom.	AISI 304 stainless steel white	AISI 304 stainless steel matte black	AISI 304 stainless steel bright	AISI 304 stainless steel satin	chrome plated brass	aluminum /ABS	ABS	thermo-plastic	
	DJ0037A-B-C-CS		•	•	•	•	•				•	
	DJF0038A-B-C-CS		•	•	•	•	•				•	
	DJ0160AS		•						•		•	
	DJ0252AC		•					•			•	•
	DJ0031-B-C-CS	•		•	•	•	•				•	
	DJF0032-B-C-CS	•		•	•	•	•				•	
	DJS0033-B-C-CS	•		•	•	•	•				•	
	DJ0040	•		•							•	
	DJ0040B				•						•	
	DJ0040C	•				•					•	
	DJ0040CS	•					•				•	
	DJ0112C	•				•					•	
	DJ0112CS	•					•				•	
	DJ0111C	•				•					•	
	DJ0111CS	•					•				•	
	DJ0115C	•				•					•	
	DJ0115CS	•					•				•	
	DJ0010F	•								•	•	
	DJ0020F	•								•	•	
	DJP0034-B-C-CS	•		•	•	•	•				•	
	DJFP035-B-C-CS	•		•	•	•	•				•	
DJSP036-B-C-CS	•		•	•	•	•				•		
	DJE0010CS	•					•				•	•
	DJT118	•						•			•	•

Suitable soaps table				
Soap dispenser code	Type of pump	Spare part Code	Allowed soaps	Density (Kg/dm <sup>3</sup> )
DJ0031-B-C-CS DJP0034-B-C-CS DJ0037A-B-C-CS	SOAP PUMP	RCDJ0031-V	Liquid soaps and hydroalcoholic gels	0.9 – 1.35
DJF0032-B-C-CS DJFP035-B-C-CS DJF0038A-B-C-CS	FOAM PUMP	RCDJF0032-V	Foam soaps	0.95 – 1.05
DJS0033-B-C-CS DJSP036-B-C-CS	SPRAY PUMP	RCDJS0033-V1	Liquid disinfectant soaps <sup>(1)</sup>	0.8

(1) Maximum content of 85% of alcohol

# SOAP DISPENSERS

Table

INSTALLATION		CAPACITY								TYPES OF SOAP				MODEL
Vert.	Horiz.	1.6 L	1.50 L	1.4 L	1.3 L	1.10 L	1 L	0.95 L	0.80 L	Neutral PH	Disinfectant	Foam	Spray	
•							•			•				DJ0037A-B-C-CS
•							•					•		DJF0038A-B-C-CS
•									•	•	•			DJ0160AS
•		•								•				DJ0252AC
•			•							•	•			DJ0031-B-C-CS
•			•									•		DJF0032-B-C-CS
•			•								•		•	DJS0033-B-C-CS
•			•							•	•			DJ0040
•			•							•				DJ0040B
•			•							•	•			DJ0040C
•			•							•	•			DJ0040CS
	•					•				•				DJ0112C
	•					•				•				DJ0112CS
•						•				•				DJ0111C
•						•				•				DJ0111CS
	•				•					•				DJ0115C
	•				•					•				DJ0115CS
•						•				•	•			DJ0010F
•						•				•	•			DJ0020F
•			•							•	•			DJP0034-B-C-CS
•			•									•		DJFP035-B-C-CS
•			•										•	DJSP036-B-C-CS
	•			•						•				DJE0010CS
•								•		•	•			DJT118

01

**TOILET PAPER  
DISPENSERS**

*we wrap you in confort*



A modern bathroom with a white toilet, a window with plants, and wall-mounted dispensers. The room features light-colored wood paneling on the left wall and a large window with a view of greenery. Three potted plants are on the windowsill. On the right wall, there are two white wall-mounted dispensers above the toilet, a white toilet paper dispenser to the right of the toilet, and a silver bidet sprayer on the floor next to the toilet. The floor is light-colored tile.

## TOILET PAPER DISPENSERS

*For paper roll, standard roll  
(2 or 3 units) or paper towels*

- Wide variety of toilet paper dispensers that are functional and straightforward to integrate into any toilet facility environment. Manufactured in various materials (steel, stainless steel, etc.) and in different finishes (white, black, bright, satin, etc.).
- Solutions that accept paper rolls of different diameters and different core sizes.
- They incorporate braking systems to optimize consumption
- Exterior sight glass for paper level
- Lock with special key for protection against vandalism

# TOILET PAPER DISPENSERS

paper roll Ø 230 mm



## PR2783

capacity: max. roll Ø230 mm

material: steel

finish: white epoxy



## PR2783B

capacity: max. roll Ø230 mm

material: steel

finish: matte black epoxy



## PR2783C

capacity: max. roll Ø230 mm

material: AISI 304 stainless steel

finish: bright



## PR2783CS

capacity: max. roll Ø230 mm

material: AISI 304 stainless steel

finish: satin

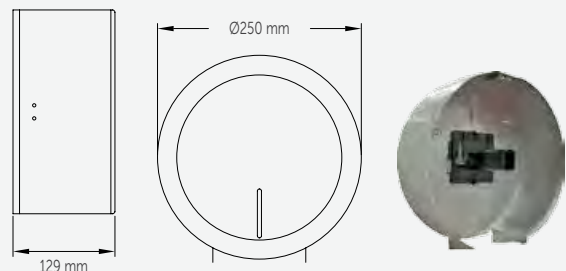


## PR2783 · PR2783B · PR2783C · PR2783CS COMPONENTS AND MATERIALS

- Stylish design suitable for every washroom
- One-piece body
- One-piece lid, which can be swung down for replenishment
- Backplate with multiple slots for easy installation
- Removable plastic shaft for standard Ø45 mm paper roll core with two different positions to allow different paper roll diameters (max. Ø230 mm)
- Shaft with inertial anti-spin retainer
- Slot at the front for viewing content level
- Backplate with an anti-moisture support
- Lock with standard Mediclinics key

## PR2783 · PR2783B · PR2783C · PR2783CS TECHNICAL SPECIFICATIONS

Thickness of body and lid	0.8 mm
Weight (empty)	1.25 Kg
Paper roll capacity	max. Ø230 mm
Toilet roll width	max. 115 mm
Toilet roll core	min. Ø45 mm
Recommended installation height	65 - 75 cm at lower point
Installation height	70 cm at the lowest point





# TOILET PAPER DISPENSERS

paper roll Ø 275 mm / 3 paper rolls



## PR2787

capacity: max. roll Ø275 mm

material: steel

finish: white epoxy



## PR2787B

capacity: max. roll Ø275 mm

material: steel

finish: matte black epoxy



## PR2787C

capacity: max. roll Ø275 mm

material: AISI 304 stainless steel

finish: bright

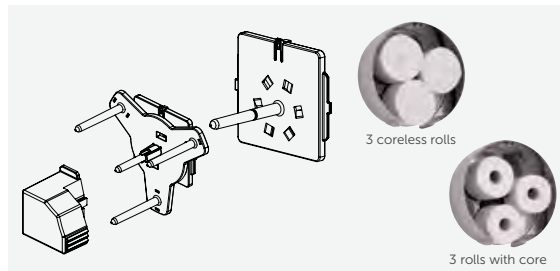


## PR2787CS

capacity: max. roll Ø275 mm

material: AISI 304 stainless steel

finish: satin



## KIT 2789

optional shaft for 3 rolls

material: thermoplastic

finish: black


optional accessory available separately

### PR2787 · PR2787B · PR2787C · PR2787CS COMPONENTS AND MATERIALS

- Stylish design suitable for every washroom
- One-piece body
- One-piece lid, which can be swung down for replenishment
- Backplate with multiple slots for easy installation
- Removable plastic shaft for standard Ø45 mm paper roll core with two different positions to allow different paper roll diameters (max. Ø275 mm)
- Shaft with inertial anti-spin retainer
- Slot at the front for viewing content level
- Backplate with anti-moisture support
- Lock with standard Mediclinics key

### PR2787 · PR2787B · PR2787C · PR2787CS TECHNICAL SPECIFICATIONS

Thickness of body and lid	0.8 mm
Weight (empty)	1.70 Kg
Paper roll capacity	max. Ø275 mm
Toilet roll width	max. 115 mm
Toilet roll core	min. Ø45 mm
Recommended installation height	65 - 75 cm at lower point
Installation height	70 cm at lower point



# TOILET PAPER DISPENSERS

3 paper rolls / paper roll Ø 275 mm



## PR0789

capacity: 3 rolls

material: **steel**  
finish: **white epoxy**



## PR0789C

capacity: 3 rolls

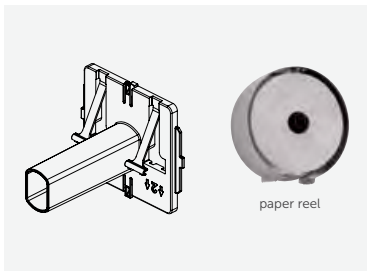
material: **AISI 304 stainless steel**  
finish: **bright**



## PR0789CS

capacity: 3 rolls

material: **AISI 304 stainless steel**  
finish: **satin**



## 93910055MD

optional shaft for 1 roll

material: **thermoplastic**  
finish: **black**

### PR0789 · PR0789C · PR0789CS · 93910055MD COMPONENTS AND MATERIALS

#### PR0789 · PR0789C · PR0789CS

- One-piece body
- One-piece lid, which can be swung down for replenishment
- Backplate with an anti-moisture support
- Modular thermoplastic shaft allows three standard rolls to be fitted, core or coreless rolls
- Slot at the front for viewing content level
- Lock with standard Mediclinics key



#### 93910055MD

- Optional thermoplastic shaft for industrial roll with inertial anti-spin retainer to optimise dispensing of toilet paper. Replaces the original three standard roll shaft, allowing the use of industrial toilet rolls.

### PR0789 · PR0789C · PR0789CS · 93910055MD TECHNICAL SPECIFICATIONS

#### PR0789 · PR0789C · PR0789CS

Thickness of body and lid	0.8 mm
Weight (empty)	1.75 Kg
Toilet roll width	max. 115 mm
Toilet paper roll capacity	3 u.
Toilet roll holder (optional shaft)	max. Ø275 mm
Toilet roll core	min. Ø45 mm
Recommended installation height	65 - 75 cm at lower point
Installation height	70 cm at lower point



3 coreless rolls



3 rolls with core

# TOILET PAPER DISPENSERS

3 units paper rolls / 2 units paper rolls



## PR0781

capacity: 3 rolls

material: steel

finish: white epoxy



## PR0781C

capacity: 3 rolls

material: AISI 304 stainless steel

finish: bright



## PR0781CS

capacity: 3 rolls

material: AISI 304 stainless steel

finish: satin



## PR0700CS

capacity: 2 rolls

material: AISI 304 stainless steel

finish: satin



## PR0781 · PR0781C · PR0781CS · PR0700CS COMPONENTS AND MATERIALS

### • PR0781 · PR0781C · PR0781CS

- One-piece body
- One-piece, weld-free lid
- Two slots in both sides that indicate the content level
- The toilet paper roll descends when the previous one has been finished by simply putting the hand through the side slot
- Lock with standard Mediclinics key

### • PR0700CS

- One-piece body
- Laser welded swung lid
- The roll descends automatically, once the previous one has been finished
- System for optimizing the issue of paper
- Anti-vandal key lock

## PR0781 · PR0781C · PR0781CS · PR0700CS TECHNICAL SPECIFICATIONS


### PR0781 · PR0781C · PR0781CS

Thickness of body and lid	0.8 mm
Weight (empty)	1.3 Kg
Toilet paper roll capacity	3 u.
Toilet paper roll	Ø105-125 mm
Recommended installation height	65 - 75 cm at lower point
Installation height	70 cm at lower point


### PR0700CS

Thickness of body and lid	0.8 mm
Weight (empty)	2 Kg
Toilet paper roll capacity	2 u.
Toilet paper roll	max. Ø135 mm
Recommended installation height	65-75 at lower point
Installation height	70 cm at lower point

### PR0781 / C / CS



### PR0700CS



# TOILET PAPER DISPENSERS

2 units paper rolls



## PR2784

capacity: 2 rolls

material: steel

finish: white epoxy



## PR2784B

capacity: 2 rolls

material: steel

finish: matte black epoxy



## PR2784C

capacity: 2 rolls

material: AISI 304 stainless steel

finish: bright



## PR2784CS

capacity: 2 rolls

material: AISI 304 stainless steel

finish: satin

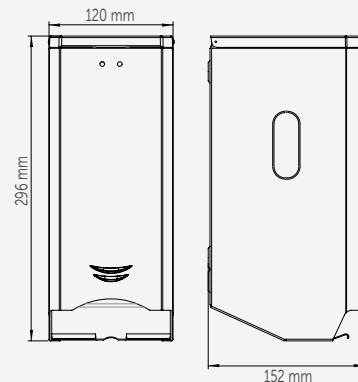


## PR2784 · PR2784B · PR2784C · PR2784CS COMPONENTS AND MATERIALS

- One-piece body
- One-piece, weld-free lid
- Two slots in both sides that indicate the content level
- Secondary paper roll bracket made in plastic allowing free movement of the roll in use. It can be set in two different positions, depending on the paper roll size
- The toilet paper roll descends when the previous one has been finished by simply putting the hand though the side slot
- Lock with standard Mediclinics key

## PR2784 · PR2784B · PR2784C · PR2784CS TECHNICAL SPECIFICATIONS

Thickness of body and lid	0.8 mm
Weight (empty)	1.1 Kg
Toilet paper roll capacity	2 u.
Toilet paper roll	max. Ø130 mm
Recommended installation height	65 - 75 cm at lower point
Installation height	70 cm at lower point



# TOILET PAPER DISPENSERS

*folded toilet tissue paper / seat covers*



## DTH100

capacity: 400 sheets (approx.)

material: steel

finish: white epoxy



## DTH100C

capacity: 400 sheets (approx.)

material: AISI 304 stainless steel

finish: bright



## DTH100CS

capacity: 400 sheets (approx.)

material: AISI 304 stainless steel

finish: satin



## DCA100CS

capacity: 250 seat covers

material: AISI 304 stainless steel

finish: satin



## DTH100 · DTH100C · DTH100CS · DCA100CS COMPONENTS AND MATERIALS

- One-piece body in AISI 304 stainless steel, with lid for refilling
- One-piece, weld-free lid
- Content viewer at the front
- Lock with standard Mediclinics key

### DCA100CS

- One-piece, weld-free body
- Opening at the top to replace cover sheets box
- Easy pull opening system

## DTH100 · DTH100C · DTH100CS · DCA100CS TECHNICAL SPECIFICATIONS

DTH100 · DTH100C · DTH100CS



DCA100CS

### DTH100 · DTH100C · DTH100CS

Body and lid thickness	0.8 mm
Towel capacity	400 (approx.)

### DCA100CS

Body and lid thickness	0.8 mm
Seat cover capacity	250



# TOILET PAPER DISPENSERS

## sanitary bag dispenser



### DBH100

capacity: 50 bags (approx)

material: steel

finish: white epoxy



### DBH100C

capacity: 50 bags (approx)

material: AISI 304 stainless steel

finish: bright



### DBH100CS

capacity: 50 bags (approx)

material: AISI 304 stainless steel

finish: satin



### AI0920C

sanitary bag dispenser

material: AISI 304 stainless steel

finish: bright

### AI0920CS

sanitary bag dispenser

material: AISI 304 stainless steel

finish: satin



## DBH100 · DBH100C · DBH100CS · AI0920C · AI0920CS COMPONENTS AND MATERIALS

### DBH100 · DBH100C · DBH100CS

- One-piece body in AISI 304 stainless steel

### AI0920C · AI0920CS

- Suitable for feminine sanitary bag refill boxes of 136 x 91 x 24 mm

## DBH100 · DBH100C · DBH100CS · AI0920C · AI0920CS TECHNICAL SPECIFICATIONS


### DBH100 · DBH100C · DBH100CS

Body thickness 0.8 mm


### AI0920C · AI0920CS

Body thickness 1 mm

### DBH100 · DBH100C · DBH100CS




### AI0920C · AI0920CS



# TOILET PAPER DISPENSERS

Table

	MODEL	MATERIAL / FINISH				PAPER TYPE			
		Steel white epoxy	Steel matte black epoxy	AISI 304 Stainless steel bright	AISI 304 Stainless steel Satin	STANDARD		ROLL (INDUSTRIAL)	
						CAPACITY		CAPACITY	
						2 rolls	3 rolls	Ø230 mm	Ø275 mm
	PR2783	•					•		
	PR2783B		•				•		
	PR2783C			•			•		
	PR2783CS				•		•		
	PR2787	•						•	
	PR2787B		•					•	
	PR2787C			•				•	
	PR2787CS				•			•	
	PR0789	•				•		•	
	PR0789C			•		•		•	
	PR0789CS				•	•		•	
	PR0700CS				•				
	PR0781	•				•			
	PR0781C			•		•			
	PR0781CS				•	•			
	PR2784	•				•			
	PR2784B		•			•			
	PR2784C			•		•			
	PR2784CS				•	•			
	DCA100CS							•	
	DTH100	•							
	DTH100C			•					
	DTH100CS				•				
	DBH100	•							
	DBH100C			•					
	DBH100CS				•				
	AI0920C			•					
	AI0920CS				•				

# TOILET PAPER DISPENSERS

Table

PAPER TYPE			SHAPE		LOCK WITH KEY	SUITABLE FOR					MODEL
Toilet seat cover	Sanitary towels	Sanitary Bags	Rectangular	Round		Gyms and Sport centers and similars	Hospitals and Health Centres facilities edery care homes and similars	Hotels and other accommo-dation	Offices, official or-ganizations, schools and similars	Airports, shopping malls and similars	
				●	●		●	●	●		PR2783
				●			●	●	●		PR2783B
				●	●	●	●	●	●		PR2783C
				●	●	●	●	●	●		PR2783CS
				●	●		●	●	●	●	PR2787
				●			●	●	●	●	PR2787B
				●	●	●	●	●	●	●	PR2787C
				●	●	●	●	●	●	●	PR2787CS
				●	●		●	●	●		PR0789
				●	●	●	●	●	●		PR0789C
				●	●	●	●	●	●		PR0789CS
			●		●	●	●	●	●		PR0700CS
			●		●		●	●	●		PR0781
			●		●	●	●	●	●		PR0781C
			●		●	●	●	●	●		PR0781CS
			●		●		●	●	●		PR2784
			●		●		●	●	●		PR2784B
			●		●	●	●	●	●		PR2784C
			●		●	●	●	●	●		PR2784CS
●			●			●	●	●	●	●	DCA100CS
	●		●		●		●	●	●		DTH100
	●		●		●	●	●	●	●		DTH100C
	●		●		●	●	●	●	●		DTH100CS
		●	●				●	●	●	●	DBH100
		●	●				●	●	●	●	DBH100C
		●	●				●	●	●	●	DBH100CS
		●	●					●	●	●	AI0920C
		●	●					●	●	●	AI0920CS





**PAPER TOWEL  
DISPENSERS**

*our goal is to win your trust*







## PAPER TOWEL DISPENSERS

*For all types of standard paper towel: C / Z or roll towel*

- Wide variety of functional paper towel dispensers that are easy to integrate into any toilet facility environment. Manufactured in various materials (steel, stainless steel, etc.) and in different finishes (white, black, bright, satin, etc.).
- For wall or recessed mounting.
- Exterior sight glass for paper level
- Lock with special key for protection against vandals
- Suitable for high traffic areas

# PAPER TOWEL DISPENSERS

towels with C/Z folds / wall mounted



## DT2106

capacity: 400-600 C/Z towels

material: steel

finish: white epoxy



## DT2106B

capacity: 400-600 C/Z towels

material: steel

finish: matte black epoxy



## DT2106C

capacity: 400-600 C/Z towels

material: AISI 304 stainless steel

finish: bright



## DT2106CS

capacity: 400-600 C/Z towels

material: AISI 304 stainless steel

finish: satin

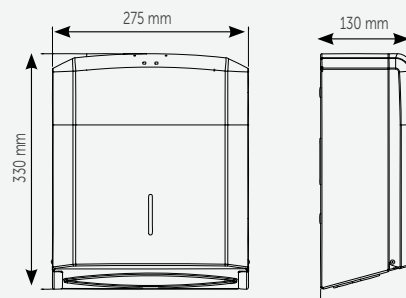


## DT2106 · DT2106B · DT2106C · DT2106CS COMPONENTS AND MATERIALS

- Fully welded structure
- The design of the paper outlet prevents the paper from tearing
- Door fixed to the body with two rivets, allowing it to be swung open for paper replacement
- Front lock with a special key provided for an easy paper replacement
- Content viewer on the front
- Back-plate with multiple slots for easy installation
- Lock with standard Mediclinics key

## DT2106 · DT2106B · DT2106C · DT2106CS TECHNICAL SPECIFICATIONS

Body and lid thickness	0.8 mm
Weight (empty)	1.8 Kg
Towels	max. 260 x 100 mm
Towels capacity folded in C/Z	400 - 600 u
Recommended installation height	130-160 cm at lower point
Installation height	85 - 120 cm at lower point



# PAPER TOWEL DISPENSERS

*roll / wall mounted*



## DT0303

capacity: max. roll Ø250 mm

material: **steel**  
finish: **white epoxy**



## DT0303C

capacity: max. roll Ø250 mm

material: **AISI 304 stainless steel**  
finish: **bright**



## DT0303CS

capacity: max. roll Ø250 mm

material: **AISI 304 stainless steel**  
finish: **satin**



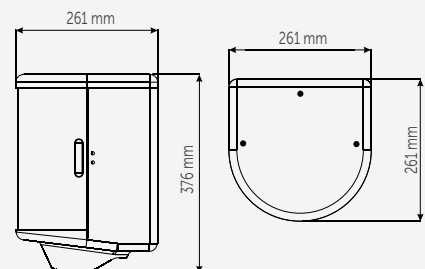
## DT0303 · DT0303C · DT0303CS COMPONENTS AND MATERIALS

- Drainage holes in the lower part to prevent eventual accumulation of water inside the dispenser
- Sliding access door with a recessed grip for opening and closing
- Thermoplastic body for roll of paper towels
- System for optimizing the issue of paper
- Front sliding door which allows it to be mounted under shelves and makes it easy to replenish the towels
- Jagged edge on dispenser to facilitate tearing of paper
- Lock with standard Mediclinics key
- Suitable for food handling establishments

## DT0303 · DT0303C · DT0303CS TECHNICAL SPECIFICATIONS

Body and lid thickness	0.8 mm
Weight (empty)	3.1 Kg
Paper reel	max. Ø250 mm
Height of paper roll	270 mm
Recommended installation height	130-160 cm at lower point
Installation height	85 - 120 cm at lower point


### DT0303 · DT0303C · DT0303CS



# PAPER TOWEL DISPENSERS

*recessed - wall mounted / roll*

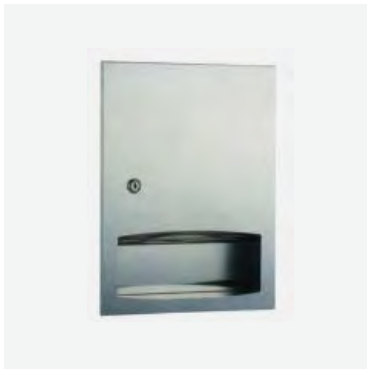MANUAL



## DTE0020CS

capacity: 200-400 C/Z towels

material: AISI 304 stainless steel  
finish: satin



MANUAL



## DTP025CS

capacity: roll paper Ø220 mm

material: AISI 304 stainless steel  
finish: satin



SEMI-AUTOMATIC



## DT0208ACS

capacity: roll paper Ø170 mm

material: AISI 304 stainless steel  
finish: satin



## DTE0020CS · DTP025CS · DT0208ACS COMPONENTS AND MATERIALS

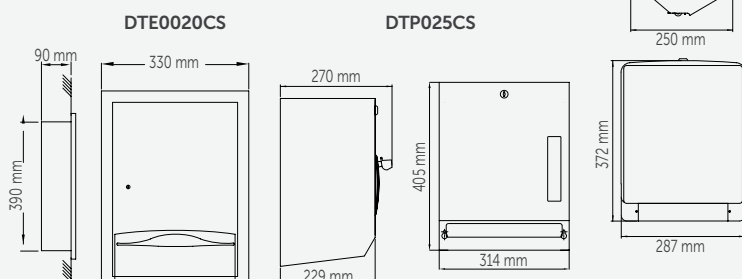
- **DTE0020CS**
  - Fully welded structure
  - One-piece frame
  - Towel tray with bound edging to dispense towels without tearing
  - Lock and special key supplied
- **DTP025CS**
  - Operated by means of a lever. According to the lever stroke, paper of 64, 102 or 127 mm
  - The design of the paper outlet prevents the paper from tearing
  - Automatic transfer mechanism shall dispense towels from stub roll before starting new roll
  - Door shall be attached to cabinet at side with a full length multi-staked stainless steel piano hinge
  - Front lock with a special key provided
- Installation label permanently affixed to the inside rear panel to illustrate correct paper loading, length preset pin selection and stub roll transfer
- **DT0208ACS**
  - Semi-automatic operation. The user pulls the paper, down tears it off and automatically a new service paper is dispensed
  - The cover shall be attached to the back with two pivots and shall be held closed with a tumbler key lock
  - Structural assembly of all components shall be of welded construction
  - An operation label shall be provided permanently affixed to the inside rear panel to illustrate the correct paper loading, length preset pin selection

## DTE0020CS · DTP025CS · DTP0208ACS TECHNICAL SPECIFICATIONS

DTE0020CS	
Body and lid thickness	0.8 mm
Weight (empty)	4.2 Kg
Capacity of folded towels in C/Z	200 - 400 units
Recommended installation height	115-145 cm at lower point
Installation height	70 - 105 cm at lower point






DTP025CS	
Body and lid thickness	0.8 mm
Weight (empty)	4.5 Kg
Main paper roll diameter	max. Ø220 mm
Secondary paper roll diameter	max. Ø100 mm
Dispensed paper towel width	from 200 to 230 mm
Recommended installation height	115-145 cm at lower point
Installation height	70-105 cm at lower point

DT0208ACS	
Body and lid thickness	0.8 mm
Paper roll diameter	max. Ø170 mm
Dispensed paper towel width	205 mm
Recommended installation height	130-160 cm at lower point
Installation height	85 - 120 cm at lower point



# PAPER TOWEL DISPENSERS

Table


	MODEL	MATERIAL / FINISH				INSTALLATION	
		Steel White Epoxy	Steel Matte Black Epoxy	AISI 304 Stainless steel Bright	AISI 304 Stainless steel Satin	Wall Mounted	Recessed
	DT2106	●				●	
	DT2106B		●			●	
	DT2106C			●		●	
	DT2106CS				●	●	
	DT0303	●				●	
	DT0303C			●		●	
	DT0303CS				●	●	
  	DTE0020CS				●		●
	DTP025CS				●	●	
	DT0208ACS				●	●	

# PAPER TOWEL DISPENSERS

Table

PAPER TYPE/CAPACITY				LOCK WITH KEY	SUITABLE FOR					MODEL
C/Z folds		ROLL			Gyms Sports centres and similars	Hospitals and Health Centres fa- cilities edery care homes and similars	Hotels Other accommo- dation	Offices, official or- ganizations, schools and similars	Airports, shopping malls and smilars	
200-400 units	400-600 u	Ø 200 mm	Ø 250 mm							
	•			•		•	•	•	•	DT2106
				•		•	•	•	•	DT2106B
	•			•	•	•	•	•	•	DT2106C
	•			•	•	•	•	•	•	DT2106CS
			•	•		•				DT0303
			•	•	•	•				DT0303C
			•	•	•	•				DT0303CS
•				•	•	•	•	•		DTE0020CS
		•		•	•	•	•	•	•	DTP025CS
		•		•	•	•	•	•	•	DT0208AS





## WASTE RECEPTACLES AND BINS

*your space always  
clean and tidy*



Financial District of London, UK





## WASTE RECEPTACLES AND BINS

*Quality, design, versatility and very durable for the daily management of waste.*

- Wide range of waste bins and interior containers, manufactured in various materials (steel, stainless steel, etc.) and in different finishes (white, black, bright, satin, etc.), with a modern and versatile design that makes them very easy to integrate into any toilet facility environment.
- Perfect for placing in common areas, such as offices, halls, sports facilities, shops, airports, shopping centres, etc.
- Models for installation on legs and/or on the wall (wall mounted or recessed)
- Functional design for easy maintenance
- Universal units suitable for management of nearly all types of waste

# WASTE RECEPTACLES AND BINS

*bins / with self-closing lid*



PP0080

## PP0080

capacity: 80 L

## PP0065

capacity: 65 L

material: **steel**  
finish: **white epoxy**



PP0080C

## PP0080C

capacity: 80 L

## PP0065C

capacity: 65 L

material: **AISI 304 stainless steel**  
finish: **bright**



PP0080CS

## PP0080CS

capacity: 80 L

## PP0065CS

capacity: 65 L

material: **AISI 304 stainless steel**  
finish: **satin**



## PP0080 · PP0065 · PP0080C · PP0065C · PP0080CS · PP0065CS COMPONENTS AND MATERIALS

- Manually activated self-closing lid
- Spring for automatic return and two rubber silencers
- Retaining system on the inside of the body to secure the disposable waste bag
- Four black thermoplastic feet to keep the bottom of the bin clear of any moisture
- Can be either free-standing or wall-mounted

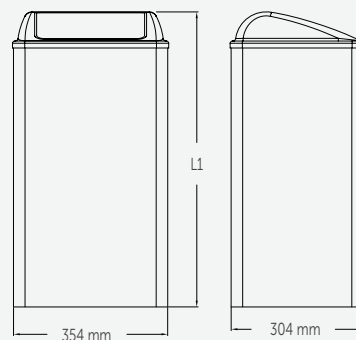
## PP0080 · PP0065 · PP0080C · PP0065C · PP0080CS · PP0065CS TECHNICAL SPECIFICATIONS

### PP0080 · PP0080C · PP0080CS

Capacity	80 L
L1	823 mm
Body thickness	1 mm
Thickness of top	1.2 mm
Lid thickness	1 mm
Weight (empty)	9.8 Kg

### PP0065 · PP0065C · PP0065CS

Capacity	65 L
L1	673 mm
Body thickness	1 mm
Thickness of top	1.2 mm
Lid thickness	1 mm
Weight (empty)	8.4 Kg



# WASTE RECEPTACLES AND BINS

*bins / open*



PP1080

## PP1080

capacity: 80 L

## PP1065

capacity: 65 L

material: **steel**  
finish: **white epoxy**



PP1065C

## PP1080C

capacity: 80 L

## PP1065C

capacity: 65 L

material: **AISI 304 stainless steel**  
finish: **bright**



PP1080CS

## PP1080CS

capacity: 80 L

## PP1065CS

capacity: 65 L

material: **AISI 304 stainless steel**  
finish: **satin**



## PP1080 · PP1065 · PP1080C · PP1065C · PP1080CS · PP1065CS COMPONENTS AND MATERIALS

- Retaining system on the inside of the body to secure the disposable waste bag
- Four black thermoplastic feet to keep the bottom of the bin clear of any moisture
- Can be either free-standing or wall-mounted

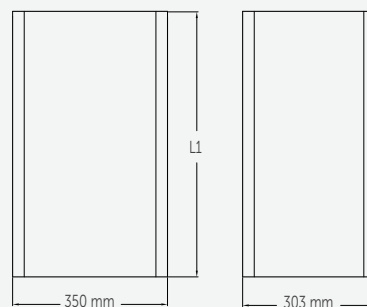
## PP1080 · PP1065 · PP1080C · PP1065C · PP1080CS · PP1065CS TECHNICAL SPECIFICATIONS

### PP1080 · PP1080C · PP1080CS

Capacity	80 L
L1	755 mm
Body thickness	1 mm
Weight (empty)	8.4 Kg

### PP1065 · PP1065C · PP1065CS

Capacity	65 L
L1	605 mm
Body thickness	1 mm
Weight (empty)	7 Kg



# WASTE RECEPTACLES AND BINS

*bins / open*



**PPA2279**  
capacity: 25 L

material: **steel**  
finish: **white epoxy**



**PPA2279B**  
capacity: 25 L

material: **steel**  
finish: **matte black epoxy**



**PPA2279C**  
capacity: 25 L

material: **AISI 304 stainless steel**  
finish: **bright**




**PPA2279CS**  
capacity: 25 L

material: **AISI 304 stainless steel**  
finish: **satin**




## PPA2279 · PPA2279B · PPA2279C · PPA2279CS COMPONENTS AND MATERIALS

- Can be either free-standing or wall-mounted
- Back-plate with 4 slot holes for wall mounting
- With inner swing plastic ring in black PP, to secure the disposable waste bag



## PPA2279 · PPA2279B · PPA2279C · PPA2279CS TECHNICAL SPECIFICATIONS

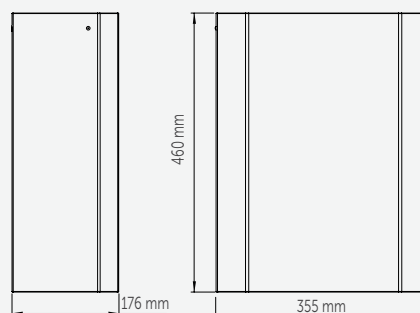Capacity	25 L
Body thickness	0.8 mm
Weight (empty)	3.7 Kg



# WASTE RECEPTACLES AND BINS

*bins / sanitary napkin containers  
wall mounted with lid*



## PPE0010CS

capacity: 14,2 L

material: AISI 304 stainless steel  
finish: satin



## PP0006\*

capacity: 6 L

material: steel  
finish: white epoxy



## PP0006C\*

capacity: 6 L

material: AISI 304 stainless steel  
finish: bright



## PP0006CS\*

capacity: 6 L

material: AISI 304 stainless steel  
finish: satin



\*These models are available with bag-holder

## PPE0010CS · PP0006 · PP0006C · PP0006CS COMPONENTS AND MATERIALS

### PPE0010CS

- With a self-closing cover and key to remove the waste bin
- Inner thermoplastic bin

### PP0006 · PP0006C · PP0006CS

- Free-standing or wall-mounted by two screws on the back
- The lid protrudes 3,5 mm from the body to facilitate opening. Fixed to the body by two shafts that articulate the lid

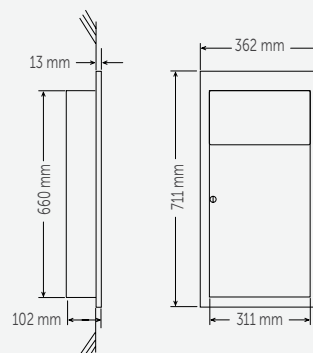
## PPE0010CS · PP0006 · PP0006S · PP0006S · PP0006CS TECHNICAL SPECIFICATIONS

### PPE0010CS


Capacity	14,2 L
Body and lid thickness	0.8 mm

### PP0006 · PP0006C · PP0006CS

Capacity	6 L
Body and lid thickness	0.8 mm
Weight (empty)	3.7 Kg



### PP0006 · PP0006C · PP0006CS



# WASTE RECEPTACLES AND BINS

*pedal-operated bins / circular*



**PP1321**  
capacity: 20 L



**PP1312**  
capacity: 12 L



**PP1305**  
capacity: 5 L



**PP1303**  
capacity: 3 L



material: **steel**  
finish: **white epoxy**



**PP1321C**  
capacity: 20 L



**PP1312C**  
capacity: 12 L



**PP1305C**  
capacity: 5 L



**PP1303C**  
capacity: 3 L



material: **AISI 430 steel**  
finish: **bright**



**PP1321CS**  
capacity: 20 L



**PP1312CS**  
capacity: 12 L



**PP1305CS**  
capacity: 5 L



**PP1303CS**  
capacity: 3 L



material: **AISI 430 steel**  
finish: **satin**

## PP1321/C/CS · PP1312/C/CS · PP1305/C/CS · PP1303/C/CS COMPONENTS AND MATERIALS

- Circular body
- Quiet and odour-preventing lid
- Inner polypropylene bin with metal handle
- Handle in the upper part to facilitate the transport of the receptacle
- Black thermoplastic non-slip pedal
- Black plastic non-slip base which keeps the bottom of the receptacle moisture-free

## PP1321/C/CS · PP1312/C/CS · PP1305/C/CS · PP1303/C/CS TECHNICAL SPECIFICATIONS

### PP1321 · PP1321C · PP1321CS

Capacity	20 L
Weight	5.2 Kg
L1	600 mm
LØ	250 mm

### PP1305 · PP1305C · PP1305CS

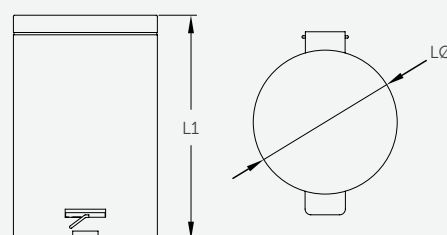
Capacity	5 L
Weight	1.1 Kg
L1	325 mm
LØ	210 mm

### PP1312 · PP1312C · PP1312CS

Capacity	12 L
Weight	3.4 Kg
L1	390 mm
LØ	250 mm

### PP1303 · PP1303C · PP1303CS




Capacity	3 L
Weight	0.9 Kg
L1	260 mm
LØ	170 mm







# WASTE RECEPTACLES AND BINS

*bins / table*

MODEL	SURFACE AREA		MATERIAL / FINISH				CAPACITY				SUITABLE FOR				
	Self-closing lid	Open	Steel white epoxy	Steel matte black epoxy	304 Stainless steel bright	304 Stainless steel satin	80 L	65 L	25 L	14,2 L	Offices, official organizations, schools and similars	Hospitals and Health Centres facilities, elderly care homes and similars	Airports, shopping malls and similars	Gyms and Sport centres and similar	Hotels and other accommodation
	PP0080	●	●				●				●	●	●		
	PP0080C	●				●	●				●	●	●	●	
	PP0080CS	●					●				●	●	●	●	
	PP0065	●		●				●			●	●	●		●
	PP0065C	●				●		●			●	●	●	●	●
	PP0065CS	●					●	●			●	●	●	●	●
	PPA2279		●	●					●		●	●	●		●
	PPA2279B		●		●				●		●	●	●		●
	PPA2279C		●			●			●		●	●	●	●	●
	PPA2279CS		●				●		●		●	●	●	●	●
	PP1080		●				●				●	●	●		
	PP1080C		●			●	●				●	●	●	●	
	PP1080CS		●				●				●	●	●	●	
	PP1065		●	●				●			●	●	●		●
	PP1065C		●			●		●			●	●	●	●	●
	PP1065CS		●				●	●			●	●	●	●	●
	PPE0010CS	●					●			●	●	●			●

# WASTE RECEPTACLES AND BINS

*other receptacles / table*

MODEL	LID OPENING		MATERIAL / FINISH						CAPACITY					SUITABLE FOR				MODEL		
	By pedal	Manual	Steel epoxy white	AISI 304 stainless steel bright	AISI 304 stainless steel satin	AISI 430 steel epoxy white	AISI 430 steel bright	AISI 430 steel satin	20 L	12 L	6 L	5 L	3 L	Offices, official organizations, schools and similars	Hospitals and Health Centres facilities, edery care homes and similars	Airports, shopping malls and similars	Gyms and Sport centres and similar		Hotels and other accomodation	
	PP0006	●	●							●				●	●	●		●	PP0006	
	PP0006C		●	●						●				●	●	●	●		●	PP0006C
	PP0006CS		●		●					●				●	●	●	●		●	PP0006CS
	PP1303	●					●						●	●	●			●	PP1303	
	PP1303C	●					●						●	●	●	●		●	PP1303C	
	PP1303CS	●						●					●	●	●	●		●	PP1303CS	
	PP1305	●					●				●			●	●			●	PP1305	
	PP1305C	●					●				●			●	●	●		●	PP1305C	
	PP1305CS	●						●			●			●	●	●		●	PP1305CS	
	PP1312	●					●		●					●	●	●		●	PP1312	
	PP1312C	●					●		●					●	●	●	●	●	PP1312C	
	PP1312CS	●						●	●					●	●	●	●	●	PP1312CS	
	PP13121	●					●		●					●	●	●		●	PP13121	
	PP13121C	●					●		●					●	●	●	●	●	PP13121C	
	PP13121CS	●						●	●					●	●	●	●	●	PP13121CS	

20

**MULTI-PURPOSE  
CABINETS**

*combined for better  
organization*





## MULTI-PURPOSE CABINETS AND COUNTERS

*Multiple solutions for collectivity bathrooms in the minimum space.*

- Elegantly and robustly designed multi-use cabinets, manufactured in AISI 304 stainless steel that combine paper towel dispensers, waste bins and high performance hand dryers.
- Perfect for installation in high traffic areas such as airports, shopping centres, gymnasiums, etc.
- They have a hand drying function (Saniflow®), depending on the model
- Front loading paper towel dispensers for C/Z folded paper.
- Removable waste bins to facilitate emptying
- Equipped with a vandal proof security lock

# MULTI-PURPOSE CABINETS AND COUNTERS

*paper towel dispenser + saniflow + waste bin*



## DTES0040CS

paper towel disp. capacity: **300-500 C/Z towels**  
bin capacity: **35,5 L**

## KT0040CS

optional frame for wall mounting

material: **AISI 304 stainless steel**

finish: **satin**



## DTES0040CS · KT0040CS COMPONENTS AND MATERIALS

### DTES0040CS

- Fully welded structure
- Two hinged doors with front locks with a special key provided for an easy paper replacement and bin emptying
- Paper towel dispenser with a tray with bound edging to prevent the paper towel from tearing

- Suitable for C-and Z- fold paper towels
- Saniflow automatic hand dryer
- Inner container in AISI 304 stainless steel can be removed to empty the contents
- Equipped with 2 anti-vandal keyed locks

### KT0040CS

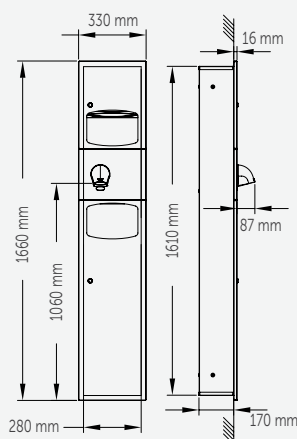
- Optional frame for wall mounting the model DTES0040CS

## DTES0040CS · KT0040CS TECHNICAL SPECIFICATIONS


### DTES0040CS

Body and door thickness	1.0 mm
Thickness of inner container and paper tray	0.8 mm
Weight (empty)	21.85 Kg
Towels folded in C/Z	330 - 500 u
Towels	max. 100 x 260 mm
Voltage	220 - 240 V
Frequency	50 / 60 Hz
Electrical Isolation	Class I
Consumption	10 A
Effective airflow	253 m <sup>3</sup> /h 4,248 l/min
Air velocity	100 Km/h
Drying time	29 sec
Total power	2,250 W
Motor power	250 W
Heating element	2,000 W
r.p.m.	5,500
Air. temp (d=10 and room temp.=21°C)	50°C
Noise level (at 2 m)	68 dBA
Bin capacity	35.5 L
Recommended installation height	1700 - 1,800 mm at upper point
Installation height	1,600 mm at upper point

### DTES0040CS



### KT0040CS

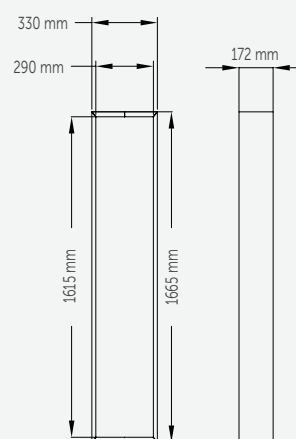

# MULTI-PURPOSE CABINETS AND COUNTERS

*paper towel dispenser + waste bin*



## DTE0030CS

paper towel disp. capacity: **400-600 C/Z towels**  
bin capacity: **7,6 L**

## KT0030CS

optional frame for wall mounting

material: **AISI 304 stainless steel**  
finish: **satin**



## DTE0050CS

paper towel disp. capacity: **600-800 C/Z towels**  
bin capacity: **17,2 L**

material: **AISI 304 stainless steel**  
finish: **satin**



## DTE0030CS · KT0030CS · DTE0050CS COMPONENTS AND MATERIALS

### DTE0030CS

- Paper towel dispenser with a tray with bound edging to prevent the paper towel from tearing
- Suitable for C and Z fold paper towels
- Inner anti-dripping container, made in thermoplastic, can be removed
- Fully welded structure
- Hinged door with safety stop and front lock with a special key provided for an easy paper replacement and bin emptying

### KT0030CS

- Frame for wall mounting

### DTE0050CS

- Fully welded structure
- Two hinged doors with front locks with a special key provided for an easy paper replacement and bin emptying
- Paper towel dispenser with a tray bound edging to prevent the paper towel from tearing
- Suitable for C-and Z- fold paper towels
- Inner container in AISI 304 stainless steel can be removed to empty the contents
- Equipped with 2 anti-vandal keyed locks

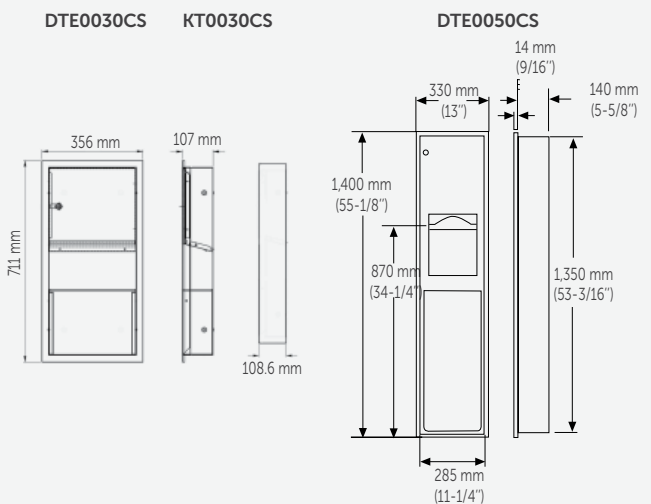
## DTE0030CS · KT0030CS · DTE0050CS TECHNICAL SPECIFICATIONS

### DTE0030CS

Body thickness	0.8 mm
Weight (empty)	9.7 Kg
Bin capacity	7.6 L
Towel folded capacity	400 towels
Towel multi capacity	600 towels
Recommended installation height	1,700 - 1,800 mm at higher point
Installation height	1,545 mm at higher point




### DTE0050CS

Body and door thickness	1.2 mm
Thickness of inner container and paper tray	0.8 mm
Weight (empty)	14.1 Kg
Towel folded in C/Z	600 - 800 towels
Towels	max. 100 x 260 mm
Bin capacity	17.2 L
Recommended installation height	1,700 - 1,800 mm at higher point
Installation height	1,545 mm at higher point




# MULTI-PURPOSE CABINETS AND COUNTERS

Table


	MODEL	MATERIAL / FINISH		UNIT COMPONENTS										RECESSED	SOAP DISPENSER CAPACITY		PAPER TOWEL DISPENSER CAPACITY			WASTE BIN CAPACITY			LOCK WITH SECURITY KEY	ADA UNE		
		AISI 304 stainless steel / satin	Polyester resine/ white	Dualflow Plus dryer	Machflow dryer	Speedflow dryer	Saniflow Dryer	Recessed soap dispenser	Automatic surface soap dispenser	Dispenser of C/Z fold paper towels	Waste Bin	Vertical	1 L		0.5 L	600-800 C/Z	300-500 C/Z	400-600 C/Z	35.5L	17.2L	7.5L					
	DTE0040CS	●					●										●						●	●		
	KT0040CS	●	●	●					●					●												
	DTE0030CS	●																						●	●	●
	KT0030CS	●																								
	DTE0050CS	●																●						●	●	●





**BATHROOM  
ACCESSORIES**

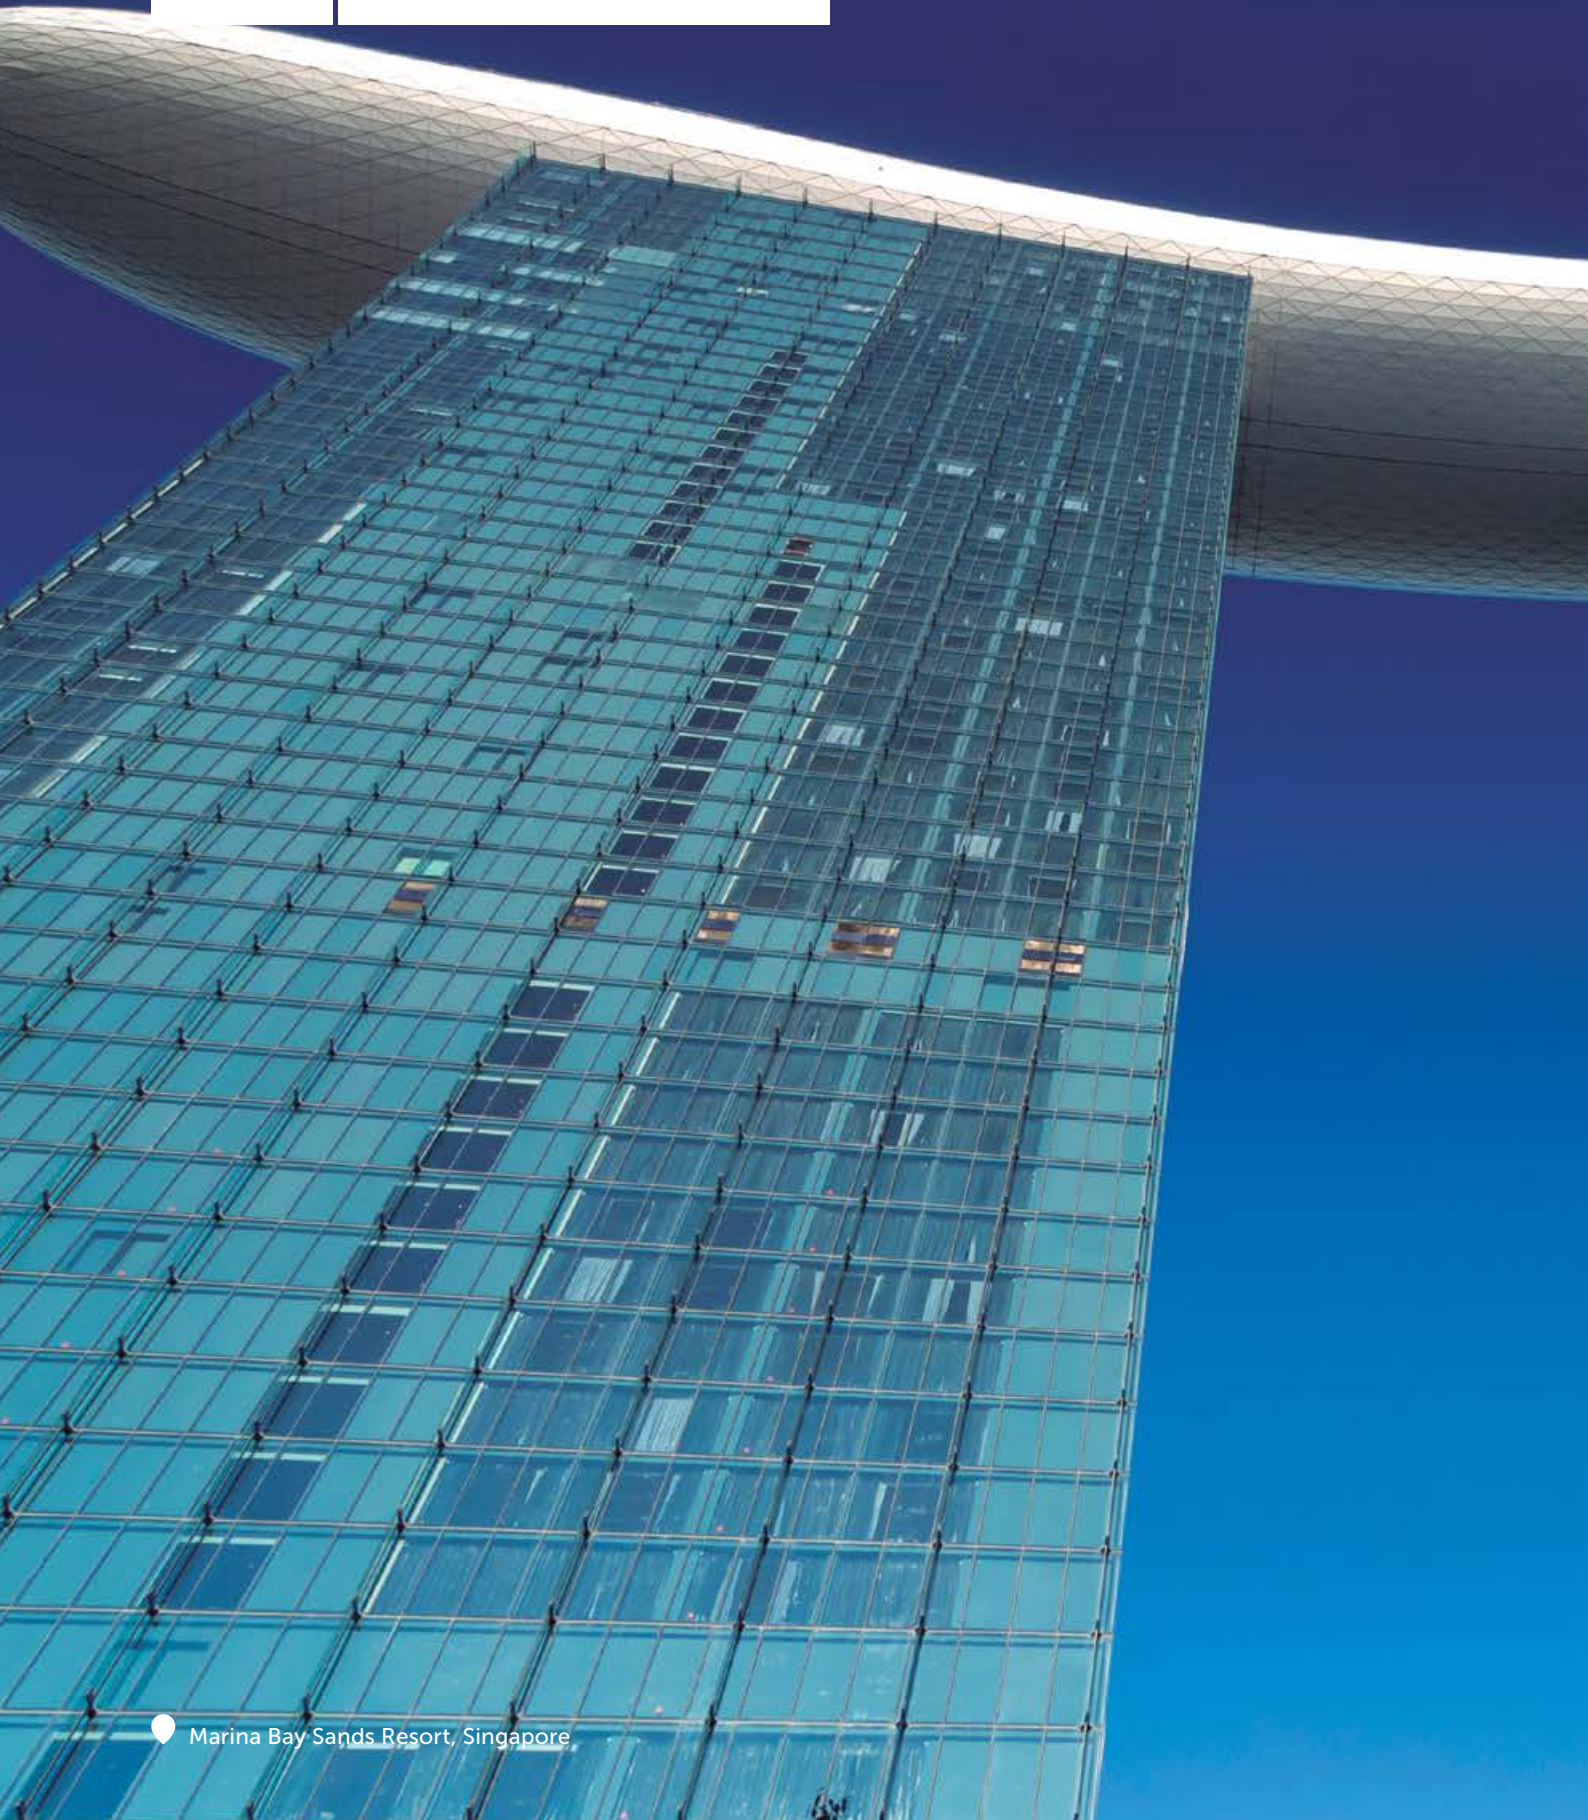*we've thought of every detail*







## BATHROOM ACCESSORIES

*Washroom accessories that improve the functionality of the facility, extend its features, increase comfort and, at the same time, enhance its attractiveness.*

- Wide selection of towel holders, shelves, soap dispensers, roll holders, brushes, robe hooks, paper towel dispensers, etc., manufactured in various materials (stainless steel, chromed brass, etc.) and in different finishes (satin, bright, etc.), with the toilet quality seal.
- 3 different toilet accessory lines (**MEDINOX**, **MEDISTEEL** and **MEDICROM**) that stamp their differentiating character on each toilet facility, at the same time, they increase the practicality of this space.
- Highly versatile and functional toilet accessory lines, designed to be adapted to any space and need
- Elegant and quality solutions, whose finishes provide convenience and comfort.

# BATHROOM ACCESSORIES

*medinox series*



## AI0040C

towel shelf with bar

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0040CS

towel shelf with rail

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0030C

double towel rail

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0030CS

double towel rail

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0020C

towel rail

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0020CS

towel rail

material: **AISI 304 stainless steel**  
finish: **satin**



### AI0040C · AI0040CS · AI0030C · AI0030CS · AI0020C · AI0020CS COMPONENTS AND MATERIALS

- Hidden wall brackets

#### AI0040C · AI0040CS


- Shelf of six cylindrical tubes

#### AI0040C / CS · AI0030C / CS · AI0020C / CS


- Cylindrical tube bars

### AI0040C · AI0040CS · AI0030C · AI0030CS · AI0020C · AI0020CS TECHNICAL SPECIFICATIONS


AI0040C · AI0040CS



AI0030C · AI0030CS

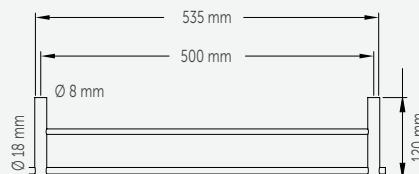

AI0020C · AI0020CS



# BATHROOM ACCESSORIES

*medinox series*



## AI0090C

towel ring

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0090CS

towel ring

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0110C

towel ring

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0110CS

towel ring

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0060C

shelf

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0060CS

towel ring

material: **AISI 304 stainless steel**  
finish: **satin**



### AI0090C · AI0090CS · AI0110C · AI0110CS · AI0060C · AI0060CS COMPONENTS AND MATERIALS

- Hidden wall brackets

AI0090C · AI0090CS · AI0110C · AI0110CS

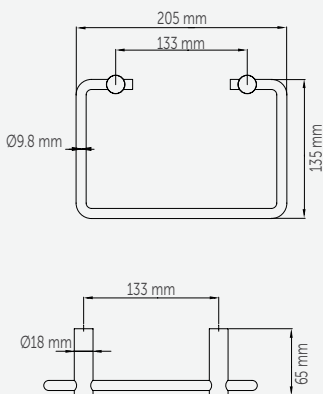
- Cylindrical tube bar

AI0060C · AI0060CS


- Cylindrical tube bars
- One-piece tray, 0,8 mm thick and with rounded edges

### AI0090C · AI0090CS · AI0110C · AI0110CS · AI0060C · AI0060CS TECHNICAL SPECIFICATIONS


AI0090C · AI0090CS



AI0110C · AI0110CS

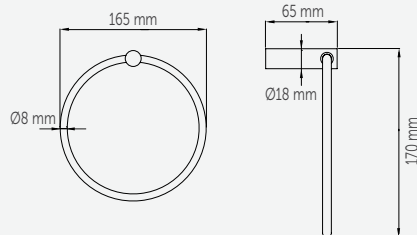

AI0060C · AI0060CS

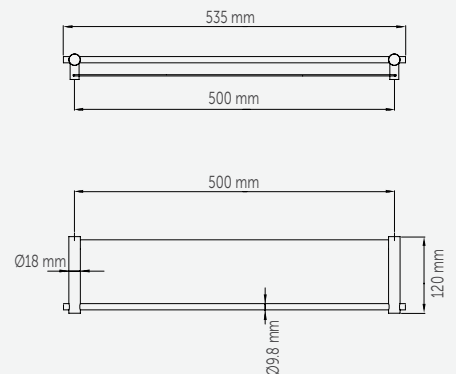

# BATHROOM ACCESSORIES

*medinox series*



## AI0140C

soap dish

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0140CS

soap dish

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0160C

soap dish

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0160CS

soap dish

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0050C

soap dish

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0050CS

soap dish

material: **AISI 304 stainless steel**  
finish: **satin**



### AI0140C · AI0140CS · AI0160C · AI0160CS · AI0050C · AI0050CS COMPONENTS AND MATERIALS

- Hidden wall brackets

AI0140C · AI0140CS · AI0160C · AI0160CS

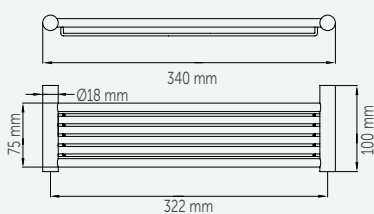
- Tray of five cylindrical rods

AI0050C · AI0050CS


- One-piece tray, 0,8 mm thick and with rounded edges
- Cylindrical tube bars

### AI0140C · AI0140CS · AI0160C · AI0160CS · AI0050C · AI0050CS TECHNICAL SPECIFICATIONS


AI0140C · AI0140CS



AI0160C · AI0160CS

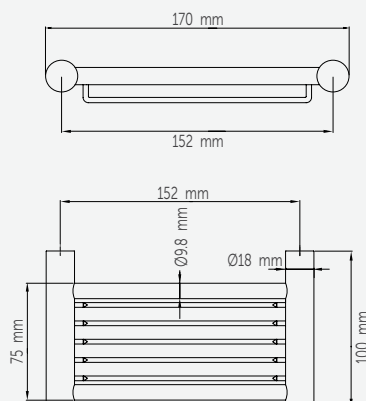

AI0050C · AI0050CS

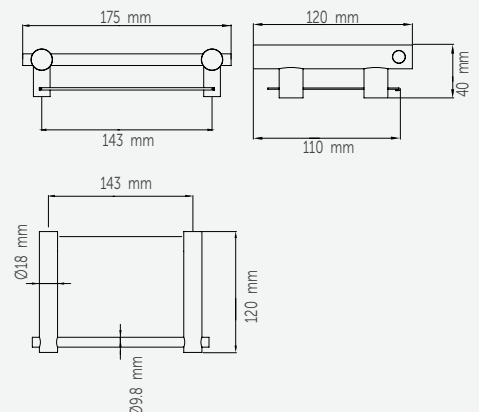

# BATHROOM ACCESSORIES

medinox series



## AI0080C

toilet roll holder with cover

material: **AISI 304 stainless steel**

finish: **bright**

## AI0080CS

toilet roll holder with cover

material: **AISI 304 stainless steel**

finish: **satin**



## AI0070C

toilet roll holder

material: **AISI 304 stainless steel**

finish: **bright**

## AI0070CS

toilet roll holder

material: **AISI 304 stainless steel**

finish: **satin**



## AI0100C

holder for spare toilet paper roll

material: **AISI 304 stainless steel**

finish: **bright**

## AI0100CS

holder for spare toilet paper roll

material: **AISI 304 stainless steel**

finish: **satin**



### AI0080C · AI0080CS · AI0070C · AI0070CS · AI0100C · AI0100CS COMPONENTS AND MATERIALS

- Hidden wall brackets

AI0080C / CS · AI0070C / CS · AI0100C / CS

- Cylindrical tube axis

AI0080C · AI0080CS

- One-piece cover, 0,8 mm with thick and with rounded edges

### AI0080C · AI0080CS · AI0070C · AI0070CS · AI0100C · AI0100CS TECHNICAL SPECIFICATIONS


Support thickness 0.8 mm

**AI0080C · AI0080CS**  
 Axis diameter 9.8 mm  
 Lid thickness 0.8 mm


**AI0070C · AI0070CS**  
 Axis diameter 0.8 mm

**AI0100C · AI0100CS**  
 Axis diameter 9.8 mm




AI0080C · AI0080CS



AI0070C · AI0070CS



AI0100C · AI0100CS



# BATHROOM ACCESSORIES

medinox series



## ES0965C

toilet brush holder

material: **AISI 304 stainless steel**  
finish: **bright**

## ES0965CS

toilet brush holder

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0010C

robe hook

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0010CS

robe hook

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0920C

sanitary bag dispenser

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0920CS

sanitary bag dispenser

material: **AISI 304 stainless steel**  
finish: **satin**



### ES0965C · ES0965CS · AI0010C · AI0010CS · AI0920C · AI0920CS COMPONENTS AND MATERIALS

#### ES0965C · ES0965CS

- Sisal fibre brush
- Assembling plate for mounting on the wall

#### AI0010C · AI0010CS

- Hidden wall bracket

#### AI0920C · AI0920CS

- Suitable for feminine sanitary bag refill boxes of 136 x 91 x 24 mm

### ES0965C · ES0965CS · AI0010C · AI0010CS · AI0920C · AI0920CS TECHNICAL SPECIFICATIONS

#### ES0965C · ES0965CS

Body thickness	1 mm
Handle and lid thickness	1 mm
Rod thickness	0.8 mm

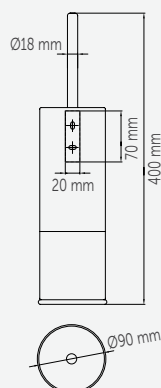
#### AI0010C · AI0010CS

Support thickness	0.8 mm
-------------------	--------


#### AI0920C · AI0920CS

Body thickness	1 mm
----------------	------


#### ES0965C · ES0965CS



#### AI0010C · AI0010CS



#### AI0920C · AI0920CS





# BATHROOM ACCESSORIES

*medisteel series*



## AI0710C

towel shelf with bar

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0710CS

towel shelf with bar

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0184C

towel rail

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0184CS

towel rail

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0115C

towel ring

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0115CS

towel ring

material: **AISI 304 stainless steel**  
finish: **satin**



### AI0710C · AI0710CS · AI0184C · AI0184CS · AI0115C · AI0115CS COMPONENTS AND MATERIALS

#### AI0710C / CS · AI0184C / CS · AI0115C / CS

- Support with trim

#### AI0710C · AI0710CS

- Shelf made up of 4 cylindrical tubes
- Cylindrical tube hanger

#### AI0184C · AI0184CS

- Cylindrical tube rail

#### AI0115C · AI0115CS

- Cylindrical tube hanger

### AI0710C · AI0710CS · AI0184C · AI0184CS · AI0115C · AI0115CS TECHNICAL SPECIFICATIONS


Support thickness	0.8 mm
Plate thickness	1.6 mm

<b>AI0710C · AI0710CS</b>	
Shelf tube thickness	0.8 mm


<b>AI0184C · AI0184CS</b>	
Bar diameter	Ø 19 mm

<b>AI0115C · AI0115CS</b>	
Hanger diameter	Ø 6 mm


AI0710C · AI0710CS



AI0184C · AI0184CS



AI0115C · AI0115CS



# BATHROOM ACCESSORIES

*medisteel series*



## AI0720C

shelf

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0720CS

shelf

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0118C

soap dish

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0118CS

soap dish

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0985C

facial tissue dispenser

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0985CS

facial tissue dispenser

material: **AISI 304 stainless steel**  
finish: **satin**



### AI0720C · AI0720CS · AI0118C · AI0118CS · AI0985C · AI0985CS COMPONENTS AND MATERIALS

#### AI0720C · AI0720CS

- Single piece shelf with rounded corners
- Support with trim

#### AI0118C · AI0118CS

- Tray with 2 channels for holding the soap bar and 2 drainage holes

#### AI0985C · AI0985CS

- Hidden lock for refilling

### AI0720C · AI0720CS · AI0118C · AI0118CS · AI0985C · AI0985CS TECHNICAL SPECIFICATIONS

#### AI0720C · AI0720CS

Shelf thickness	0.8 mm
Support thickness	0.8 mm
Plate thickness	1.6 mm


#### AI0118CS · AI0118CS

Tray thickness	0.8 mm
Support thickness	0.8 mm
Plate thickness	1.6 mm


#### AI0985C · AI0985CS

Body and plate thickness	0.8 mm
--------------------------	--------


#### AI0720C · AI0720CS



#### AI0118C · AI0118CS



#### AI0985C · AI0985CS



# BATHROOM ACCESSORIES

*medisteel series*



## AI0310C

toilet roll holder with cover  
material: **AISI 304 stainless steel**  
finish: **bright**

## AI0310CS

toilet roll holder with cover  
material: **AISI 304 stainless steel**  
finish: **satin**

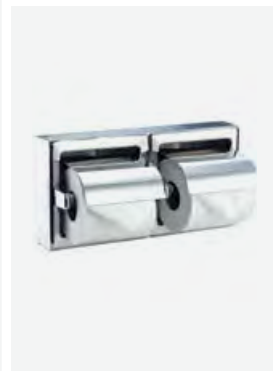


## AIE310C

toilet roll holder with cover, recessed  
material: **AISI 304 stainless steel**  
finish: **bright**

## AIE310CS

toilet roll holder with cover, recessed  
material: **AISI 304 stainless steel**  
finish: **satin**



## AI0320C

double toilet roll holder with cover  
material: **AISI 304 stainless steel**  
finish: **bright**

## AI0320CS

double toilet roll holder with cover  
material: **AISI 304 stainless steel**  
finish: **satin**



## AIE320C

double toilet roll holder with cover,  
recessed  
material: **AISI 304 stainless steel**  
finish: **bright**

## AIE320CS

double toilet roll holder with  
cover, recessed  
material: **AISI 304 stainless steel**  
finish: **satin**




**AI0310C · AI0310CS · AIE310C · AIE310CS · AI0320C · AI0320CS · AIE320C · AIE320CS**  
COMPONENTS AND MATERIALS

- Single piece body
- High strength chromed plastic axis
- Chromed zamak supports


**AI0310C · AI0310CS · AIE310C · AIE310CS · AI0320C · AI0320CS · AIE320C · AIE320CS**  
TECHNICAL SPECIFICATIONS

Body thickness 0.8 mm  
Cover thickness 1.2 mm


AI0310C · AI0310CS




AIE310C · AIE310CS



AI0320C · AI0320CS



AIE320C · AIE320CS



# BATHROOM ACCESSORIES

medisteel series



## AI0129C

toilet roll holder with cover

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0129CS

toilet roll holder with cover

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0113C

toilet roll holder

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0113CS

toilet roll holder

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0968C

toilet spare roll holder

material: **AISI 304 stainless steel**  
finish: **bright**

## AI0968CS

toilet spare roll holder

material: **AISI 304 stainless steel**  
finish: **satin**



**AI0129C · AI0129CS · AI0113C · AI0113CS · AI0968C · AI0968CS** COMPONENTS AND MATERIALS

### AI0129C · AI0129CS

- Single piece body
- White plastic axis

### AI0113C · AI0113CS

- Support with trim
- Chromed plastic spindle

### AI0968C · AI0968CS


- Tube axis with trim
- Chromed plastic stop

**AI0129C · AI0129CS · AI0113C · AI0113CS · AI0968C · AI0968CS** TECHNICAL SPECIFICATIONS

#### AI0129C · AI0129CS


Body thickness	1.2 mm
Cover thickness	0.8 mm

#### AI0129C · AI0129CS



#### AI0113C · AI0113CS


Support thickness	0.8 mm
Plate thickness	1.6 mm



#### AI0968C · AI0968CS

Spindle thickness	1.2 mm
Spindle diameter	Ø 25 mm
Flange	Ø 0.66 mm

#### AI0968C · AI0968CS



# BATHROOM ACCESSORIES

*medisteel series*



## AI0036C

double, robe hook

material: **AISI 304 stainless steel**

finish: **bright**

## AI0036CS

double, robe hook

material: **AISI 304 stainless steel**

finish: **satin**



## AI0033C

robe hook

material: **AISI 304 stainless steel**

finish: **bright**

## AI0033CS

hanger robe hook

material: **AISI 304 stainless steel**

finish: **satin**



## ES0968C

toilet brush holder

material: **AISI 304 stainless steel**

finish: **bright**

## ES0968CS

toilet brush holder

material: **AISI 304 stainless steel**

finish: **satin**



## AI0036C · AI0036CS · AI0033C · AI0033CS · ES0968C · ES0968CS COMPONENTS AND MATERIALS

### AI0036C · AI0036CS · AI0033C · AI0033CS

- Support with trim

### ES0968C · ES0968CS

- Sisal fibre brush
- Assembling plate for mounting on the wall

## AI0036C · AI0036CS · AI0033C · AI0033CS · ES0968C · ES0968CS TECHNICAL SPECIFICATIONS

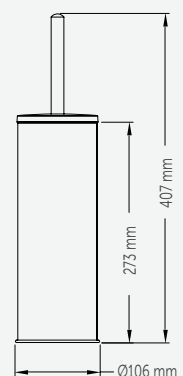
### AI0036C · AI0036CS · AI0033C · AI0033CS

Cap thickness	3.6 mm
Support thickness	0.8 mm
Plate thickness	1.6 mm


### ES0968C · ES0968CS

Body thickness	0.4 mm
Handle and lid thickness	0.4 mm
Rod thickness	0.8 mm


### ES0968C · ES0968CS



### AI0036C · AI0036CS

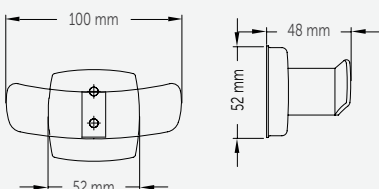

### AI0033C · AI0033CS



# BATHROOM ACCESSORIES

*medisteel series*



**AI0170C**  
magnifying mirror

material: **AISI 304 stainless steel**  
finish: **bright**



**AI0910C**  
retractable clothes line

material: **AISI 304 stainless steel**  
finish: **bright**



**PP0104CS**  
ashtray

material: **AISI 304 stainless steel**  
finish: **satin**



**PP0162C**  
ashtray

material: **AISI 304 stainless steel**  
finish: **bright**

**PP0162CS**  
ashtray

material: **AISI 304 stainless steel**  
finish: **satin**



## AI0170C · AI0910C · PP0104CS · PP0162C · PP0162CS COMPONENTS AND MATERIALS

### AI070C

- Guide for height adjustment
- Reversible mirror, normal and 3x magnification
- Extendable double arm, up to 410 mm

### AI0910C

- Holding support
- Fixed to the wall by means of two screws

### PP0162C · PP0162CS

- Pivoting container that allows emptying without removing the frame, and fixed to the body by means of a hinge

### PP0104CS

- Extractable container for emptying

## AI0170C · AI0910C · PP0104CS · PP0162C · PP0162CS TECHNICAL SPECIFICATIONS

### AI0910C





Body and stop thickness	0.6 mm
Plate thickness	0.9 mm
Cord extension	210 cm max.

### PP0140CS

Body thickness	1.2 mm
Container thickness	0.8 mm
Cover thickness	1.2 mm

### PP0162C · PP0162CS

Body and container thickness	0.8 mm
------------------------------	--------



# BATHROOM ACCESSORIES

*medicrom series*



## AC0959C

towel shelf with rail

material: **chrome-plated brass**  
finish: **bright**



## AC0973C

grab bar / towel roll of 655 mm

material: **chrome-plated brass**  
finish: **bright**



## AC0974C

grab bar / towel rail of 530 mm

material: **chrome-plated brass**  
finish: **bright**



## AC0950C

grab bar / towel of 305 mm

material: **chrome-plated brass**  
finish: **bright**



## AC0961C

towel rail

material: **chrome-plated brass**  
finish: **bright**



### AC0959C · AC0973C · AC0974C · AC0950C · AC0961C COMPONENTS AND MATERIALS

AC0959C · AC0973C · AC0974C · AC0950C · AC0961C

- Grab bar with snap flange cover

AC0959C

- Shell made of 4 cylindrical tubes

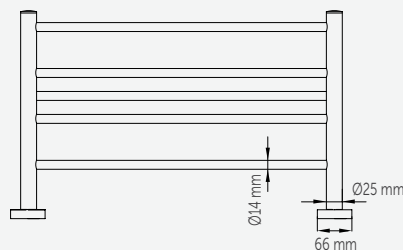

### AC0959C · AC0973C · AC0974C · AC0950C · AC0961C TECHNICAL SPECIFICATIONS

#### AC0959C


Shelf thickness	1 mm
Shelf	Ø14 mm

#### AC0973C · AC0974C · AC0950C · AC0961C

Tube thickness	1 mm
Tube diameter	Ø25 mm




#### AC0973C · AC0974C · AC09750C

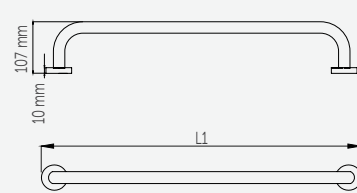

**L1:**  
AC0973C: 667 mm  
AC0974C: 537 mm  
AC0950C: 305 mm

#### AC0961C

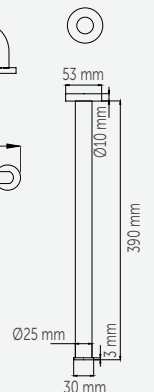

# BATHROOM ACCESSORIES

*medicrom series*



**AC0978C**   
towel ring Ø200 mm

material: **chrome-plated brass**  
finish: **bright**

**AC0979C**   
towel ring Ø170 mm

material: **AISI 304 stainless steel**  
finish: **bright**



**AC0956C**  
grab bar

material: **chrome-plated brass**  
finish: **bright**



**AC0957C**  
grab bar with soap dish

material: **chrome-plated brass**  
finish: **bright**



## AC0978C · AC0979C · AC0956C · AC0957C COMPONENTS AND MATERIALS

### AC0978C · AC0979C

- Support with snap flange cover

### AC0956C

- Grab bar with snap flange cover

### AC0957C

- Grab bar with snap flange cover
- Tray of cylindrical rods
- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

## AC0978C · AC0979C · AC0956C · AC0957C TECHNICAL SPECIFICATIONS


### AC0978C · AC0979C

Hook thickness 1 mm

### AC0956C · AC0957C

Tube thickness 1 mm


### AC0978C · AC0979C




L1:

AC0978C: Ø200 mm · AC0979C: Ø170 mm

### AC0956C



### AC0957C





# BATHROOM ACCESSORIES

*medicrom series*



**AC0962C**   
175 x 107 mm soap dish

material: **chrome-plated brass**  
finish: **bright**

**AC0963C**   
265 x 107 mm soap dish

material: **AISI 304 stainless steel**  
finish: **bright**



**AC0964C**  
triangular soap dish

material: **chrome-plated brass**  
finish: **bright**



**AC0780C**  
shelf

material: **chrome brass / glass**  
finish: **bright**



## AC0962C · AC0963C · AC0964C · AC0780C COMPONENTS AND MATERIALS

### AC0962C · AC0963C · AC0964C · AC0780C

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

### AC0962C · AC0963C

- Tray of cylindrical rods
- Support with snap flange cover

### AC0964C

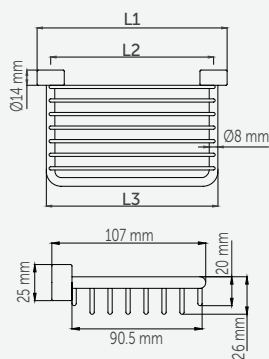
- Tray of cylindrical rods

### AC0780C

- Glass shelf
- Support with snap flange cover


## AC0962C · AC0963C · AC0964C · AC0780C TECHNICAL SPECIFICATIONS

AC0962C · AC0963C



L1: AC0962C: 175 mm · AC0963C: 265 mm  
L2: AC0962C: 150 mm · AC0963C: 240 mm  
L3: AC0962C: 158 mm · AC0963C: 248 mm

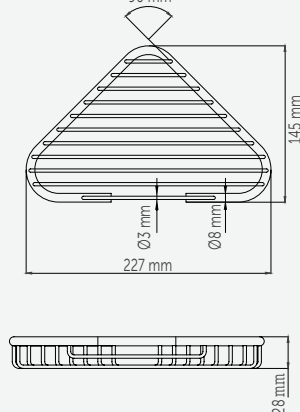AC0964C



AC0780C



# BATHROOM ACCESSORIES

*medicrom series*



**AC0967C**  
toilet roll holder with cover

material: **chrome-plated brass**  
finish: **bright**



**AC0970C**  
holder for spare toilet paper roll

material: **chrome-plated brass**  
finish: **bright**



## AC0967C · AC0970C COMPONENTS AND MATERIALS

### AC0967C

- One-piece cover
- White plastic axis

### AC0970C

- Support with snap flange cover

### AC0967C · AC0970C

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

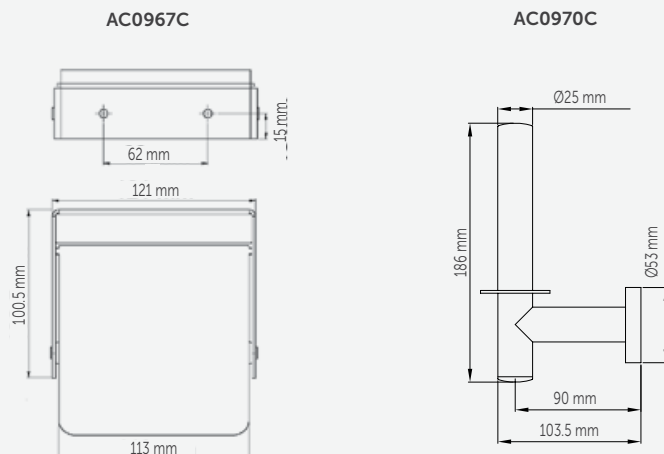
## AC0967C · AC0970C TECHNICAL SPECIFICATIONS

### AC0967C

Lid thickness	0.8 mm
Wall bracket thickness	2 mm

### AC0970C

Axis thickness	1 mm and Ø 53 mm
Snap flange cover	Ø 50 mm



# BATHROOM ACCESSORIES

*medicrom series*



## AC0966C

robe hook

material: **chrome-plated brass**  
finish: **bright**



## ES0010C

toilet brush holder

material: **chrome-plated brass**  
finish: **bright**



## AC0966C · ES0010C COMPONENTS AND MATERIALS

### AC0966C

- Support with snap flange cover

### ES0010C

- Sisal fibre brush
- Assembling plate for mounting on the wall

### AC0966C · ES0010C

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

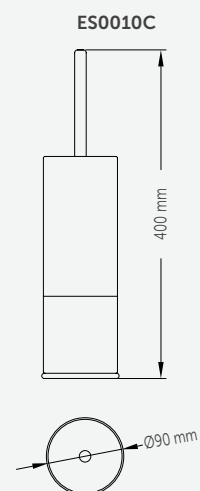
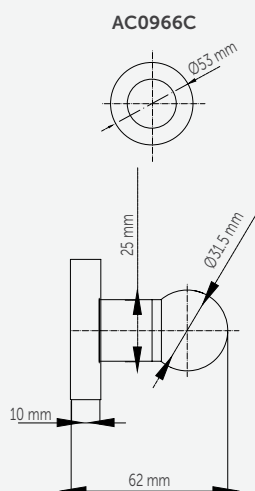
## AC0966C · ES0010C TECHNICAL SPECIFICATIONS

### AC0966C

Hook thickness	1 mm and Ø 25 mm
----------------	------------------

### ES0010C

Body thickness	1 mm
Handle and lid thickness	1 mm
Rod thickness	0.8 mm



# BATHROOM ACCESSORIES

*medicrom series*



**AC0083C**  
tissue dispenser

material: **chrome-plated brass**  
finish: **bright**



**AC0976C**  
tissue dispenser

material: **chrome-plated brass**  
finish: **bright**



## AC0083C · AC0976C COMPONENTS AND MATERIALS

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

### AC0083C

- Hidden lock for replenishment

### AC0976C

- No back cover (not suitable for mounting on the wall or on an horizontal surface)

## AC0083C · AC0976C TECHNICAL SPECIFICATIONS

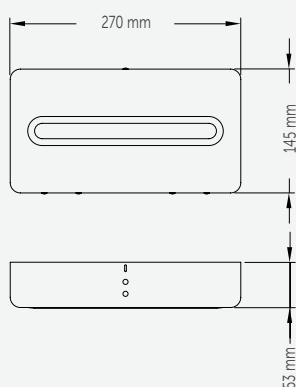
### AC0083C

Body thickness	0.8 mm
----------------	--------


### AC0976C


Body thickness	0.6 mm
----------------	--------

### AC0083C



### AC0976C

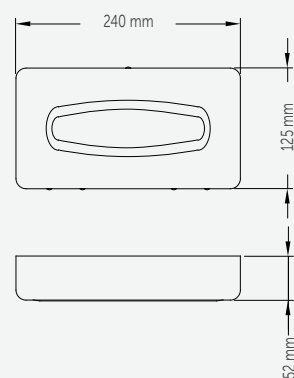



## GRAB BARS AND OTHER ACCESSORIES

*let us give you a hand  
with your daily tasks*





CELEBRATION  
OF FREEDOM

Stenitzky  
Elena Steiner  
700-01 000

OFFICES  
FOR RENT  
605.083.411



## **GRAB BARS AND OTHER ACCESORIES FOR A BARRIER-FREE WASHROOMS**

*Functional solutions that make the bathroom a completely safe and accessible place for everyone.*

- Using the bathroom independently is very important. For this reason, our wide range of grab bars and accessories for a barrier-free washroom, manufactured in various materials (stainless steel, steel, etc.) and in different finishes (satin, bright, white, etc.), provide a better quality of life to all those, without distinction, who in one way or another do not have full physical capability or sensory function.
- All our grab bars and shower seats have an ergonomic and functional design that assists in the functional limitations of those with a disability.
- Our product portfolio includes a wide range of grab bars, shower seats, mirrors, etc., conceived and designed to allow the bathroom to be used in complete safety and fully independently by those with mobility problems.

# GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



## BR0300CS

length: 387 mm

## BR0400CS

length: 537 mm

## BR0600CS

length: 692 mm

## BR0750CS

length: 842 mm

## BR0900CS


length: 997 mm

## BR1200CS

length: 1200 mm - straight

material: AISI 304 stainless steel

finish: satin \*



## BAI090CS

90° angle

## BAD090CS

90° angle

material: AISI 304 stainless steel

finish: satin\*



**\*ALSO AVAILABLE  
IN BRIGHT FINISH**

**BR0300CS · BR400CS · BR600CS · BR750CS · BR900CS · BR1200CS · BAI090CS · BAD090CS**  
COMPONENTS AND MATERIALS

- Snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls



- The strength of the bar support will depend on the type of wall and the supports used

**BR0300CS · BR400CS · BR600CS · BR750CS · BR900CS · BR1200CS · BAI090CS · BAD090CS**  
TECHNICAL SPECIFICATIONS

Bar	Ø32 mm
Tube thickness	1.5 mm
Snap flange cover	Ø82 mm

BR0300CS/400CS/600CS/750CS/900CS/1200CS BAI090CS · BAD090CS

**L1:**  
BR0300CS: 387 mm  
BR0400CS: 537 mm  
BR0600CS: 692 mm  
BR0750CS: 842 mm  
BR0900CS: 997 mm  
BR1200CS: 1200 mm





# GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



## BG0800CS

vertical swing

material: AISI 304 stainless steel

finish: satin\*

## BG0850CS

vertical swing

material: AISI 304 stainless steel

finish: satin\*



## BG0900CS

vertical swing with brake

material: AISI 304 stainless steel

finish: satin\*



## BGC710CS

vertical swing on fixed column

material: AISI 304 stainless steel

finish: satin



**\*ALSO AVAILABLE IN BRIGHT FINISH**

## BG0800CS · BG0850CS · BG0900CS · BGC710CS COMPONENTS AND MATERIALS

### BG0800CS · BG0850CS · BGC710CS

- Toilet roll holder hook
- Safety system that blocks the bar in a vertical position to prevent it dropping accidentally
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of surface and the supports used

- The rotating point is strengthened with a double tube for maximum resistance

### BG0800CS · BGC710CS

- The one-piece structure provides enhanced stability and prevents dirt from building up

### BG0900CS

- Three brake positions that avoid accidental collapse

## BG0800CS · BG0850CS · BG0900CS · BGC710CS TECHNICAL SPECIFICATIONS

### BG0800CS · BG0850CS · BGC0900CS

Bar	Ø32 mm
Tube thickness	1.5 mm
Base plate thickness	3 mm

### BG07100CS

Bar	Ø32 mm
Tube thickness	1.5 mm
Base plate thickness	5 mm


### L1:

BG0800CS: 738 mm


BG0850CS: 852 mm

BG0900CS: 738 mm

### BG0800CS · BG0850CS · BG0900CS



### BGC710CS

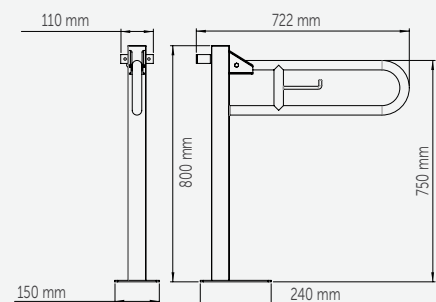

# GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



## BGA0820CS

vertical swing with floor support


material: AISI 304 stainless steel  
finish: satin\*



## BG0089CS

horizontal swing

material: AISI 304 stainless steel  
finish: satin\*



## BSI020CS

wall/floor mounted with 3 anchoring points

material: AISI 304 stainless steel  
finish: satin\*

## BSD020CS

wall/floor mounted with 3 anchoring points

material: AISI 304 stainless steel  
finish: satin\*



**\*ALSO AVAILABLE IN BRIGHT FINISH**

## BGA0820CS · BG0089CS · BSI020CS · BSD020CS COMPONENTS AND MATERIALS

- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of surface and the supports used

### BGA0820CS · BG0089CS

- Toilet roll holder hook
- Safety anchoring system that blocks the bar in a perpendicular position to the wall, preventing it from turning accidentally

### BGA0820CS

- Opening system that transfers the support to the floor on the bar downloads

### BSI020CS · BSD020CS


- Snap flange cover for hidden mounting

## BGA0820CS · BG0089CS · BSI020CS · BSD020CS TECHNICAL SPECIFICATIONS


### BGA0820CS

#### BGA0820CS


Bar	Ø32 mm
Bar thickness	1.2 mm
Base plate thickness	3 mm



### BG0089CS

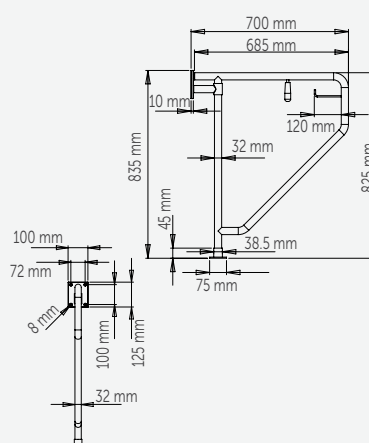

### BSI020CS · BSD020CS

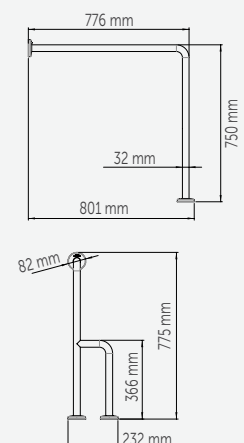

Bar	Ø32 mm
Bar thickness	1.5 mm
Snap flange cover	Ø82 mm

# GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



## BS0010CS

wall / floor mounted

material: AISI 304 stainless steel  
finish: satin\*



## BFI600CS

wall - mounted with 3 anchoring points

## BFD600CS

wall - mounted with 3 anchoring points

material: AISI 304 stainless steel  
finish: satin\*



**\*ALSO AVAILABLE IN BRIGHT FINISH**

## BS0010CS · BFI600CS · BFD600CS COMPONENTS AND MATERIALS

### BS0010CS · BFI600CS · BFD600CS

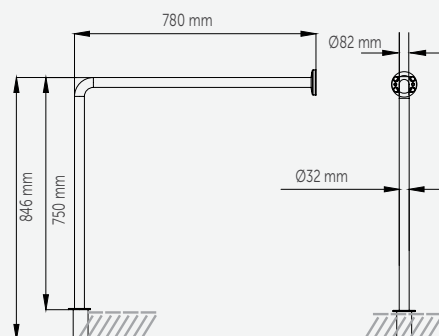
- Snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls

- The strength of the bar support will depend on the type of wall and the supports used


## BS0010CS · BFI600CS · BFD600CS TECHNICAL SPECIFICATIONS

Bar	Ø32 mm
Tube thickness	1.5 mm
Snap flange cover	Ø82 mm

BS0010CS



BFI600CS · BFD600CS

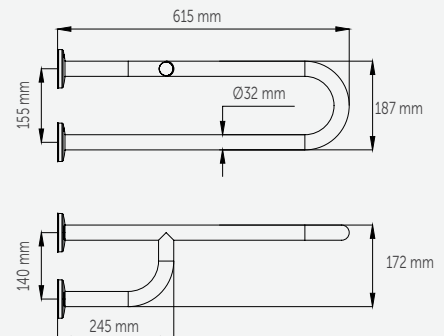

# GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars




## BD0700CS

angled on 2 walls with 3 anchoring points

material: AISI 304 stainless steel  
finish: satin\*



**\*ALSO AVAILABLE  
IN BRIGHT FINISH**



## BTI090CS

angled on 2 walls with 3 anchoring points

## BTD090CS

angled on 2 walls with 3 anchoring points

material: AISI 304 stainless steel  
finish: satin



## BA0130CS

130° angle

material: AISI 304 stainless steel  
finish: satin\*



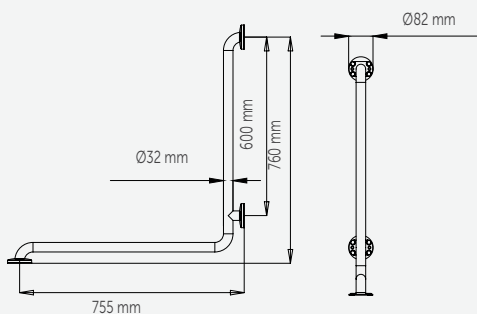
## BD0700CS · BTI090CS · BTD090CS · BA0130CS COMPONENTS AND MATERIALS

- Snap flange cover for hidden mounting
- One-piece structure that gives it enhanced stability and prevents dirt from building up
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used


## BD0700CS · BTI090CS · BTD090CS · BA0130CS TECHNICAL SPECIFICATIONS

Bar	Ø32 mm
Bar thickness	1.5 mm
Snap flange cover	Ø82 mm


BD0700CS



BTI090CS · BTD090CS

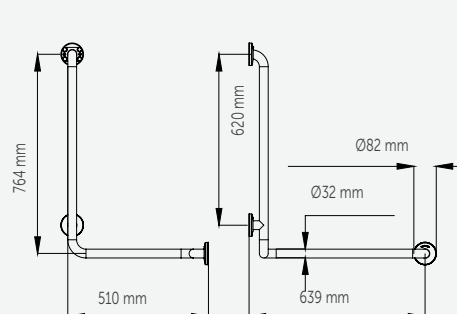

BA0130CS



# GRAB BARS AND OTHER ACCESSORIES

## mediepoxy steel bars



### BR0300

length: 390 mm

### BR0400

length: 540 mm

### BR0600

length: 695 mm

### BR0750


length: 845 mm

### BR0900

length: 1000 mm - straight

material: **steel**

finish: **white epoxy**



### BAI090

90° angle

### BAD090

90° angle

material: **steel**

finish: **white epoxy**



## BR0300 · BR0400 · BR0600 · BR0750 · BR0900 · BAI090 · BAD090 COMPONENTS AND MATERIALS

- Tube with anti-rust treatment
- Plastic snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used


## BR0300 · BR0400 · BR0600 · BR0750 · BR0900 · BAI090 · BAD090 TECHNICAL SPECIFICATIONS

Bar	Ø32 mm
Bar thickness	1.5 mm
Plastic snap flange cover	Ø85 mm


### L1:

BR0300:	390 mm
BR0400:	540 mm
BR0600:	695 mm
BR0750:	845 mm
BR0900:	1000 mm

### BR0300 · BR0400 · BR0600 · BR0750 · BR0900



### BAI090 · BAD090

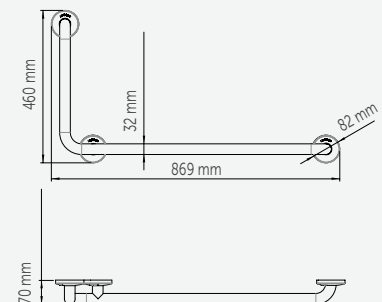

It is not recommended to install the mediepoxy line bars in places where it is in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points as a result of improper installation.

# GRAB BARS AND OTHER ACCESSORIES

## mediepoxy steel bars



**BG0800**  
vertical swing

**BG0850**  
vertical swing

material: **steel**  
finish: **white epoxy**



**BGC710**  
vertical swing

material: **steel**  
finish: **white epoxy**



**BGA0820**  
drop-down with support

material: **steel**  
finish: **white epoxy**



**BS0010**  
wall / floor mounted

material: **steel**  
finish: **white epoxy**



### BG0800 · BG0850 · BGC710 · BGA0820 · BS0010 COMPONENTS AND MATERIALS

- Tube with anti-rust treatment
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used

#### BG0800 · BG0850 · BGC710

- Toilet roll holder hook
- The rotating point is strengthened with a double tube for maximum resistance
- Safety system that blocks the bar in a vertical position to

prevent it dropping accidentally

#### BGA0820

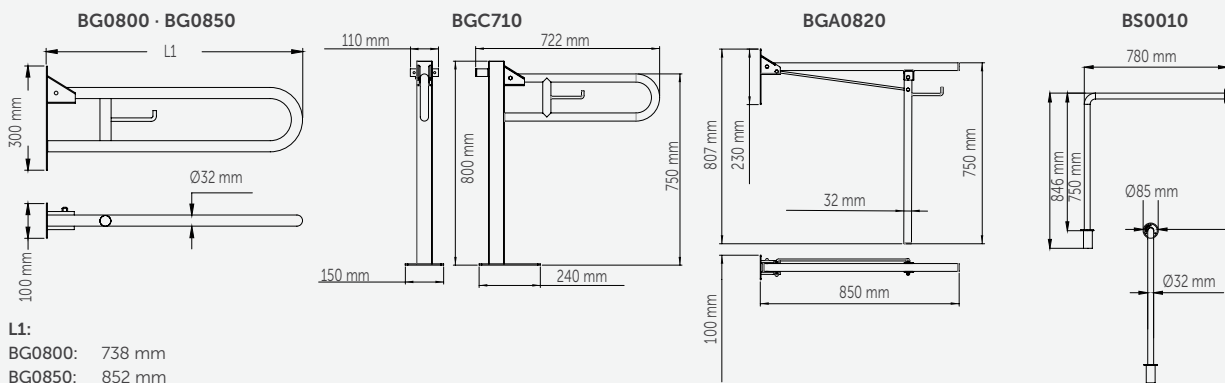
- Opening system that transfers the support to the floor on moving the bar downwards
- Safety system that blocks the bar in a vertical position to prevent it dropping accidentally

#### BS0010

- Built into the floor at 96 mm

### BG0800 · BG0850 · BGC710 · BGA0820 · BS0010 TECHNICAL SPECIFICATIONS

Bar	Ø32 mm	<b>BS0010</b>
Bar thickness	1.5 mm	Plastic snap flange cover Ø85 mm



It is not recommended to install the mediepoxy line bars in places where it is in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points as a result of improper installation.

# GRAB BARS AND OTHER ACCESSORIES

*mediepoxi AISI 304 stainless steel bars*



## BFI600

wall-mounted with 3 anchoring points

## BFD600

wall-mounted with 3 anchoring points

material: **steel**  
finish: **white epoxy**



## BD0700

angled on 2 walls with 3 anchoring points

material: **steel**  
finish: **white epoxy**



## BA0130

130° angle

material: **steel**  
finish: **white epoxy**



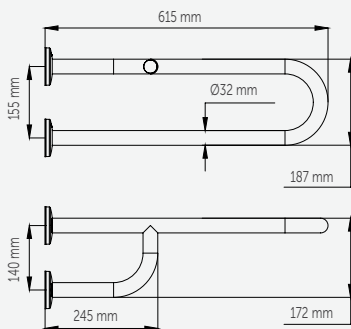
## BFI600 · BFD600 · BD0700 · BA0130 COMPONENTS AND MATERIALS

- Tube with anti-rust treatment
- Snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used


## BFI600 · BFD600 · BD0700 · BA0130 TECHNICAL SPECIFICATIONS

Bar	Ø32 mm
Bar thickness	1.5 mm
Plastic snap flange cover	Ø85 mm


BFI600 · BFD600



BD0700

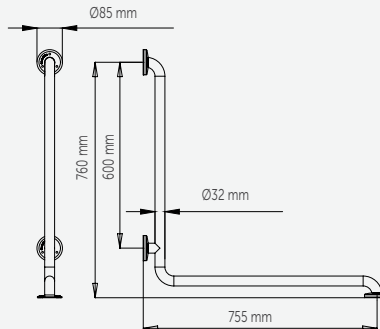

BA0130

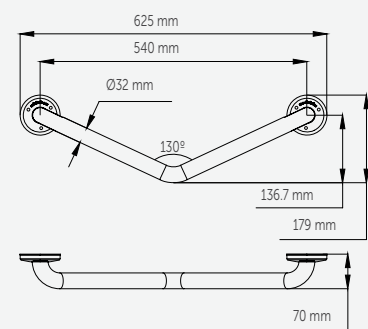










It is not recommended to install the mediepoxi line bars in places where it is in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points as a result of improper installation.

# GRAB BARS AND OTHER ACCESSORIES

table of grab bars



			MATERIAL / FINISH		ELECTRICALLY INSULATED	SNAP FLANGE COVER	NUTS AND BOLTS INCLUDED
			AISI 304 Stainless steel satin	Steel White epoxy			
<b>grab bars</b>							
	STRAIGHT	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•
	90° ANGLE	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•
	SWING VERTICAL	MEDINOX	•		•		•
		MEDIEPOXY		•	•		•
	SWING HORIZONTAL	MEDINOX	•		•		•
	WALL/FLOOR THREE ANCHORING POINTS	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•
	TO THE WALL RECESSED FLOOR	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•
	TO THE WALL THREE ANCHORING POINTS	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•
	ANGLE TWO WALLS (THREE ANCHORING POINTS)	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•
	130°/135° ANGLE	MEDINOX	•		•	•	•
		MEDIEPOXY		•	•	•	•



# GRAB BARS AND OTHER ACCESSORIES

## seats



### AM0100

folding seat with wall support

material: AISI 304 stainless steel / phenolic sheet  
finish: **satin / white ivory**



### AM0201C

folding seat

material: AISI 304 stainless steel  
finish: **bright**

### AM0201CS

folding seat

material: AISI 304 stainless steel  
finish: **satin**



## AM0100 · AM0201C · AM0201CS COMPONENTS AND MATERIALS

### AM0100

- Seat in non-porous delamination-proof phenolic sheet
- Deters fungi and bacteria
- Non-slip and warm to the touch
- Slots for water drainage

### AM0100 · AM0201C · AM0201CS

- The strength of the seat support will depend on the type of wall and the supports used

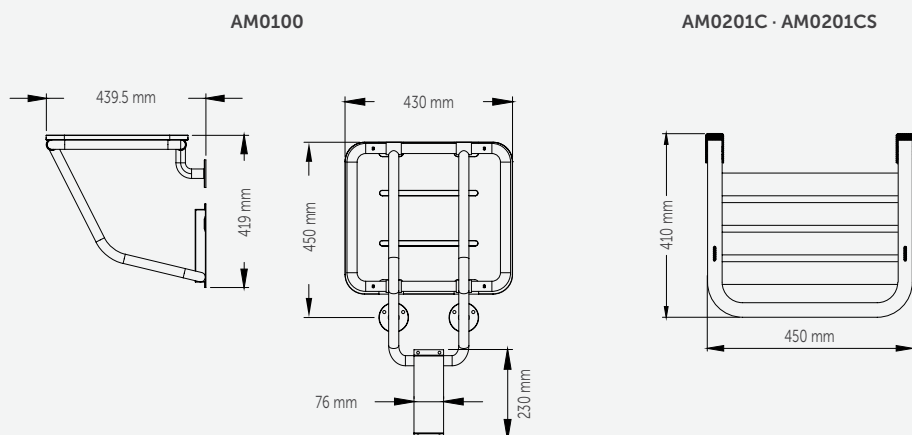
## AM0100 · AM0201C · AM0201CS TECHNICAL SPECIFICATIONS

### AM0100

Tube	Ø25 mm
Tube thickness	1.6 mm
Thickness of phenolic sheets	8 mm

### AM0201C · AM0201CS

Tube	Ø32 mm
Sheet thickness	1.7 mm



# GRAB BARS AND OTHER ACCESSORIES

## seats



**AM0251C**  
folding seat with floor support  
material: **AISI 304 stainless steel**  
finish: **bright**

**AM0251CS**  
folding seat with floor support  
material: **AISI 304 stainless steel**  
finish: **satin**



**AM0500**  
reversible, folding seat with floor support  
material: **AISI 304 stainless steel / phenolic sheet**  
finish: **satin / white ivory**



### AM0251C · AM0251CS · AM0500 COMPONENTS AND MATERIALS

#### AM0251C · AM0251CS

- Slots for water drainage
- Opening system that moves the support to the floor on swinging the seat down
- The bending process guarantees that the diameter is uniform on curves
- Recommended installation height of 470 mm at the top

#### AM0500

- Tube to prevent oxidation
- Vinyl-coated structure, biocompatible and non-allergenic

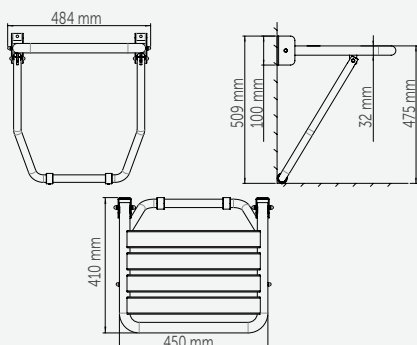
- The bending process guarantees that the diameter is uniform on curves
- Electrically isolated
- Stainless steel bolts for masonry walls
- Seat in non-porous delamination-proof phenolic sheet
- Deters fungi and bacteria
- Slots for water drainage
- The strenght of the seat support will depend on the type of wall and the supports used
- Reversible seat mounted left or right

### AM0251C · AM0251CS · AM0500 TECHNICAL SPECIFICATIONS

#### AM0251C · AM0251CS

Tube	Ø 32 mm
Sheet thickness	1.7 mm


#### AM0251C · AM0251CS



#### AM0500

Tube	Ø 25 mm
Tube thickness	1.6 mm
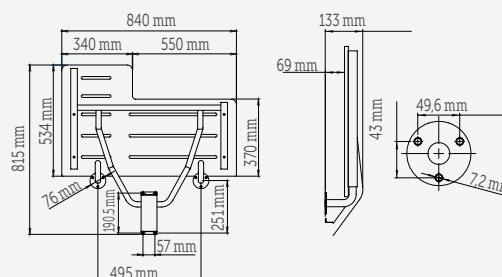
#### AM0500



# GRAB BARS AND OTHER ACCESSORIES

## *mirrors*



### **EP0350CS**

fixed mirror 700 x 500 mm

### **EP0450CS**

fixed mirror 800 x 600 mm

material: **AISI 304 stainless steel**

finish: **satin**



## **EP0350CS · EP0450CS** COMPONENTS AND MATERIALS

- One-piece frame made of AISI 304 stainless steel
- Backed with medium density fibre waterproof board that reinforces the glass, making it stronger
- 5 mm glass mirror

## **EP0350CS · EP0450CS** TECHNICAL SPECIFICATIONS

Frame thickness	1 mm
Glass thickness	5 mm

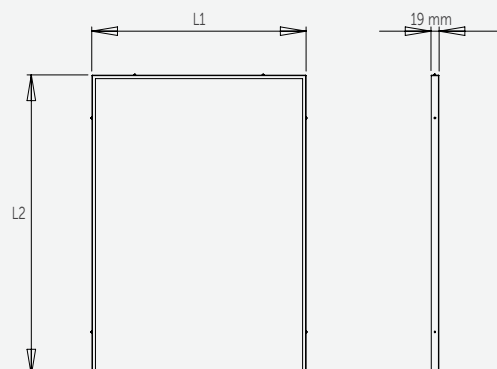
### **EP0350CS**

L1	500 mm
L2	700 mm

### **EP0450CS**

L1	600 mm
L2	800 mm

### **EP0350CS · EP0450CS**



# GRAB BARS AND OTHER ACCESSORIES

## *mirrors*



### **EP0300**

tilting mirror 700 x 500 mm

material: **steel**  
finish: **white epoxy**



### **EP0300CS**

tilting mirror 700 x 500 mm

### **EP0400CS**

pivoting mirror 800 x 600 mm

material: **AISI 304 stainless steel**  
finish: **satin**



## **EP0300 · EP0300CS · EP0400CS** COMPONENTS AND MATERIALS

- One-piece frame made of steel (EP0300) or stainless steel (EP0300CS · EP0400CS)
- Backed with medium density fibre waterproof board that reinforces the glass, making it stronger
- Pivoting system that allows to tilt the mirror
- Glass fitted with silicon on the frame
- 5 mm glass mirror

## **EP0300 · EP0300CS · EP0400CS** TECHNICAL SPECIFICATIONS

Frame thickness	1.5 mm
Glass thickness	5 mm

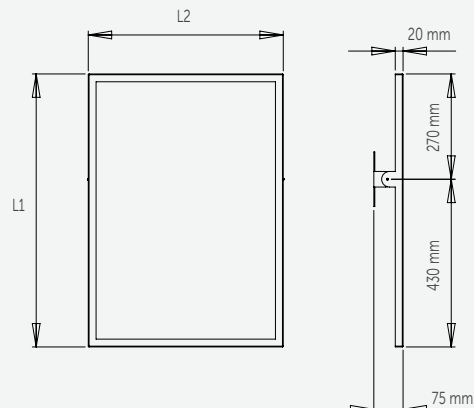
### **EP0300 · EP0300CS**


L1	700 mm
L2	500 mm

### **EP0400CS**

L1	800 mm
L2	600 mm

### **EP0300 · EP0300CS · EP0400CS**





10

**BABY CHANGING  
STATIONS**

*the world viewed  
through child's eyes*






## **SOLUTIONS FOR BABIES AND CHILDREN SAFETY**

*The world seen through the eyes of the youngest children takes on another dimension with the Mediclinics solutions in this safety line for babies.*

- Mediclinics' baby changing stations are manufactured under strict quality and safety standards and offer a wide range of safe, practical, functional and hygienic solutions for younger children.
- Vibrant and fun spaces to make the daily hygiene habits of babies a cheerful but also healthy time.



# BABY CHANGING STATIONS *horizontal*



## CP0016H

material: **polypropylene**  
finish: **white**



## CP0016HCS

material: **polypropylene / AISI 304 stainless steel**  
finish: **satın**



### CP0016H · CP0016HCS COMPONENTS AND MATERIALS

- Changing surface (bed) made of polypropylene with Biocote® antimicrobial additive embedded into its own surface, promoting an easy cleaning and inhibiting the growth of odor causing and staining microbes
- The open/close mechanism of the bed is always concealed to the user's view and it consists on a pair of reinforced hinges and a pneumatic cylinder, ensuring a high durability and a smooth open and close of the baby changing station
- One-piece easy-mounting chassis made of galvanized steel with the corresponding mounting hardware included, making very easy the installation of the unit to the wall
- 1,900 cm<sup>2</sup> contoured changing surface area with child protection straps made of nylon, providing a complete safety for the baby
- Bed with a pair of bag hooks (one at the right side and the other one at the left), helping to keep personal belongings close and at hand
- Liner dispenser with lock made of polypropylene, holds

approximately 80 bed liners, minimizing operator refills and discouraging potential vandalism

- The design and manufacture of this baby changing station is according to the latest version of the EN 12221-1 ("Child use and care articles. Changing units for domestic use. Safety requirements") and EN 12221-2 ("Child use and care articles. Changing units for domestic use. Test methods") standards, assuring that the baby changing station is totally safety
- The baby changing station has been designed to hold a total weight much higher than the minimum established by the EN 12221-1 and the EN 12221-2 standards.


#### CP0016HCS

- One-piece frontal chassis made in AISI 304 stainless steel, 0.8 mm thick, fixed to the bottom of the bed by means of 4 bolts and 4 nuts, always concealed to the user's view, without joints or edges for increasing the user safety, a better cleaning and an easy integration with other satin-finish accessories in the restroom

**Warning: To ensure that the unit supports the intended loads, baby changing station must be properly installed according to the Mediclinics' instructions.**

### CP0016H · CP0016HCS TECHNICAL SPECIFICATIONS

Dimensions	860 x 570 x 100 mm
Weight (empty)	12.3 Kg (CP0016H) / 16.0 Kg (CP0016HCS)
Liner dispenser capacity	80 u.
Recommended installation height	800 mm at lowest point
Recommended installation height	700 mm at lowest point





**CP0016V**

material: **polypropylene**  
finish: **white**



**CP0016VCS**

material: **polypropylene / AISI 304 stainless steel**  
finish: **satin**



## CP0016V · CP0016VS COMPONENTS AND MATERIALS

- Changing surface (bed) made of polypropylene with Biocote® antimicrobial additive embedded into its own surface, promoting an easy cleaning and inhibiting the growth of odor causing and staining microbes
- The open/close mechanism of the bed is always concealed to the user's view and it consists on a pair of reinforced hinges and a pneumatic cylinder, ensuring a high durability and a smooth open and close of the baby changing station
- One-piece easy-mounting chassis made of galvanized steel with the corresponding mounting hardware included, making very easy the installation of the unit to the wall
- 1,900 cm<sup>2</sup> contoured changing surface area with child protection straps made of nylon, providing a complete safety for the baby
- Bed with one bag hook (located in the front part of the bed), helping to keep personal belongings close and at hand
- Liner dispenser with lock made of polypropylene, holds approximately 80 bed liners, minimizing operator refills and discouraging potential vandalism
- The design and manufacture of this baby changing station is according to the latest version of the EN 12221-1 ("Child use and care articles. Changing units for domestic use. Safety requirements") and EN 12221-2 ("Child use and care articles. Changing units for domestic use. Test methods") standards, assuring that the baby changing station is totally safety
- The baby changing station has been designed to hold a total weight much higher than the minimum established by the EN 12221-1 and the EN 12221-2 standards


### CP0016VCS

- One-piece frontal chassis made in AISI 304 stainless steel, fixed to the bottom of the bed by means of 4 bolts and 4 nuts, always concealed to the user's view, without joints or edges for increasing the user safety, a better cleaning and an easy integration with other satin-finish accessories in the restroom

**Warning: To ensure that the unit supports the intended loads, baby changing station must be properly installed according to the Mediclinics' instructions.**

## CP0016V · CP0016VS TECHNICAL SPECIFICATIONS

Dimensions	875 x 553 x 100 mm
Weight (empty)	13.4 Kg (CP0016V) / 16.6 Kg (CP0016VCS)
Liner dispenser capacity	80 u.
Recommended installation height	800 mm at lowest point
Recommended installation height	700 mm at lowest point








## **STAINLESS STEEL SANITARY WARE**

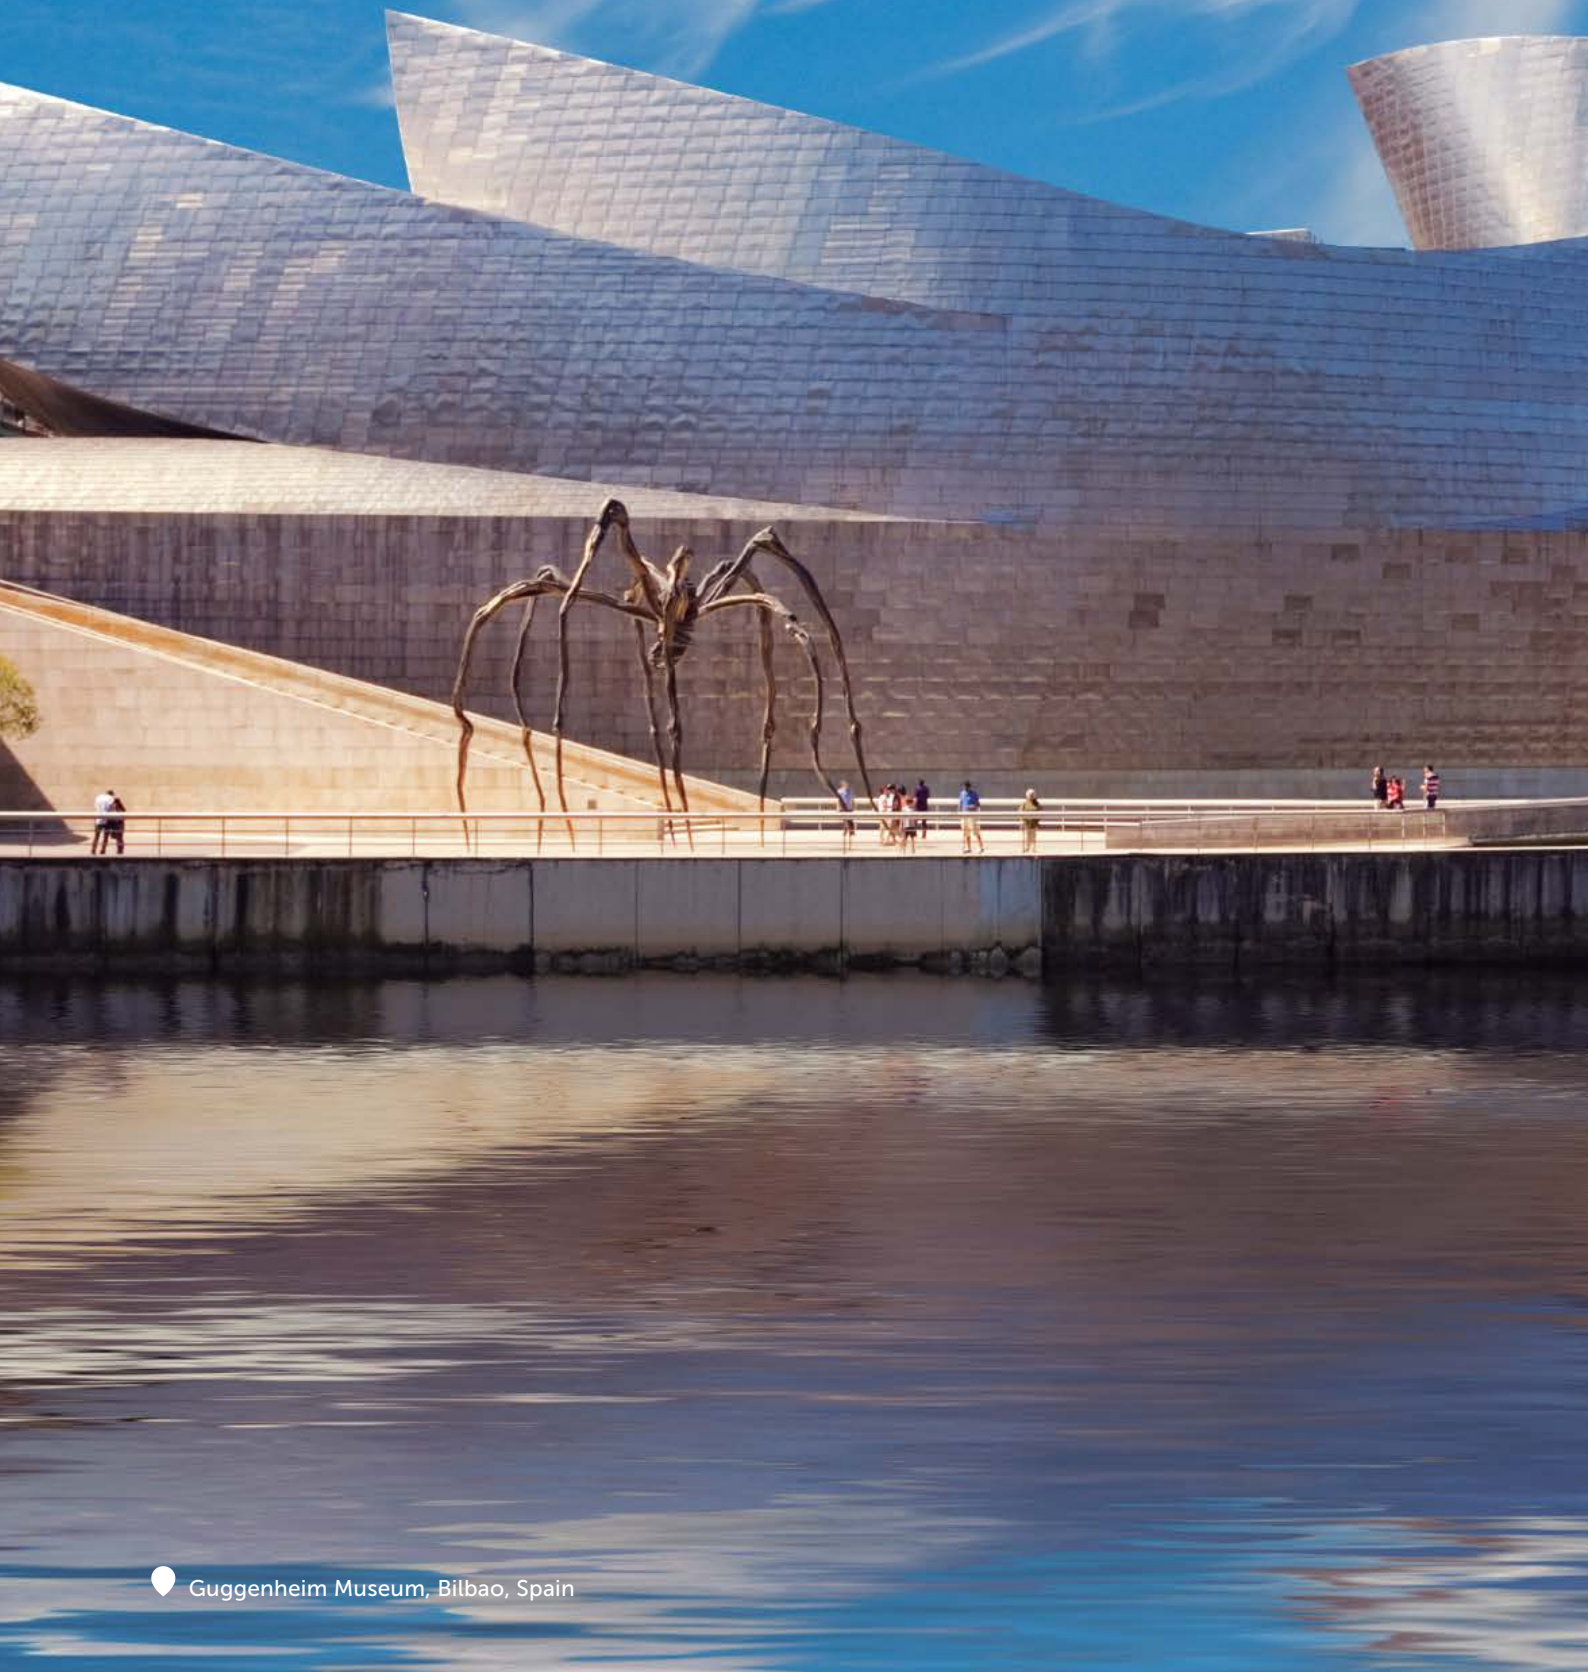*sturdiness is not at  
odds with beauty*







## STAINLESS STEEL SANITARY WARE

*Stainless steel sanitary products with an innovative, elegant and above all very robust and vandal proof design.*

- Vandal proof and manufactured in AISI 304 stainless steel, Mediclinics has a wide range of stainless steel sanitary products, ideal for installing in schools, penitentiaries, stadiums, concert halls, discotheques etc.
- Our lavatories, toilets, urinals, sinks, shower trays, squat toilets, etc. are robust and durable and are designed to satisfy the needs of a market that demands equipment with an up-to-date, functional and vandal proof design for the toilet facilities.
- Mediclinics stainless steel sanitary products requires minimum maintenance, and so contributes to the reduction in building service and maintenance costs.

# STAINLESS STEEL **SANITARY WARE**

*wash basin - recessed*



**SN0027C  
SN0031C  
SN0036C**

recessed sink

material: **AISI 304 stainless steel**  
finish: **bright**



**SN0027CS  
SN0031CS  
SN0036CS**

recessed sink

material: **AISI 304 stainless steel**  
finish: **satin**



**SNR027C  
SNR031C  
SNR036C**

recessed sink with overflow

material: **AISI 304 stainless steel**  
finish: **bright**



**SNR027CS  
SNR031CS  
SNR036CS**

recessed sink with overflow

material: **AISI 304 stainless steel**  
finish: **satin**



**KTR100**  
overflow kit

material: **AISI 304 stainless steel**  
finish: **bright**



## **SN0027C/CS · SN0031C/CS · SN0036C/CS · SNR027C/CS · SNR031C/CS · SNR036C/CS** COMPONENTS AND MATERIALS

**SN0027C/CS · SN0031C/CS · SN0036C/CS · SNR027C/CS  
SNR031C/CS · SNR036C/CS**

- One-piece construction
- Vandal-proof finishes

**SNR027CS · SNR031CS · SNR036CS · SNR027C · SNR031C  
SNR036C**

- With overflow hole

## **SN0027C/CS · SN0031C/CS · SN0036C/CS · SNR027C/CS · SNR031C/CS · SNR036C/CS** TECHNICAL SPECIFICATIONS

**SN0027C/CS · SN0031C/CS  
SN0036C/CS · SNR027C/CS  
SNR031C/CS · SNR036C/CS**



Steel thickness 1.2 mm

**SN0027C/CS · SNR027C/CS**  
Weight 0.55 Kg

**SN0031C/CS · SNR031C/CS**  
Weight 0.75 Kg

**SN0036C/CS · SNR036C/CS**  
Weight 0.95 Kg

**SNR027C/CS · SNR031C/CS ·  
SNR036C/CS**  
Overflow Ø 30 mm



	L1	Ø 1	Ø 2
SN0027C/27CS-SNR027C/27CS:	110 mm	265 mm	305 mm
SN0031C/31CS-SNR031C/31CS:	130 mm	315 mm	355 mm
SN0036C/36CS-SNR036C/36CS:	145 mm	355 mm	405 mm

# STAINLESS STEEL **SANITARY WARE**

*wash basin / wall mounted*



## **SN0300CS**

triple sink

material: **AISI 304 stainless steel**  
finish: **satin**



## **SN0200CS**

double sink

material: **AISI 304 stainless steel**  
finish: **satin**



## **SNLM44CS**

corner sink

material: **AISI 304 stainless steel**  
finish: **satin**



## **SN0300CS · SN0200CS · SNLM44CS** COMPONENTS AND MATERIALS

### **SN0300CS · SN0200CS · SNLM44CS**

- One-piece body
- Vandal-proof finishes

### **SNLM44CS**

- Bright finish optional

### **SN0300CS · SN0200CS**

- Optional siphon and waste pipe valve set

## **SN0300CS · SN0200CS · SNLM44CS** TECHNICAL SPECIFICATIONS

### **SN0300CS · SN0200CS**

Stainless steel thickness 1.5 mm

### **SNLM44CS**

Stainless steel thickness 1 mm

### **SN0300CS**

Weight 22.1 Kg

### **SN0200CS**

Weight 15.5 Kg

### **SNLM44CS**


Weight 3.1 Kg

### **SN0300CS · SN0200CS**

Waste pipe Ø 50 mm

### **SNLM44CS**

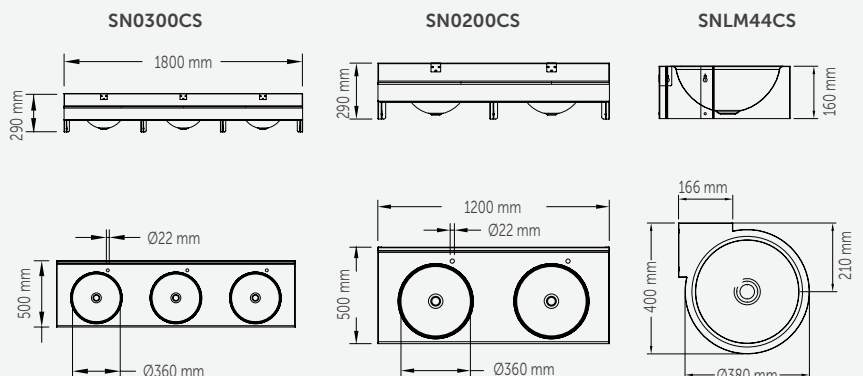Waste pipe Ø 45 mm



# STAINLESS STEEL **SANITARY WARE**

*wash basin / wall mounted*



**SNLM42CS**

material: **AISI 304 stainless steel**  
finish: **satin**



**SNLM38CS**

material: **AISI 304 stainless steel**  
finish: **satin**



**SNLM36CS**

material: **AISI 304 stainless steel**  
finish: **satin**



## SNLM42CS · SNLM38CS · SNLM36CS COMPONENTS AND MATERIALS

### SNLM42CS · SNLM38CS · SNLM36CS

- One-piece body
- Vandal-proof finishes
- Bright finish, optional
- If it is required, a drill can be performed to install an over-flow kit

### SNLM36CS

- Soundproofing inner foam
- Inspection inner door for its installation

## SNLM42CS · SNLM38CS · SNLM36CS TECHNICAL SPECIFICATIONS

### SNLM42CS

Stainless steel thickness	1 mm
Waste pipe diameter	Ø 45 mm
Weight	3.1 Kg

### SNLM38CS · SNLM36CS

Stainless Steel thickness	1.5 mm
---------------------------	--------

### SNLM38CS

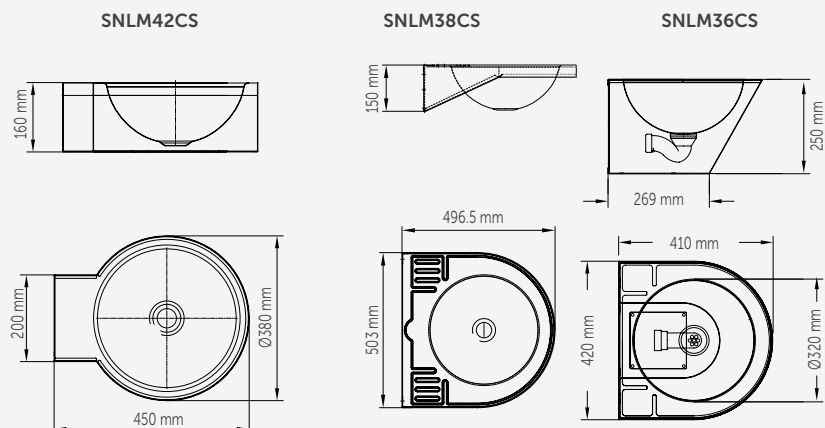
Weight	2.5 Kg
--------	--------

### SNLM36CS

Weight	8 Kg
--------	------

### SNLM38CS · SNLM36CS

Waste pipe diameter	Ø 45 mm
---------------------	---------



# STAINLESS STEEL **SANITARY WARE**

*wash basin / wall mounted*



## **SNLM35C**

material: **AISI 304 stainless steel**  
finish: **bright**

---

## **SNLM35CS**

material: **AISI 304 stainless steel**  
finish: **satin**



---

## **SNLM35C · SNLM35CS** COMPONENTS AND MATERIALS

---

### **SNLM35C · SNLM35CS**

- Perimetral bottom cover that hides the drainage system

---



## **SNLM35C · SNLM35CS** TECHNICAL SPECIFICATIONS

---

### **SNLM35C · SNLM35CS**

Stainless steel thickness	2 mm
Waste pipe	Ø 50 mm
Weight	5 Kg

### **SNLM35C · SNLM35CS**



# STAINLESS STEEL **SANITARY WARE**

*shower trays*



**SN0800CS**

material: **AISI 304 stainless steel**  
finish: **satin**



**SN0700CS**

material: **AISI 304 stainless steel**  
finish: **satin**



## SN0800CS · SN0700CS COMPONENTS AND MATERIALS

### SN0800CS · SN0700CS

- One-piece body
- Vandal-proof finishes
- Recessed model
- Non-slip system

### SN0800CS

- Adjustable horizontal outlet siphon (optional)

### SN0700CS

- Horizontal siphon valve (optional)

## SN0800CS · SN0700CS TECHNICAL SPECIFICATIONS

### SN0800CS · SN0700CS

Stainless steel thickness 1 mm

### SN0800CS


Waste pipe Ø 90 mm

Weight 5.9 Kg

### SN0700CS

Waste pipe Ø 40 mm

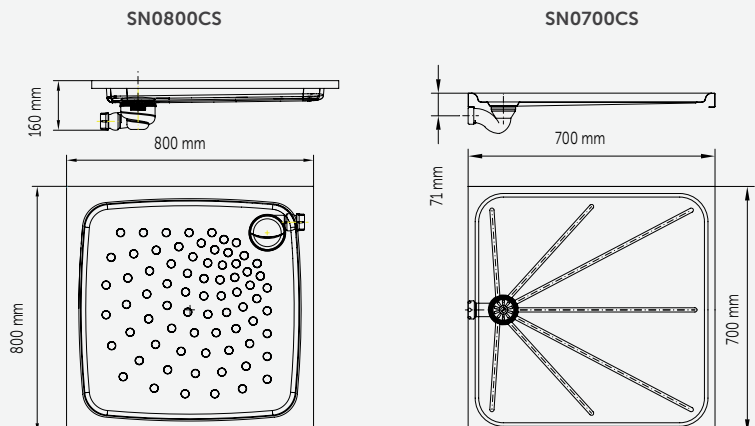Weight 5.3 Kg





# STAINLESS STEEL **SANITARY WARE** *urinals*

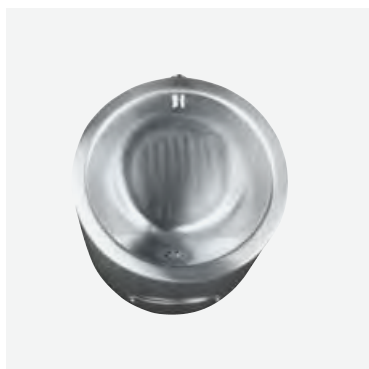


## SNU108C

material: **AISI 304 stainless steel**  
finish: **bright**

## SNU108CS

material: **AISI 304 stainless steel**  
finish: **satin**



## SNU106C

material: **AISI 304 stainless steel**  
finish: **bright**

## SNU106CS

material: **AISI 304 stainless steel**  
finish: **satin**



## SNU104C

material: **AISI 304 stainless steel**  
finish: **bright**

## SNU104CS

material: **AISI 304 stainless steel**  
finish: **satin**



### SNU108C · SNU108CS · SNU106C · SNU106CS · SNU104C · SNU104CS COMPONENTS AND MATERIALS

#### SNU108C/CS · SNU106C/CS · SNU104C/CS

- One-piece body
- Vandal-proof finishes
- Inspection door for installation
- Suitable for mains flush with timer or tap

#### SNU108C/CS · SNU106C/CS

- Siphon horizontal outlet
- Connection to mains inlet
- Water inlet for flush activation with cistern

#### SNU104C/CS

- Vertical waste pipe outlet
- Water inlet for flush activation with cistern

### SNU108C · SNU108CS · SNU106C · SNU106CS · SNU104C · SNU104CS TECHNICAL SPECIFICATIONS

#### SNU108C/CS · SNU106C/CS · SNU104C/CS

Stainless steel thickness	1.5 mm
---------------------------	--------

#### SNU108C · SNU108CS

Waste pipe	Ø 40 mm
Weight	7.9 Kg


#### SNU106C · SNU106CS

Waste pipe	Ø 40 mm
Weight	6.4 Kg


#### SNU104C · SNU104CS

Waste pipe	Ø 50 mm
Weight	6.2 Kg





#### SNU108C · SNU108CS



#### SNU106C · SNU106CS



#### SNU104C · SNU104CS



# STAINLESS STEEL **SANITARY WARE**

## toilets



### SN0110C

material: **AISI 304 stainless steel**  
finish: **bright**

### SN0110CS

material: **AISI 304 stainless steel**  
finish: **satin**



### SN0105C

material: **AISI 304 stainless steel**  
finish: **bright**

### SN0105CS

material: **AISI 304 stainless steel**  
finish: **satin**



### SN0108C

wall mounted

material: **AISI 304 stainless steel**  
finish: **bright**

### SN0108CS

wall mounted

material: **AISI 304 stainless steel**  
finish: **satin**



## SN0110C · SN0110CS · SN0105C · SN0105CS · SN0108C · SN0108CS COMPONENTS AND MATERIALS

- One-piece body
  - Vandal-proof finishes
  - Inspection door for installation.
- SN0110C · SN0110CS · SN0105C · SN0105CS**
- Horizontal waste pipe. With the addition of a PVC elbow adapter the outlet can be vertical (PVC elbow adapter not included)
  - Floor installed
- SN0110C · SN0110CS**
- Cistern with dual flush (6 or 3 liters)
- SN0105C · SN0105CS · SN0108C · SN0108CS**
- Water inlet through the top side of the cistern, right or left, depending on the water installation
  - Water inlet to the lavatory pan from the bottom of the cistern
- SN0108C · SN0108CS**
- Flush by means of a flushometer or a concealed cistern (flushometer or cistern not included)
  - Wall mounted
  - Horizontal waste pipe

## SN0110C · SN0110CS · SN0105C · SN0105CS · SN0108C · SN0108CS TECHNICAL SPECIFICATIONS

### SN0110C/CS · SN0105C/CS · SN0108C/CS

Stainless steel thickness	1.5 mm
Waste pipe	Ø 100 mm
Water inlet height	400 mm

### SN0110C · SN0110CS

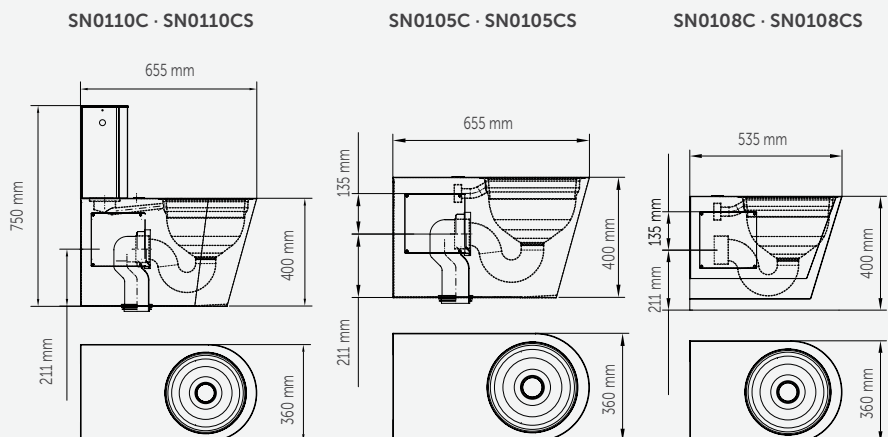
Water inlet	Ø 16.7 mm
Weight	22 Kg

### SN0105C · SN0105CS

Water inlet	Ø 56 mm
Weight	14 Kg

### SN0108C · SN0108CS

Water inlet	Ø 56 mm
Weight	9.7 Kg



# STAINLESS STEEL **SANITARY WARE**

*toilets / squatting pans*



## TP0130

seat with lid

material: **lacquered wood**  
finish: **mahogany colour**



## TP0135

seat with lid

material: **lacquered wood**  
finish: **black colour**



## SNPT01C

material: **AISI 304 stainless steel**  
finish: **bright**

## SNPT01CS

material: **AISI 304 stainless steel**  
finish: **satin**



### TP0130 · TP0135 · SNPT01C · SNPT01CS COMPONENTS AND MATERIALS

#### SNPT01C · SNPT01CS


- One-piece body
- Vandal-proof finishes
- Two frontal flush nozzles to clean the squatting pan
- Recessed mounted
- Anti-slip surface
- Drain accessories not included

### TP0130 · TP0135 · SNPT01C · SNPT01CS TECHNICAL SPECIFICATIONS


#### SNPT01C · SNPT01CS

Stainless steel thickness	1-1.5 mm
Waste pipe	Ø 100 mm
Inlet	2 inlets of 1 1/2"
Weight	7.5 Kg

#### TP0130 · TP0135



#### SNPT01C · SNPT01CS









#### L1/L2:

TP0130: 415x360 mm  
TP0135: 430x350 mm

# STAINLESS STEEL **SANITARY WARE**

Table

	MODEL	MATERIAL		INSTALLATION				SUITABLE FOR				
		Stainless steel bright finish	Stainless steel satin finish	Recessed	Surface mounted	Wall mounted	Floor installed	Offices, official organisations, schools & similar	Gyms, sport centers & similars	Hospitals, health centers facilities, edery care homes & similar	Hotels and other accommodations	Airports, shopping malls & similars
	SN0027C	●		●				●	●	●	●	●
	SN0031C	●		●				●	●	●	●	●
	SN0036C	●		●				●	●	●	●	●
	SN0027CS		●	●				●	●	●	●	●
	SN0031CS		●	●				●	●	●	●	●
	SN0036CS		●	●				●	●	●	●	●
	SNR027C	●		●				●	●	●	●	●
	SNR031C	●		●				●	●	●	●	●
	SNR036C	●		●				●	●	●	●	●
	SNR027CS		●	●				●	●	●	●	●
	SNR031CS		●	●				●	●	●	●	●
	SNR036CS		●	●				●	●	●	●	●
	SN0300CS		●		●			●		●		●
	SN0200CS		●		●			●		●		●
	SNLM42CS		●		●			●		●		●
	SNLM44CS		●		●			●		●		●
	SNLM38CS		●		●			●		●		●
	SNLM36CS		●		●			●		●		●
	SNLM35C	●				●		●		●		●
	SNLM35CS		●			●		●		●		●
	SN0800CS		●	●				●	●	●	●	●
	SN0700CS		●	●				●	●	●	●	●
	SNPT01C	●		●						●	●	●
	SNPT01CS		●	●						●	●	●
	SNU104C	●				●		●	●			●
	SNU104CS		●			●		●	●			●
	SNU106C	●				●		●	●			●
	SNU106CS		●			●		●	●			●
	SNU108C	●				●		●	●			●
	SNU108CS		●			●		●	●			●
	SNU105C	●					●	●	●		●	●
	SNU105CS		●				●	●	●		●	●
	SNU110C	●					●	●	●		●	●
	SNU110CS		●				●	●	●		●	●
	SN0108C	●				●		●	●		●	●
	SN0108CS		●			●		●	●		●	●

12

## DRINKING WATER FOUNTAINS

*much more closer to nature*





GEORGEIA STATE



## **DRINKING WATER FOUNTAINS**

*Elegantly and robustly designed drinking water fountains.*

- Mediclinics offers fountains directly connected to a water inlet made in AISI 304 stainless steel. Elegantly designed and strong fountains, designed for both interior and exterior locations.
- Ideal for installation in schools, office buildings, airports, hospitals, shopping centres, etc. Whatever you need, Mediclinics offers you the best solution.

# DRINKING WATER FOUNTAINS

## *fountains*



### FAM110CS

wall fountain

material: **AISI 304 stainless steel**  
finish: **satin**



### FAM120CS

wall fountain

material: **AISI 304 stainless steel**  
finish: **satin**



### FA0100CS

floor fountain

material: **AISI 304 stainless steel**  
finish: **satin**



## FAM1101CS · FAM120CS · FA0100CS COMPONENTS AND MATERIALS

### FAM110CS · FAM120CS · FA0100CS

- Chromed brass push button bubbler
- Connection to water mains and drain

### FAM110CS · FAM120CS

- Rear attachment to wall
- Bright finish, to order

### FAM120CS

- Chromed brass push lever glass filler

### FA0100CS

- High dent resistance
- Clamping flange to fix the fountain to the floor
- Different heights, to order
- Soundproofing inner foam

## FAM1101CS · FAM120CS · FA0100CS TECHNICAL SPECIFICATIONS

### FAM110CS

Water inlet	3 / 8"
Water outlet	Ø 40 mm

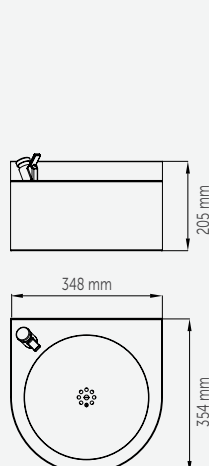
### FA0100CS

Weight	15.5 Kg
--------	---------


### FAM120CS · FAM110CS

Weight	2.9 Kg
--------	--------


### FAM110CS



### FAM120CS

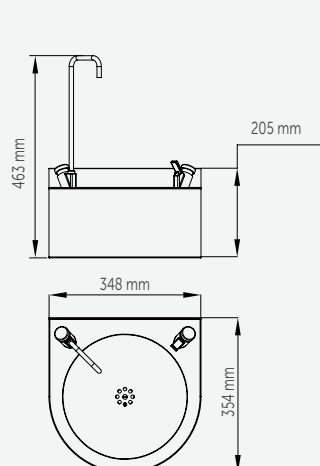

### FA0100CS

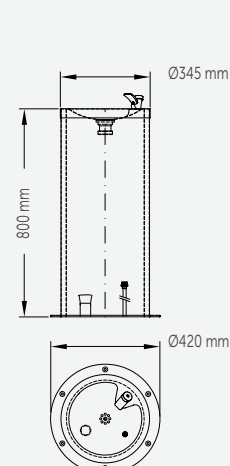



**B**

**SIGNAGE**

*to get one's bearings has never been easier*







## SIGNAGE

*Finding your way was never so easy.*

- Mediclinics offers a wide range of signs produced in satin stainless steel for placing in public places for guidance.
- Easily understood pictograms with an up to date design that are easily integrated into any location that requires them.
- Easy to install, our sign plates are supplied with strong adhesive, ready to be applied on any smooth surface

# SIGNAGES

visual communication




**PS0001CS**  
unisex toilet

material: **stainless steel**  
finish: **satin**



**PS0002CS**  
women's toilet

material: **stainless steel**  
finish: **satin**



**PS0003CS**  
men's toilet

material: **stainless steel**  
finish: **satin**




**PS0004CS**  
adapted toilet

material: **stainless steel**  
finish: **satin**




**PS0005CS**  
nappy changing

material: **stainless steel**  
finish: **satin**




**PS0006CS**  
breast-feeding

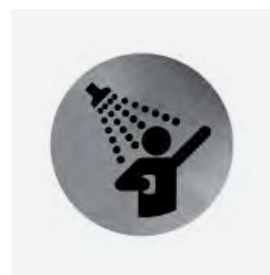material: **stainless steel**  
finish: **satin**



**PS0007CS**  
showers

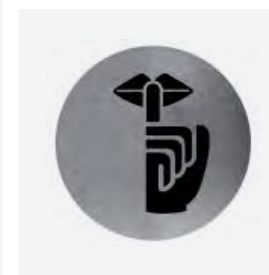material: **stainless steel**  
finish: **satin**



**PS0008CS**  
silence

material: **stainless steel**  
finish: **satin**



**PS0009CS**  
no smoking

material: **stainless steel**  
finish: **satin**




**PS0010CS**  
mobile use prohibited

material: **stainless steel**  
finish: **satin**



## TECHNICAL SPECIFICATIONS

Dimensions	Ø 116 mm
Thickness	0.5 mm

A stylized logo consisting of the letters 'I' and 'N' in a bold, black, serif font. The 'I' is positioned to the left of the 'N', and they are both vertically aligned. The 'N' has a unique design with a diagonal line through its center.

## ANNEXES

*all the information you  
need at hand*



# ANNEXES

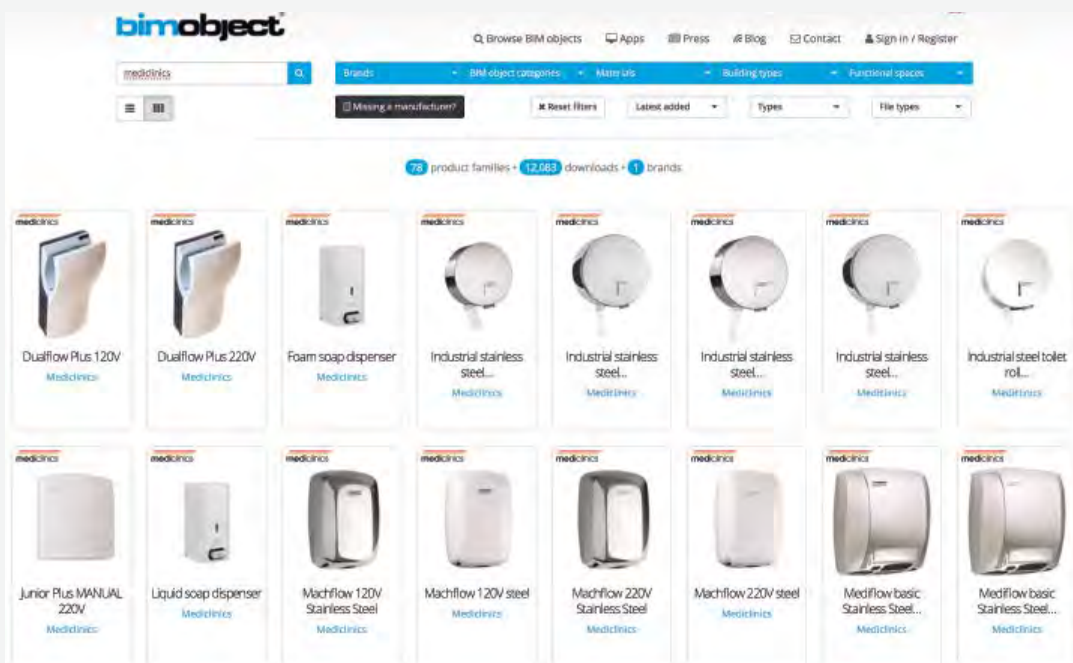
## Mediclinics BIM project



According to our policy on Innovation, Total Quality and Customer Focus, in September 2015 Mediclinics launched more than 150 products out of its general catalogue, which features more than 750 products, in the BIMObject® cloud.


Mediclinics was the first manufacturing company of hand dryers and washroom accessories for collectivities that published this huge amount of BIM objects at once.

All of these BIM objects are, currently, available to be downloaded in the latest versions of the Revit, ArchiCAD and SketchUp platforms in [www.bimobject.com](http://www.bimobject.com).



BIM stands for Building Information Modeling, or Building Information Model. It describes the process of designing a building collaboratively using one coherent system of computer models rather than as separate sets of drawings.

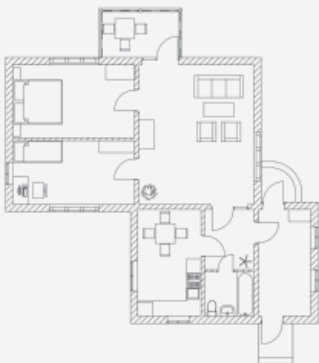
Nowadays there is a significant trend to replace the traditional CAD symbols by BIM objects. BIM objects still carry the representation of the product in 2D and 3D like a CAD file would, but they also carry much more.



2D Project



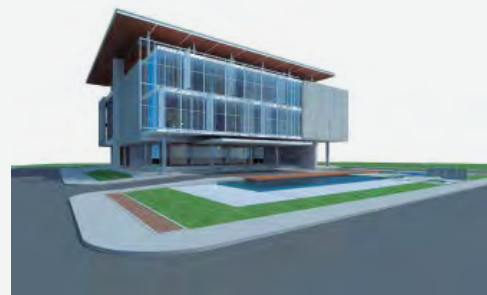3D Project




BIM Project

# ANNEXES
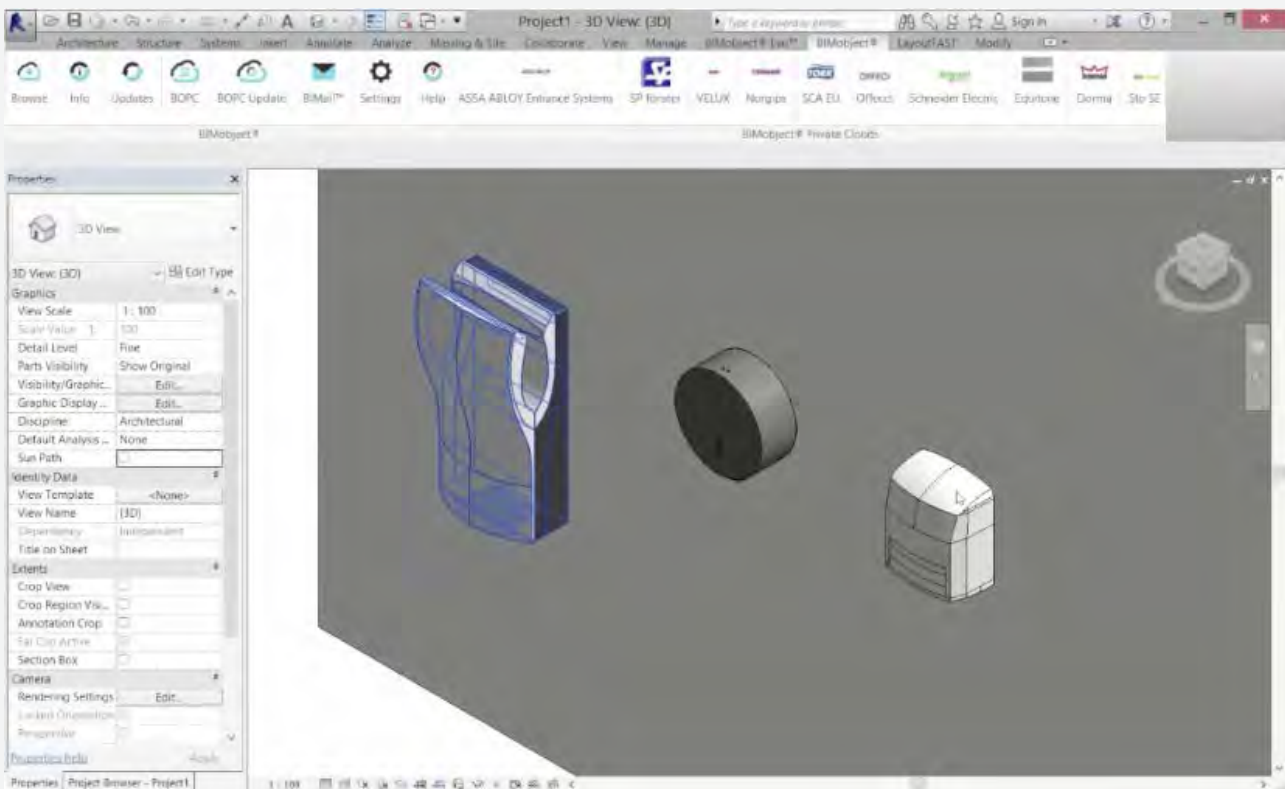
## Mediclinics BIM project

When it comes to a hand dryer, a BIM object may contain:

- Geometry and dimensions information (2D/ 3D drawings)
- Technical characteristics (voltage, frequency, power, air speed, etc. )
- MEP (Mechanical, Electrical and Plumbing) connections
- Installation manuals
- Maintenance videos
- Product sketches
- Business information
- Product certifications



BIM is important to our industry because:

- Improves Productivity and Reduces Cost
- Decreases Reworks
- Provides Related Documents
- Gives Complete Project Snapshot
- Improves Coordination
- Enhances Customer Satisfaction



# ANNEXES

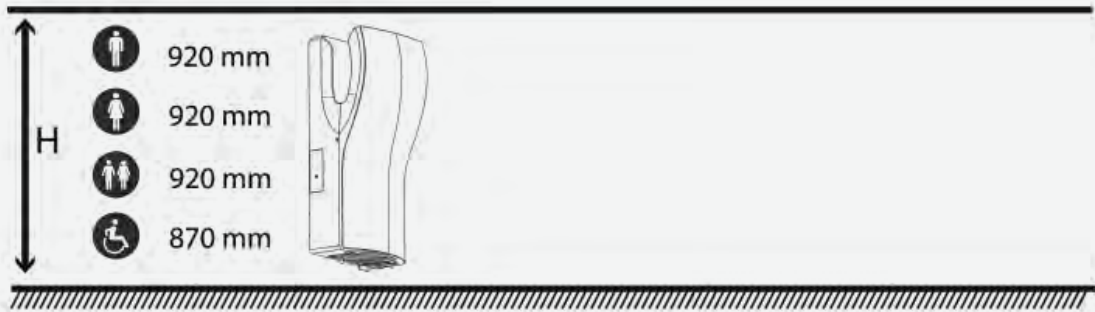
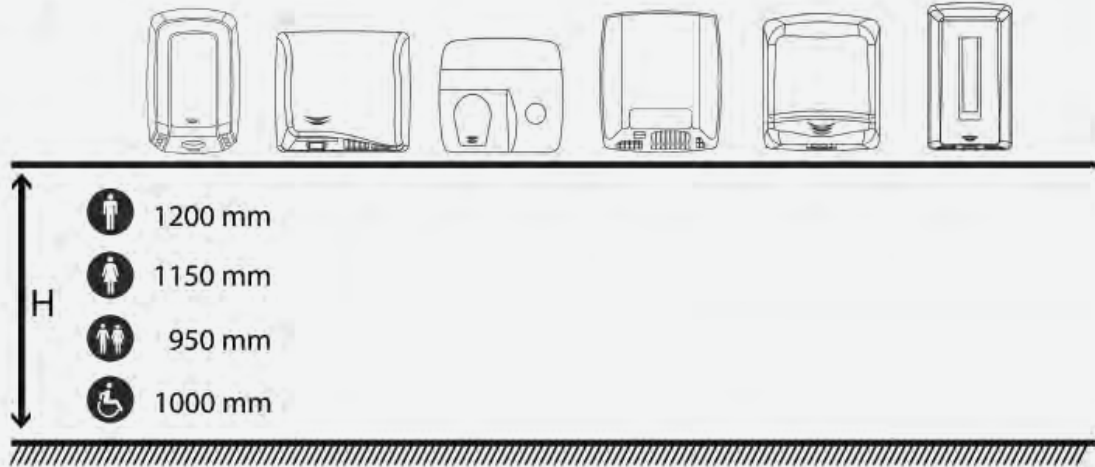
## summary of recessed range

		WHITE EOXY STEEL	BRIGHT STAINLESS STEEL	SATIN STAINLESS STEEL	BRIGHT CHROMED BRASS	PAGE
<b>HAND DRYERS</b>						
	E05 + KT0005 E05C + KT0005C E05CS + KT0005CS	●	●	●		49
	M03A + KT0010 M03AC + KT0010 M03ACS + KT0010	●	●	●		53
	M09A + KT009 M09ACS + KT009CS	●	●			34
<b>SOAP DISPENSERS</b>						
	DJT118 DJ0252AC		●		●	87 80
	DJE0010CS			●		87
<b>PAPER TOWEL DISPENSERS</b>						
	DTE0020CS			●		107
<b>BINS</b>						
	PPE0010CS			●		116
<b>MULTI-PURPOSE CABINETS</b>						
	DTES0040CS			●		125
	DTE0030CS			●		126
	DTE0050CS			●		126
<b>BATHROOM ACCESSORIES</b>						
	AIE0310C		●			138
	AIE0310CS			●		138
	AIE0320C		●			138
	AIE0320CS			●		138


# ANNEXES

installation examples

## Height for hand dryers






## Height for hair dryers

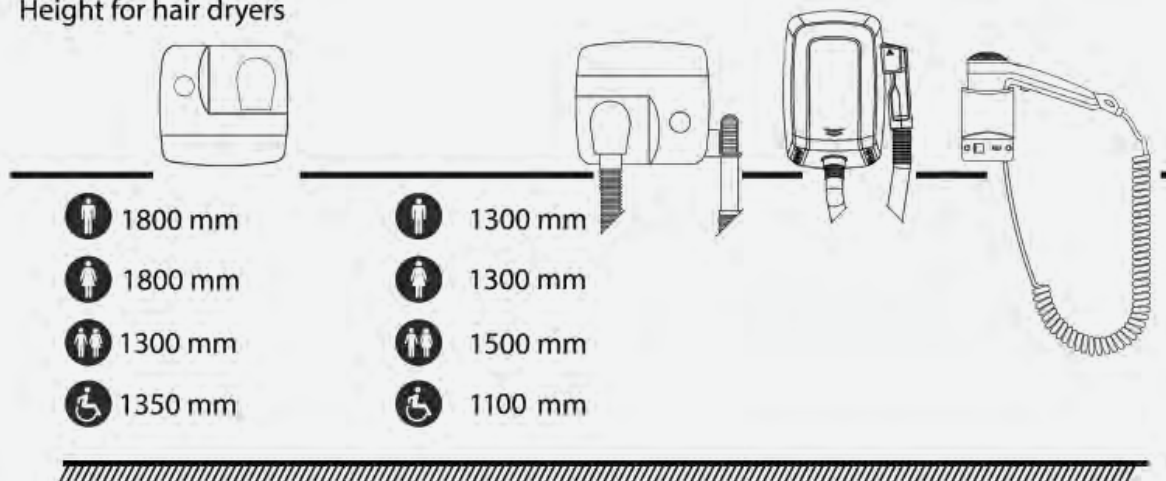



# ANNEXES

installation examples
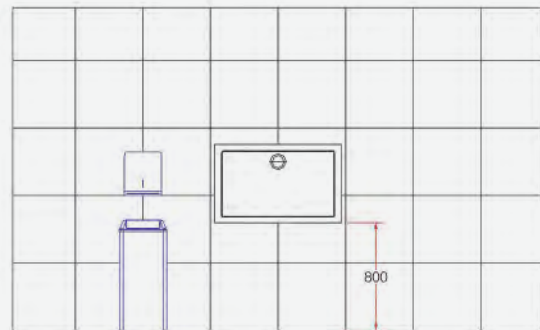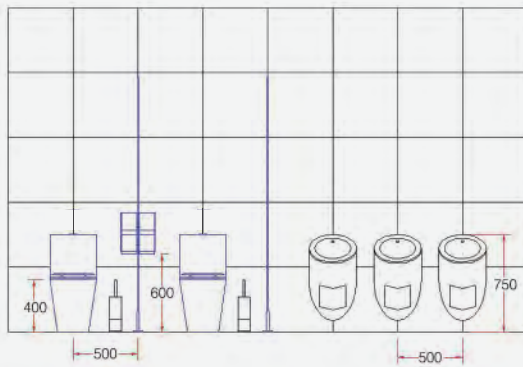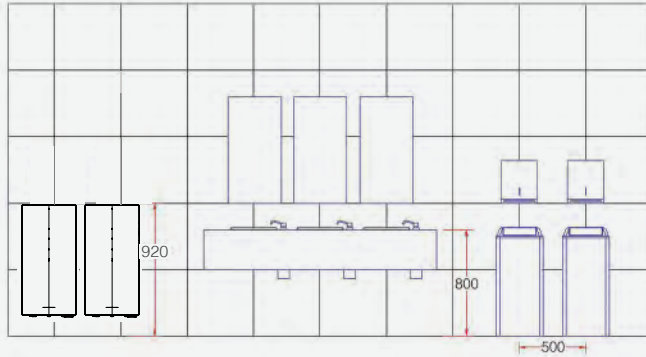
## AIRPORT



## COFFEE SHOP


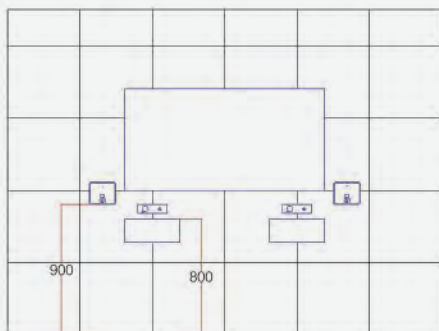
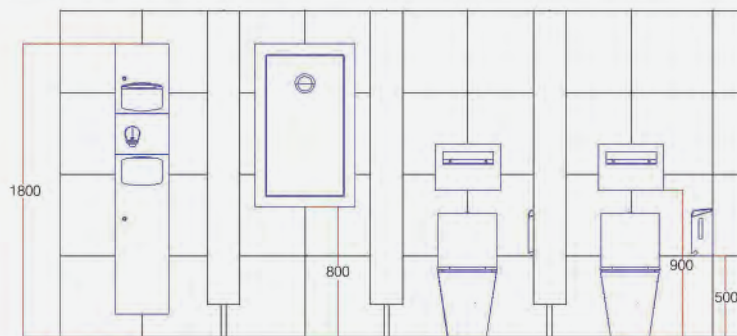


All measures are expressed in mm


# ANNEXES

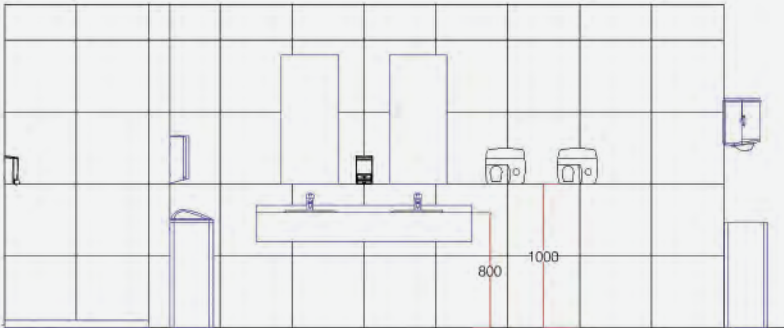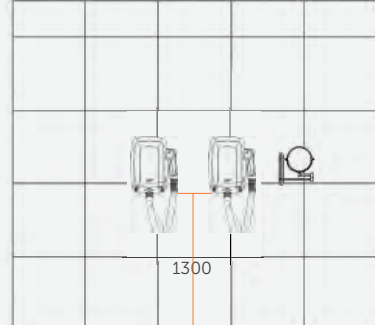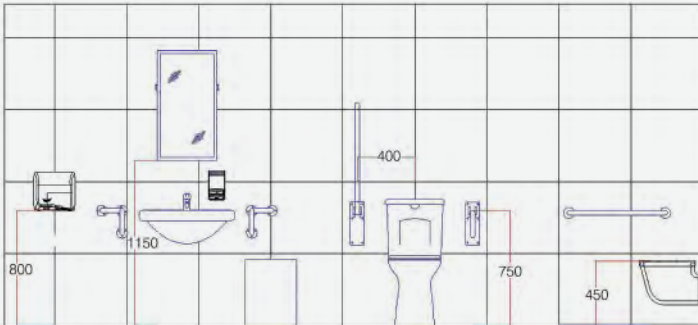installation examples




## GYM



## HOTEL

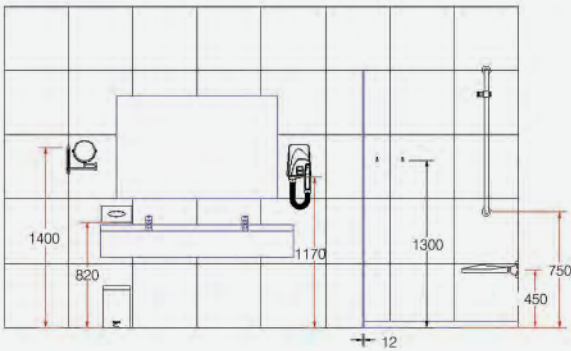

## EDERLY HOME

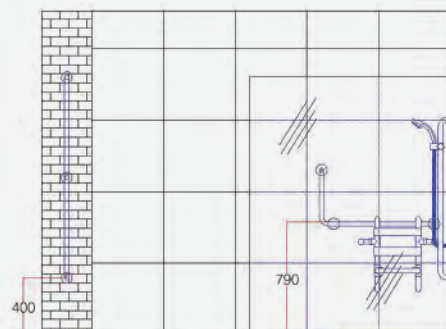



All measures are expressed in mm

# ANNEXES

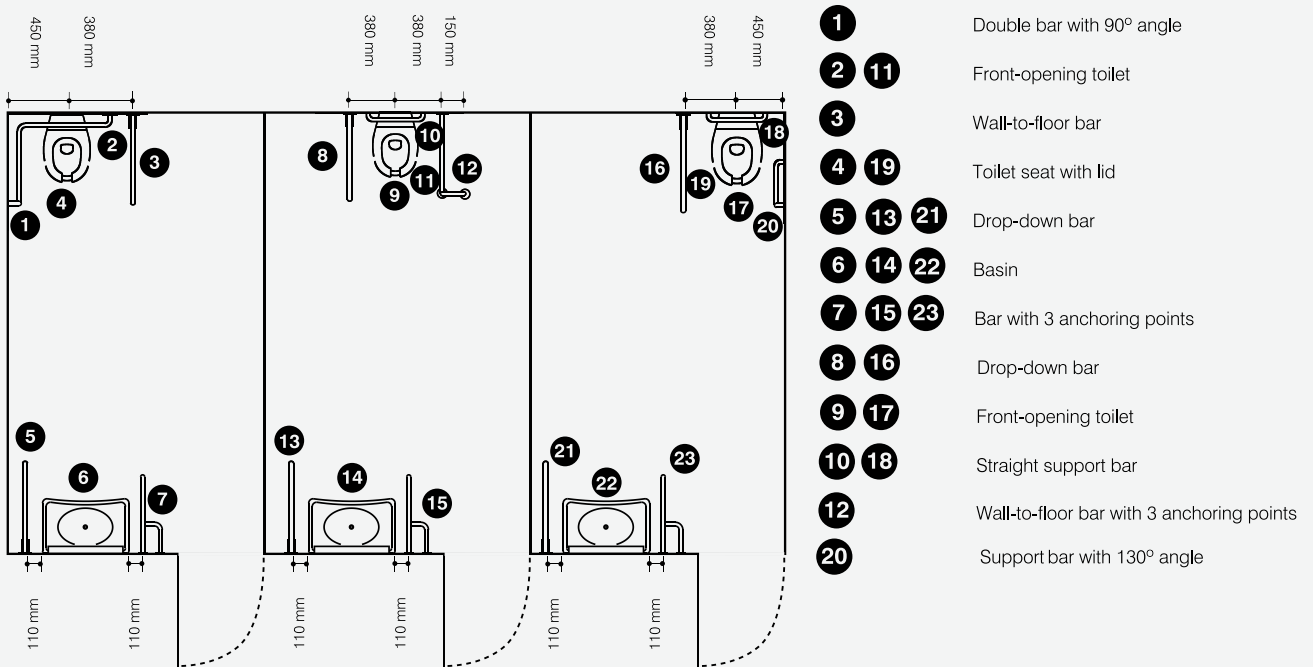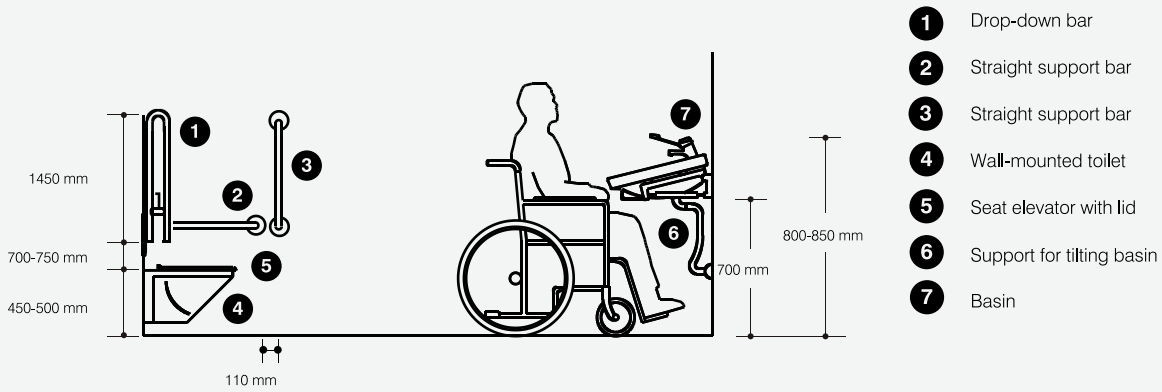installation examples


## ACCESSIBLE PUBLIC BATHROOM



# ANNEXES


installation examples
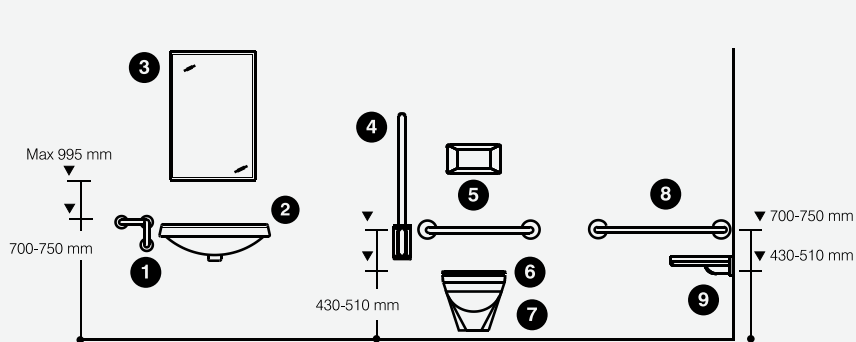
## ACCESSIBLE DOMESTIC AND PUBLIC BATHROOM



- 1 Bar with 3 anchoring points
- 2 Basin
- 3 Tilting mirror
- 4 Drop-down bar
- 5 Straight support bar
- 6 Toilet seat with lid
- 7 Front-opening toilet
- 8 Straight support bar
- 9 Drop-down shower seat

## ACCESSIBLE DOMESTIC AND PUBLIC BATHROOM

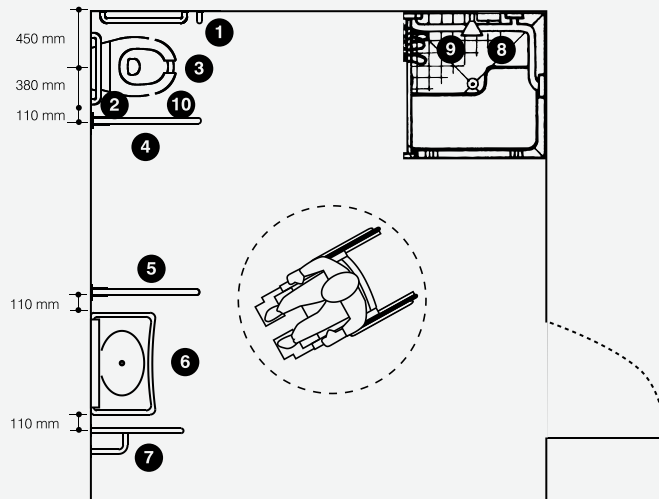

- 1 Straight support bar
- 2 Straight support bar
- 3 Wall-mounted toilet
- 4 Drop-down support bar
- 5 Drop-down bar
- 6 Basin
- 7 Support bar with 3 anchoring points
- 8 Drop-down seat
- 9 Horizontal bar between 2 walls
- 10 Seat elevator with lid

# ANNEXES

## *advice on cleaning stainless steel*

### GENERAL INSTRUCTIONS

- Before applying any treatment, totally remove the plastic protection from the stainless steel.
- As a general rule, use only a gentle cloth dipped in soapy water.
- Always dry the treated surface using a gentle cloth.
- Applying certain cleaning treatments can change the tone of a piece's finish therefore it may be necessary to treat the entire piece.
- Do not use rough cloths, paper cloths or scouring pads.
- In the cleaning process never use bleach, products based on hypochlorite dissolutions, liquids made with strong acids, frequently used in the floor and wall cleaning, nor hydrochloric acid or products containing petrol.
- Pay special attention to the components of cleaning products, especially those specifically for cleaning bathrooms.
- In exceptional cases, polish very specific areas and with extreme care. Subsequently, apply a soft cloth dipped in soapy water and dry thoroughly.
- The printed markings come off easily when these cleaning processes are applied. Therefore, when possible, prevent application on top of the logos or other printed markings.

### CLEANING SPECIFICATIONS

	CLEANING PRODUCT	CLEANING METHOD
<b>REGULAR CLEANING</b>	<ul style="list-style-type: none"> <li>•Gentle domestic liquid soap.</li> <li>•Water.</li> </ul>	<ul style="list-style-type: none"> <li>•Use a duster, a washing cloth or soft sponge, dipped in soapy water.</li> <li>•Dry the treated surface.</li> <li>•If the product is subjected to hostile environments, such as salt (near the sea), intense humidity, chlorine (swimming pools), hard water, etc. a further treatment in addition to regular cleaning is recommended involving the application of a household product containing silicon.</li> </ul>
<b>MEDIUM RESISTANCE STAINS</b> (e.g.: fingerprints)	<ul style="list-style-type: none"> <li>•Same as above.</li> <li>•Specific household products for stainless steel, such as "Tarni Shield Inox" manufactured by 3M.</li> </ul>	<ul style="list-style-type: none"> <li>•Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions, ensuring that the product is in liquid or cream form. If using sprays, apply the product onto the cloth, not directly onto the surface to be treated.</li> </ul>
<b>HIGH RESISTANCE STAINS</b> (e.g.: decolouration due to atmospheric agents)	<ul style="list-style-type: none"> <li>•If the processes above do not provide satisfactory results, use, with care, household products for cleaning chrome, degreaser or dissolving products. Never products specifically designed for tin or copper, since they can affect the colour of the steel. The product "Tarni Shield Inox" recommended above can be useful in these cases.</li> </ul>	<ul style="list-style-type: none"> <li>•Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions, ensuring that the products are in liquid or cream form. Before treating the entire affected surface, carry out a test on a small area.</li> </ul>
<b>MINERAL STAINS</b> (e.g.: limescale or hard water)	<ul style="list-style-type: none"> <li>•Dilute 5% of white vinegar in water.</li> <li>•Specific household products for treating limescale, with a silicon protector base (containing acetic or phosphoric acid).</li> </ul>	<ul style="list-style-type: none"> <li>•Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions. Before treating the entire affected surface, carry out a test on a small area.</li> </ul>
<b>RUST STAINS CAUSED BY INADEQUATE CLEANING</b>	<ul style="list-style-type: none"> <li>•Any of those mentioned above, excluding those indicated for high resistance stains. You can use "Scotch Brite special non-scratch for vitro-ceramics by 3M".</li> </ul>	<ul style="list-style-type: none"> <li>•Polish gently and carefully using the 3M Scotch Brite in the direction of the grain or lines.</li> <li>*NOTE: This method only applies to satin finishes (rough polish), never to bright finishes (high polish).</li> </ul>

# ANNEXES

## Point of sale advertising

Mediclinics offers different displays that might be of your interest for your marketing efforts and promotions.

### MK0267 Display

Display made of steel, to showcase the Dualflow Plus hand dryer, highlighting the benefits of the eco-friendly drying. It includes support for the informative pamphlets. Measurements: 1,200 x 495 x 360 mm

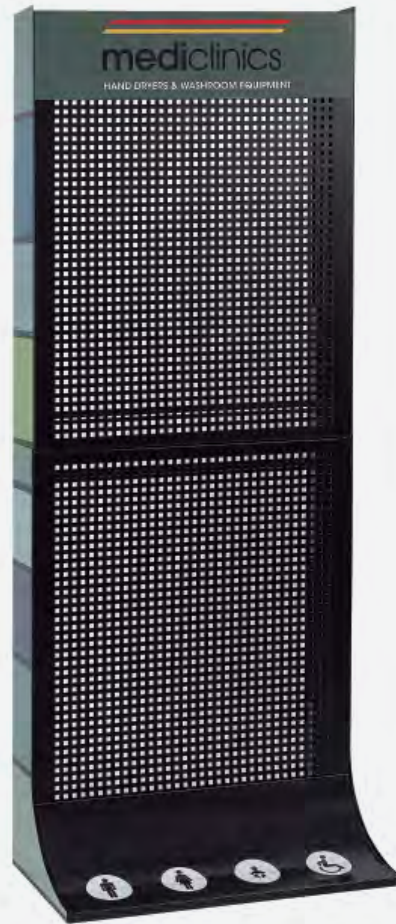


machine not included

### MK0305 Display

Display made of steel, to simply and effectively display our products.

Measurements: 1,980 x 750 x 420 mm





# ANNEXES

## certifications


### GS/UL

- Guarantees that the stated technical specifications (voltage, power, consumption, etc.) .
- Guarantees that the user can never get access to live parts of the appliance.
- Guarantees that the equipment will never experience abnormal temperature increases.
- Guarantee that the user will never receive an electric shock from touching accessible metal parts.
- Guarantees that our hand dryers are protected against temporary power surges.
- Guarantees that our appliances are humidity-proof to IP21, IP23 or IPX4, depending on the model.
- Guarantees that the covers of our hand dryers can withstand impact energy of 0,5 J.



### EMC

- Guarantees that our appliances will not have any negative impact or cause collateral damage to other electrical or electronic devices close to them from the emission of continuous or discontinuous disturbances.
- Guarantees that our appliances operate optimally without being interfered by other devices in the area, whether radiated or conducted through the electricity network.
- Guarantees that our appliances operate optimally without generating interference, whether radiated or conducted, that may affect the operation of other devices in the area.



### BLUE ANGEL

Blue Angel is an environmental label organized by the federal government of Germany for the protection of people and the environment. It sets very exacting standards, is independent and has proven itself over more than 35 years as a guide for selecting environmentally-friendly products. Its main target is the climate protection, a reduction in energy consumption and the avoidance of pollutants and waste are key objectives of environmental protection.

The Blue Angel eco-label for electric hand dryers may be awarded to products featuring the following environmental properties:

- low energy consumption
- achievement of a high degree of dryness
- durable, safe and recyclable design
- avoidance of environmentally damaging materials.



### BUILDING GREEN

Building Green helps architects, designers and other sustainability professionals make their projects greener and healthier offering an independent product evaluation service. It is a database of green products, specifications and practices for use by architects, and construction professionals. This database includes thousands green building products.

Use of electric hand dryers generally carries significantly lower environmental burdens than use of paper towels. Electric hand drying also significantly reduces custodial labor requirements.

Building Green lists high-performance electric hand dryers that are energy-efficient, fast, and convenient – maximum 1,600 watts, less than 15 seconds drying time, resulting in significantly lower energy use than conventional electric hand dryers.

Mediclinics' Hand Dryers that are Building Green Approved:

- DualFlow Plus M14
- MachFlow M09
- SpeedFlow M06
- Speedflow Plus M17









































### ISO 9001

- Guarantees the company is 100% customer-orientated.
- Strengthens customers' faith in the company, commensurate with the company's ability to consistently provide the agreed products and/or services.
- Facilitates the opening of new markets both nationally and internationally.
- Improves our competitive position in terms of increased revenue and market share.
- Increases productivity as a result of continuous improvements in our internal processes. Improves our internal organization thanks to more fluid communications, with set objectives and responsibilities.
- Orientation towards continuous improvement which allows us to identify new opportunities to improve the objectives we have already achieved.
- Greater response capacity and flexibility in addressing the changing opportunities in the market.
- Improves the capacity to create value, in terms of both the company itself and its suppliers and strategic partners.
- Improves the motivation of the organization's staff and their willingness to work as a team.



# ANNEXES

## certifications

		CERTIFICATE / QUALITY MARK				
		GS	EMC	BLUE ANGEL	UL	BUILDING GREEN
HAND DRYERS	dualflow® plus					
	machflow®					
	speedflow® plus					
	speedflow®					
	saniflow®					
	mediflow®					
	optima® / prima®					
	junior plus®					
	smartflow®					
HAIR DRYERS	smartflow®					
	machflow®					
BABY CHANGING STATIONS	Babymedi®					

\* UL-NOM (MEXICO) : Dualflow plus, Machflow

- Descriptive table of Mediclinics' certified products and the organizations that endorse them.



**ADA. ACCESSIBILITY STANDARD FOR BUILDINGS AND INSTALLATIONS**



**UNE 41523. BUILDING ACCESSIBILITY STANDARD HYGIENIC AREAS HEALTH CENTRES**

**ANSI S117.1 ACCESSIBILITY AND USABILITY OF BUILDINGS AND FACILITIES**

If installed correctly:

- Eliminates architectural barriers and facilitates access to any space for people with reduced mobility.
- Allows people with reduced mobility to manoeuvre close to and use the appliances in any space.
- Designs products suitable for the specific needs of people with reduced mobility.
- Achieves shapes and textures that perfectly meet the needs of people with reduced mobility.
- Provides people with reduced mobility with the elements that allow them to move safely within any space

# ANNEXES

## world wide job references

### AIRPORTS:

- United Airlines VIP red carpet Clubs, across USA
- JFK International Airport New York, NY
- Bandaranaike International Airport, Colombo, Sri Lanka
- Chennai International airport, India
- Istanbul Airport, Turkey
- Charles de Gaulle international airport, Paris, France
- Monterrey international Airport, Mexico
- Barcelona - El Prat Airport, Spain
- Queen Alia International Airport, Amman, Jordania
- Sidney International Airport, Sidney, Australia

### CASINOS:

- Lloret de Mar Casino, Girona, Spain
- Sydney Opera House and Casino, Australia
- The Crown Casino, Melbourne, Australia

### CINEMA & THEATERS

- UGC Cinemas, Paris, France
- Cines Villegas, Buenos Aires, Argentina
- Broadway Cinema at Hollywood Plaza, Hong Kong
- Cineplex, Perú
- Royal Opera House, Muscat, Oman
- Sydney Opera House and Casino, Australia
- Royal Theatre, Madrid, Spain
- La Casona Theatre, Buenos Aires, Argentina
- Cinemark movie theaters, across USA
- Century movie theaters, across USA

### HOSPITALS:

- Curious Mind Child Development Center, Washington D.C.
- South Lake Hospital, Clermont, FL
- Santa Creu i Sant Pau Hospital, Barcelona, Spain
- St. Teresa's Hospital, Kowloon, Hong Kong
- Queen Mary Hospital, Hong Kong
- Central University Hospital of Asturias, Spain
- Sembawang Nursing Home, Singapore
- Cliniche moderne San Marco, Latina, Italy
- Ghayati Hospital, Abu Dhabi, UAE

### HOTELS:

- Gran Hyatt Hotel Chicago, Chicago, IL
- Gran Hyatt Hotel, San Francisco, CA
- Crown Regency Hotel, Manila, The Philipines
- Hotel Best western Sumadja, Belgrade, Serbia
- Hotel Ritz Carlton, Bahrain
- Hotel Intercontinental, Johannesburg, South Africa
- Hotel Sheraton, Montevideo, Uruguay
- Hotel Epic Sana, Lisboa, Portugal
- Melià, Hotusa & AC Hotels, across Europe
- Gran Hyatt at Chicago & San Francisco, USA

### MUSEUMS:

- Brooklyn Children's Museum, Brooklyn, NY
- Alexander Museum, Tel Aviv, Israel
- The National Maritime Museum, Sydney, Australia
- Guggenheim Museum, Bilbao, Spain
- Museo del Prado, Madrid, Spain
- National Museum, Warsaw, Poland

### STADIUMS:

- Dodger Stadium, Los Angeles, CA
- Ibn Battouta Olympic Stadium, Tanger, Morocco
- Football Stadium Camp Nou, Barcelona, Spain
- Football Stadium Santiago Bernabeu, Madrid, Spain
- London 2012 Olympics Stadium, UK
- Old Trafford Stadium, Manchester, UK
- Sydney Olympics Venues, Australia

### RACECOURSES & CIRCUITS:

- F1 racetracks of Abu Dhabi & Bahrain
- Meydan racecourse, Dubai, UAE

# ANNEXES

## world wide job references

### RAILWAY STATIONS:

- Ferryboat central station "Buque-Bus", Buenos Aires, Argentina
- Hong Kong MTR Stations, Hong Kong

### RECREATIONAL & THEME PARKS:

- Sentosa Island Theme Park, Singapur
- Port Aventura, Tarragona, Spain
- Delaware State Fairgrounds, Delaware, USA

### RESTAURANTS:

- Burger King, across Europe
- McDonalds, across Europe
- Dunkin' Donuts, Chicago, IL
- Arby's restaurant, New Albany, IN
- Subways franchise restaurants, FL
- Dominos Pizza, New York, NY
- Kokoriko franchises, Colombia
- Tramvai, Milan, Italy

### SCHOOLS:

- San Jose City College, San Jose, CA
- Dan D. Rogers elementary school, Dallas, TX
- York College of Pennsylvania, PA
- Troy Shorewood Elementary School, Shorewood, IL
- Ecole Polymechanique, Laval, Quebec, Canada
- Academie Ste. Therese, Rosemere, Quebec, Canada
- Harrow International School, Singapore
- The Hills Sports High School, Australia

### SHOPPING CENTERS:

- Polo Park shopping Center, Winnepeg, Manitoba, Canada
- Bangsar shopping vaillage, Kuala Lumpur, Malaysia
- Top Ride city shopping mall at Central North, Ryde, Australia
- Manly wharf, Sidney, Australia
- Sopping center Miraflores, Guatemala city, Guatemala
- Tel Aviv Towers at Azrieli Mall, Israel
- An Phu Plaza, Ho Chi Minh, Vietnam

### SPORT CENTERS & GYMS:

- Canottieri Milano, Italy
- Metropolitan, across Spain
- Health Works Fitness, Queensland, Australia
- DIR Fitness Centers, Barcelona, Spain
- Reebok Sports Club, Madrid, Spain

### STORES:

- Wal Mart Stores & Superstores, nationwide
- Umbria Gomme, Milano, Italy
- Ikea Stores, across Europe

### UNIVERSITIES:

- Pennsylvania State University - Residential Housing, PA
- University of California - Berkeley, Vance Brown Bldg., CA
- National University of Singapore, Singapore
- Hong Kong University, Centennial Campus, Hong Kong
- Lebanon University Campus, Beirut, Lebanon
- Queen Mary, University of London, UK
- Universidad Autónoma Metropolitana, Mexico City, Mexico
- ESADE, Barcelona, Spain

### OTHERS:

- Ohio State Penitentiary, Youngstown, OH
- Texas Department of Transportation, TX
- New York Stock Exchange Building, New York, NY
- Brazos Town Hall, Rosenberg, TX
- Nassau Tennis Club, Skillman, NY
- Glendale Heights Police Station, Glendale Heights, IL

## ANNEXES

*logistics information*

The dimensions of the pallets are given for most of the products as follows:

(A)	120 x 80 x 110 cm
(B)	120 x 80 x 120 cm
(C)	120 x 80 x 130 cm
(D)	120 x 80 x 140 cm
(E)	120 x 80 x 165 cm
(F)	120 x 80 x 195 cm

## general sales conditions

General sales conditions for export are as follows:

DELIVERY CONDITIONS: EXW Barcelona, Spain, for orders of less than 3,000 euros (Incoterms 2010)

FCA/FOB Barcelona, Spain, for orders of more than 3,000 euros (Incoterms 2010)

PAYMENT CONDITIONS: To be agreed upon.

DELIVERY TIMES: To be confirmed for each order.

MINIMUM ORDER One pallet per model.

MEDICLINICS S.A. reserves the right to modify and/or change the products and their specifications without prior notice.



## PRODUCT LIST

*list A-Z to make your  
search easier*

# PRODUCT LIST

CODE	PAG.
AC0083C	147
AC0780C	144
AC0950C	142
AC0956C	143
AC0957C	143
AC0959C	142
AC0961C	142
AC0962C	144
AC0963C	144
AC0964C	144
AC0966C	146
AC0967C	145
AC0970C	145
AC0973C	142
AC0974C	142
AC0976C	147
AC0978C	143
AC0979C	143
AI0010C	135
AI0010CS	135
AI0020C	131
AI0020CS	131
AI0030C	131
AI0030CS	131
AI0033C	140
AI0033CS	140
AI0036C	140
AI0036CS	140
AI0040C	131
AI0040CS	131
AI0050C	133
AI0050CS	133
AI0060C	132
AI0060CS	132
AI0070C	134
AI0070CS	134
AI0080C	134
AI0080CS	134
AI0090C	132
AI0090CS	132
AI0100C	134
AI0100CS	134
AI0110C	132
AI0110CS	132
AI0113C	139

CODE	PAG.
AI0113CS	139
AI0115C	136
AI0115CS	136
AI0118C	137
AI0118CS	137
AI0129C	139
AI0129CS	139
AI0140C	133
AI0140CS	133
AI0160C	133
AI0160CS	133
AI0170C	141
AI0184C	136
AI0184CS	136
AI0310C	138
AI0310CS	138
AI0320C	138
AI0320CS	138
AI0710C	136
AI0710CS	136
AI0720C	137
AI0720CS	137
AI0910C	141
AI0920C	99/135
AI0920CS	99/135
AI0968C	139
AI0968CS	139
AI0985C	137
AI0985CS	137
AIE310C	138
AIE310CS	138
AIE320C	138
AIE320CS	138
AM0100	160
AM0201C	160
AM0201CS	160
AM0251C	161
AM0251CS	161
AM0500	161
BA0130	158
BA0130CS	155
BAD090	156
BAD090CS	151
BAI090	156
BAI090CS	151

CODE	PAG.
BD0700	158
BD0700CS	155
BFD600	158
BFD600CS	154
BFI600	158
BFI600CS	154
BG0089CS	153
BG0800	157
BG0800CS	152
BG0850	157
BG0850CS	152
BG0900CS	152
BGA0820	157
BGA0820CS	153
BGC710	157
BGC710CS	152
BR0300	156
BR0300CS	151
BR0400	156
BR0400CS	151
BR0600	156
BR0600CS	151
BR0750	156
BR0750CS	151
BR0900	156
BR0900CS	151
BR1200CS	151
BS0010	157
BS0010CS	154
BSD020CS	153
BSI020CS	153
BTD090CS	155
BTI090CS	155
CP0016H	166
CP0016HCS	166
CP0016V	167
CP0016VCS	167
DBH100	99
DBH100C	99
DBH100CS	99
DCA100CS	98
DJ0010F	85
DJ0020F	85
DJ0031	81
DJ0037A	79

CODE	PAG.
DJ0037AB	79
DJ0037AC	79
DJ0037ACS	79
DJ0031B	81
DJ0031C	81
DJ0031CS	81
DJ0040	82
DJ0040B	82
DJ0040C	82
DJ0040CS	82
DJ0111C	83
DJ0111CS	83
DJ0112C	83
DJ0112CS	83
DJ0115C	84
DJ0115CS	84
DJ0160AS	80
DJ0252AC	80
DJE0010CS	87
DJF0032	81
DJF0038A	79
DJF0038AB	79
DJF0032B	81
DJF0038AC	79
DJF0038ACS	79
DJF0032C	81
DJF0032CS	81
DJFP035	86
DJFP035B	86
DJFP035C	86
DJFP035CS	86
DJP0034	86
DJP0034B	86
DJP0034C	86
DJP0034CS	86
DJS0033	81
DJS0033B	81
DJS0033C	81
DJS0033CS	81
DJSP036	86
DJSP036B	86
DJSP036C	86
DJSP036CS	86
DJT118	87
DT0208ACS	107

CODE	PAG.
DT0303	106
DT0303C	106
DT0303CS	106
DT2106	105
DT2106B	105
DT2106C	105
DT2106CS	105
DTE0020CS	107
DTE0030CS	126
DTE0050CS	126
DTES0040CS	125
DTH100	98
DTH100C	98
DTH100CS	98
DTP025CS	107
E05	43
E05A	48
E05B	43
E05AB	48
E05AC	48
E05ACS	48
E05C	43
E05CS	43
E85	44
E85A	44
E88	45
E88A	47
E88AB	47
E88AC	47
E88ACS	47
E88AO	46
E88C	45
E88CS	45
E88O	46
EP0300	163
EP0300CS	163
EP0350CS	162
EP0400CS	163
EP0450CS	162
ES0010C	146
ES0965C	135
ES0965CS	135
ES0968C	140
ES0968CS	140
FA0100CS	183

# PRODUCT LIST

CODE	PAG.
FAM110CS	183
FAM120CS	183
KIT 2789	94
KT0005	49
KT0005C	49
KT0005CS	49
KT009	34
KT009CS	34
KT0010	53
KT0010C	53
KT0010CS	53
KT0030CS	126
KT0040CS	125
KTP009	35
KTR100	171
M02A	51
M02AB	51
M02AC	51
M02ACS	51
M03A	52
M03AB	52
M03AC	52
M03ACS	52
M04A	61
M04AC	61
M04ACS	61
M06A	38
M06AB	38
M06AC	39
M06ACS	39
M09A	32
M09AB	32
M09AC	33
M09ACS	33
M14A	29
M14AB	29
M14ACS	29
M88APLUS	59
M88PLUS	59
M99A	57
M99AC	57
M99ACS	57
PP0006	116
PP0006C	116
PP0006CS	116

CODE	PAG.
PP0065	113
PP0065C	113
PP0065CS	113
PP0080	113
PP0080C	113
PP0080CS	113
PP0104CS	141
PP0162C	141
PP0162CS	141
PP1065	114
PP1065C	114
PP1065CS	114
PP1080	114
PP1080C	114
PP1080CS	114
PP1303	117
PP1303C	117
PP1303CS	117
PP1305	117
PP1305C	117
PP1305CS	117
PP1312	117
PP1312C	117
PP1312CS	117
PP1321	117
PP1321C	117
PP1321CS	117
PPA2279	115
PPA2279B	115
PPA2279C	115
PPA2279CS	115
PPE0010CS	116
PR0700CS	96
PR0781	96
PR0781C	96
PR0781CS	96
PR0789	95
PR0789C	95
PR0789CS	95
PR2783	93
PR2783B	93
PR2783C	93
PR2783CS	93
PR2784	97
PR2784B	97

CODE	PAG.
PR2784C	97
PR2784CS	97
PR2787	94
PR2787B	94
PR2787C	94
PR2787CS	94
PS0001CS	187
PS0002CS	187
PS0003CS	187
PS0004CS	187
PS0005CS	187
PS0006CS	187
PS0007CS	187
PS0008CS	187
PS0009CS	187
PS0010CS	187
SC0004	71
SC0009	70
SC0009CS	70
SC0010	72
SC0010CS	72
SC0020	72
SC0020CS	72
SC0030	73
SC0030CS	73
SC0040	73
SC0087	71
SC0088	71
SC0088H	69
SC0088HCS	69
SC1088HT	69
SC1088HTCS	69
SN0027C	171
SN0027CS	171
SN0031C	171
SN0031CS	171
SN0036C	171
SN0036CS	171
SN0105C	177
SN0105CS	177
SN0108C	177
SN0108CS	177
SN0110C	177
SN0110CS	177
SN0200CS	172

CODE	PAG.
SN0300CS	172
SN0700CS	175
SN0800CS	175
SNLM35C	174
SNLM35CS	174
SNLM36CS	173
SNLM38CS	173
SNLM42CS	173
SNLM44CS	172
SNPT01C	178
SNPT01CS	178
SNR027C	171
SNR027CS	171
SNR031C	171
SNR031CS	171
SNR036C	171
SNR036CS	171
SNU104C	176
SNU104CS	176
SNU106C	176
SNU106CS	176
SNU108C	176
SNU108CS	176
TP0130	178
TP0135	178
UCEN0200A	123
UCEP0185A	124
UCEP0130A	124

**NEW  
PRODUCT**







**LOW TRAFFIC**  
This model is suitable for installation in areas with low traffic.



**MEDIUM TRAFFIC**  
This model is suitable for installation in areas with medium traffic.



**HIGH TRAFFIC**  
This model is suitable for installation in areas with high traffic.



**ELECTRICAL PROTECTION**  
This model incorporates elements that ensure electrical insulation.



**LOW ELECTRICITY CONSUMPTION**  
**Eco-efficient hand dryer** with low electricity consumption/high energy savings.  
**Hairdryer** with low electricity consumption/high energy savings.



**VALUE FOR MONEY**  
This model offers excellent value for money.



**VANDAL-PROOF**  
This model incorporates elements or features that make it difficult or impossible to damage or remove.



**LOCK WITH KEY**



**NUTS AND BOLTS INCLUDED**  
This model includes the nuts and bolts necessary for it to be installed on masonry walls.



**FLANGE COVER FOR CONCEALED MOUNTING**  
Grab bars and accessories with a hidden mounting system, the assembly plate being concealed by the flange cover.



**BIOCOTE**  
Anti-microbe treatment for Dualflow Plus hand dryers



**ADA STANDARD**  
Model which, when installed correctly, complies with the Accessibility Guidelines for Buildings and Facilities ADAAG (USA).



**UNE STANDARD**  
Model which, when installed correctly, complies with the Standard for Accessibility in Buildings, Hygienic and health spaces UNE 41523.



**10 UNITS PER BOX**  
Unit quantities per box.



(A)

**100 UNITS PER PALLET**  
Unit quantities per pallet. The type of pallet is in between brackets, which has its meaning in page198.

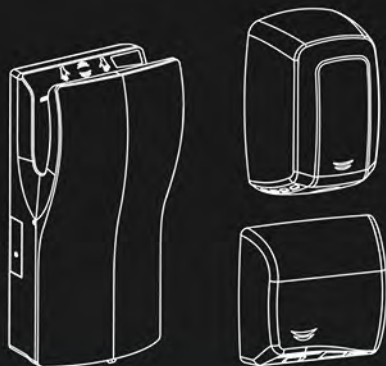
# mediclinics

www.mediclinics.com  
skype: mediclinics

MEDICLINICS S.A. (Spain)  
Industria, 54  
08025 Barcelona  
Tel: +34 93 446 47 00  
Fax: +34 93 348 10 39  
e-mail: export@mediclinics.com  
www.mediclinics.com

SANIFLOW CORPORATION (USA)  
3325 NW 70th Avenue,  
MIAMI, Florida 33122 - USA  
Tel: +1 (305) 424 24 33  
Tdl-free: +1 (877) 424 24 35  
e-mail: info@saniflowcorp.com  
www.saniflowcorp.com

MEDICLINICS (Italy)  
Via Senigallia 18/2 Torre A  
c/o Regus Piano 5  
20161 Milano  
Tel: +39 02 646 722 20  
Fax: +39 02 646 724 00  
e-mail: info@mediclinics.it  
www.mediclinics.it



www.mediclinics.com