


**Range:** Ergonomic Mixer taps

**Ref:** 60051 - Mixer tap with short spout - 170mm long control lever

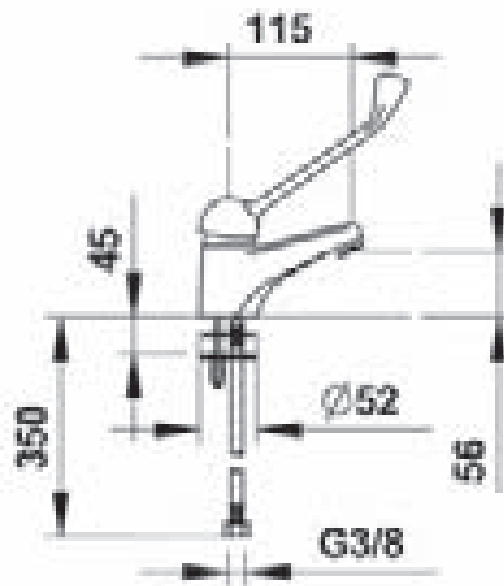

**> Flow rate :**

- 8 l/mn at 3 bar until the halfway stop (flow rate limit on the ceramic cartridge)
- Anti-scale M24x100 laminar straightner to ensure no air in the water-jet

**> Hydraulic supply :**

- G 3/8" (12x17)

**> Material and colour finish :**

- Chromed brass body Ø40 ceramic disc cartridge

**> Thermal resistance :**

- Resist up to 75°C temperature during a 30mins period (thermal shock disinfection protocol)

**> Security :**

- Temperature limiter on the ceramic cartridge
- 2 PEX flexible hoses (L :350) with M3/8 swivel nuts
- Joint designed to resist thermal and chemical disinfection shock

**> Ergonomics :**

- 170mm long control lever

**> Delivered with :**

- Instruction manual
- Fixing element with D35 Bolt

**> Standards & approvals :**

- Compliant to NF EN 817
- ACS

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

