

## Wall-to-floor support rail


### Suggested text for specifications:

Wall-to-floor support rail in stainless steel, tube diameter 32 mm, satin or structured finish, TÜV-certified, CE-marked, supports weight up to 125 kg, concealed fixings by self-locking roses, includes mounting components.

Length ..... x ..... mm


Surface .....

Article No. BF 660

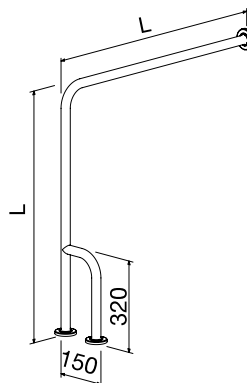

	Satin	Structured
Dimensions	ID number	ID number
850 x 850 mm right	660 100	660 110
900 x 900 mm right	660 101	660 111
850 x 850 mm left	660 200	660 210
900 x 900 mm left	660 201	660 211

## Hinged support rail

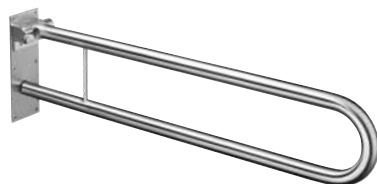


### Suggested text for specifications:

Hinged support rail in stainless steel, individually adjustable brake, full metal hinge in stainless steel, tube diameter 32 mm, satin or structured finish, wall plate 90 x 250 mm, TÜV-certified, CE-marked, supports weight up to 125 kg, concealed fixings.

Length ..... mm

Surface .....

Article No. BF 670

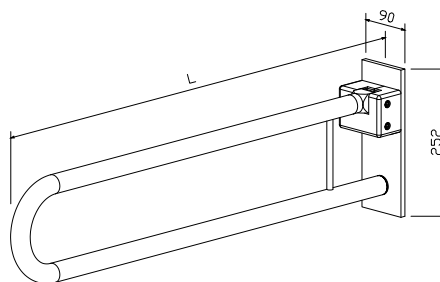

	Satin	Structured
Dimensions	ID number	ID number
600 mm	670 100	670 110
700 mm	670 200	670 210
850 mm	670 300	670 310

Options: Mounting sets for various kinds of walls on site.

