

Area of Application:
Wall mounted
Special water

Max working pressure 10bar at 20°C / 6bar at 65°C
Temperature range 5°C-65°C

Details:
Diaphragm headwork, open/close 1,5x360°
3-Zone colour. acc. to EN13792:2002


Removable nozzle

Materials in media contact:
Rubber, EPDM
PVDF
PTFE

Mounting:
1/2" nut with locking pins, O-ring and washer (See 94G0232)

Inlet / outlet connection:
ISO 7/1 - R3/8"
DIN 12 898 hose nozzle


Metal handle

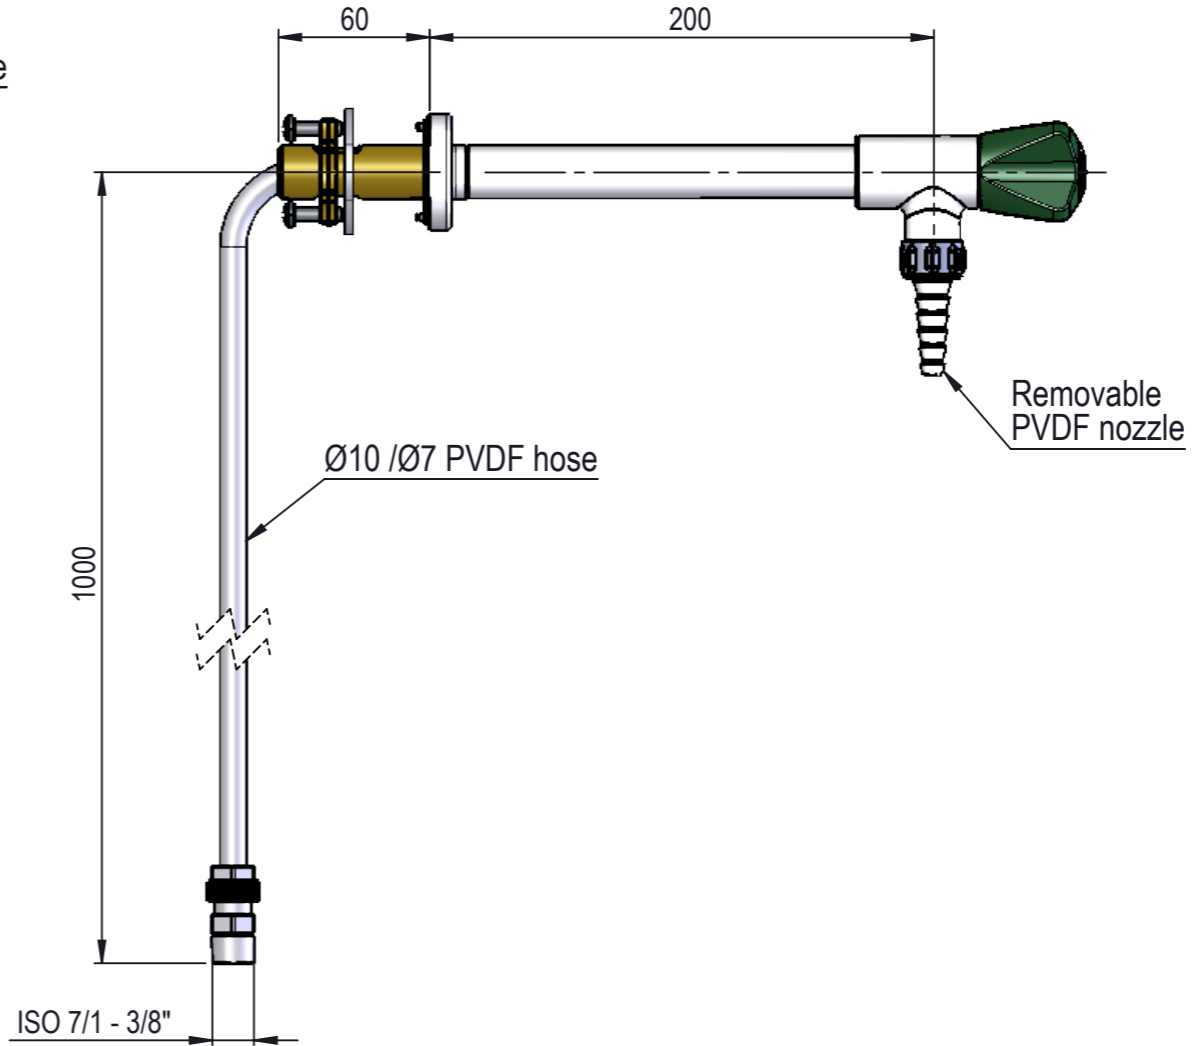

Removable PVDF nozzle

Ø10 /Ø7 PVDF hose

ISO 7/1 - 3/8"

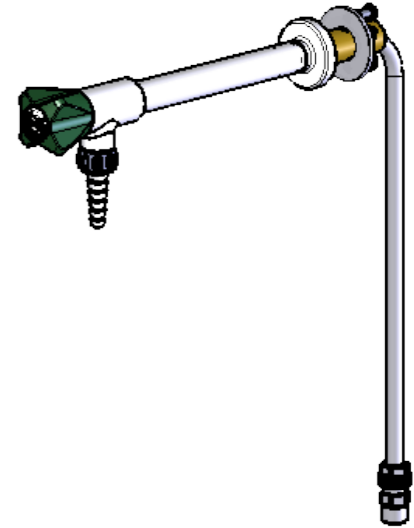

MEDIA CODE XX FOR SPECIAL WATER
ONE MEDIA FITTING
*Model shown for WDI

Media	Media description	Media code XX
WDI	Distilled water	03
WDC	Demineralized water	36

Description: 1-Valve, Wall mounted, 1-Hole, ,							Media: Special water				
							Comments:				
							Drawing type: Customer drawing				
							Weight: 0.839 Kg				
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by:	Drawn by: BJP	Released on TM No.	Date (DD-MM-YY): 20-08-2013	
BROEN-LAB							Format: A3		Drawing No.: 253303510XX-09		
This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.											