

Area of Application:  
 Wall  
 Water  
 Min. working pressure 1 bar  
 Max. working pressure 10 bar  
 Min. temperature 5°C  
 Max. temperature 80°C


Details:  
 Check Valve  
 flowfix 14 L/min  
 45° Duo Cup

Materials in media contact:




PA  
 SS, AISI 316  
 Rubber, EPDM  
 POM  
 TPE  
 Materials not in media contact: PP, PA, SEBS

Mounting:



Inlet / outlet connection:  
 Union Nut G1/2"  
 Easy to Clean Spray Head(s)

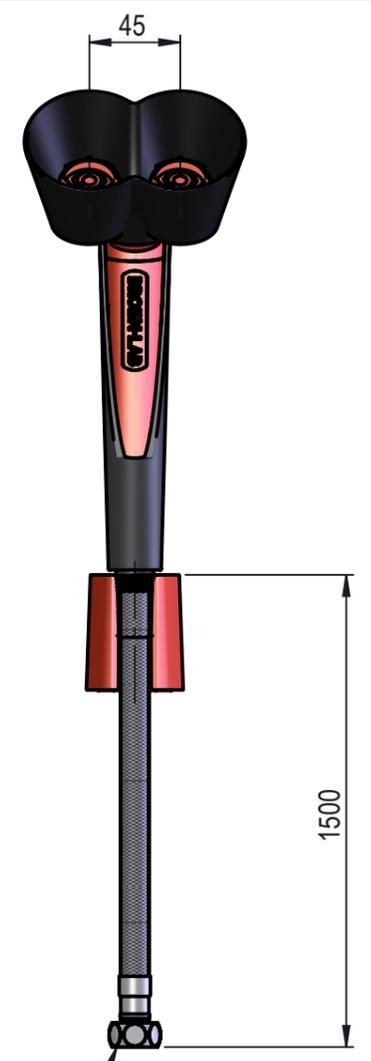

ISO 228/1- G1/2 Union nut included gasket

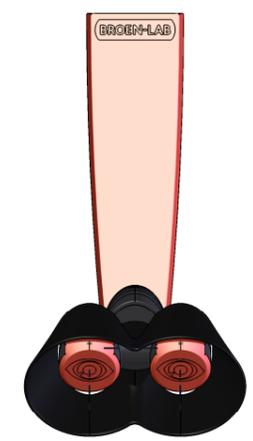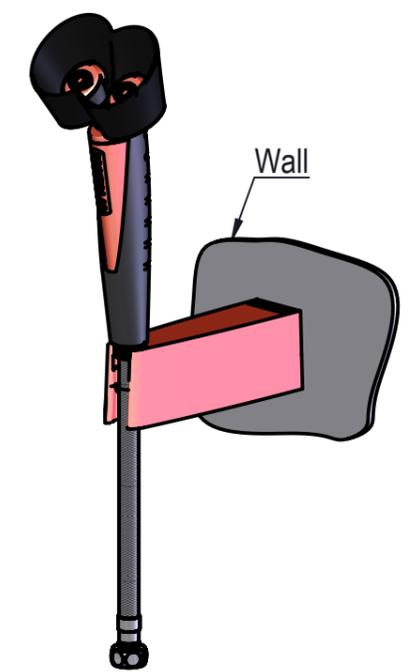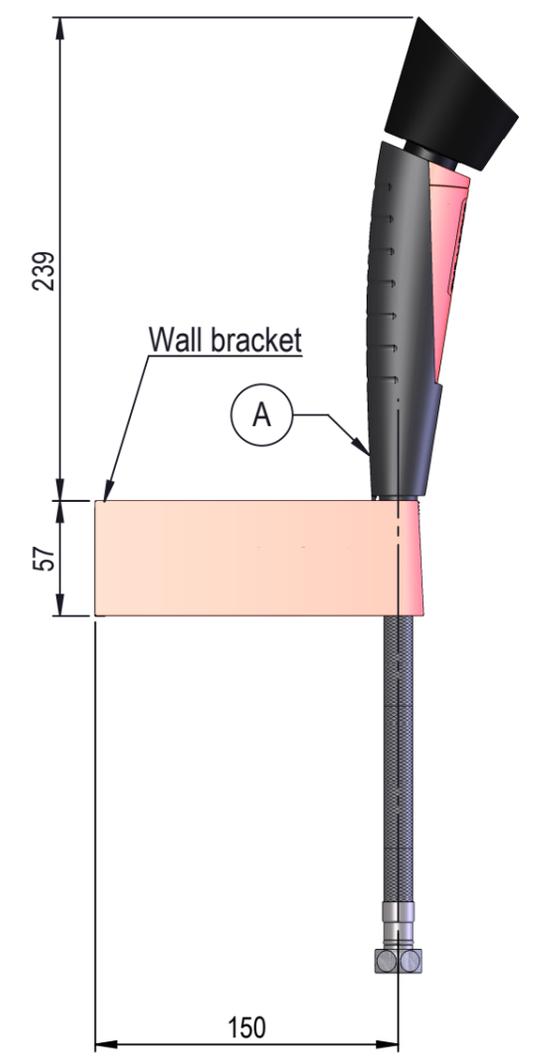

17001970  
 Signs - instructions



NOTE A: EN label 94G0122

Description:	
Media:	Water
Material:	
Specification:	
Comments:	
Drawing type:	Customer drawing
Weight:	0.546 Kg
All dimensions made with  are inspection dimensions	
Unspecified linear tolerances:	Unspecified angular tolerances:
Designed by:	JAK
Drawn by:	BJP
Released on TM No.:	
Date:	17-07-13
Format:	A3
Drawing No.:	27100091003011

Rev.	Pos.	Date	TM No.	Design by	Drawn by	Change:

**BROEN-LAB**  
 This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S

