

FROSTLINE®



INDUSTRIAL WATER TAP

INDUSTRIAL WATER TAP

1" VA approved frost proof water tap in stainless steel with 3/4" tapping developed for water supply on farms, washing down areas, recycling depots, church yards etc.

Delivered complete with well.

The water tap is provided with a patented self-emptying 3-way sliding valve insuring that the tap remains frost proof even at hard freezing temperatures.

PRODUCT

Designation: 1" frost proof industrial water tap
Tapping: 3/4" socket pipe thread
Connection: 1" nipple pipe thread

INSTALLATION DIMENSIONS

Tapping height: 720mm
Pipe stand height: 844mm
Total height: 1746mm
Well: D 160 x 900mm

SHIPPING

H x D: 1840mm x D176mm
weight: 8,5kg

VALVE

FROSTLINE® self-emptying sliding valve
Capacity: 34-48 l/min. at 2-4 bar
Connection pressure: 2-6 bar

INSTALLATION


Bury the water tap at 900mm depth and connect to the water supply using 1" fittings.
Place pebbles and gravel (not sand) in a diameter at 20-30cm and at a depth of approx. 50 cm around the water tap drain.

SERVICE

The seals can be replaced without digging up the water tap. Unscrew the spindle housing from the top of the pipe stand, then pull up the full length of the spindle. Replace the seals at the valve plunger.

OPERATION OF THE VALVE

The water tap is provided with a 3-way self-emptying sliding valve. When the water tap is not in use, the valve and riser pipe are emptied of water that might otherwise freeze. The water tap and thus the valve and riser pipe are frost-proof as long as the water supply line for the tap does not freeze.

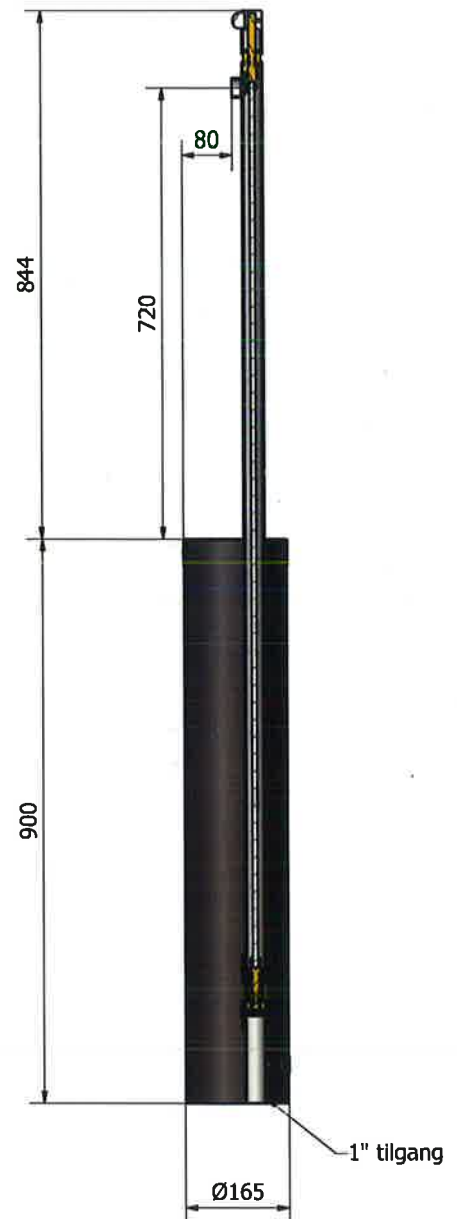

VVS no.: 74.34.83.108
Product no: F802

GDV-approval no.: 04/00116