


TECHNICAL DATA SHEET

PRESTO®

Range: Spout

Ref: 30901 - Short spout without water retention for washbasin - Cross partition

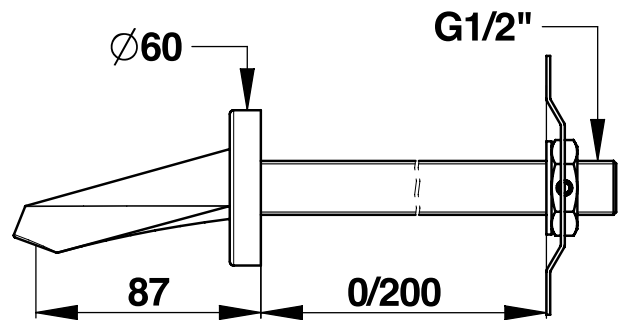

> Working pressure :

- 1 to 5 bar

> Flow :

- Full flow straightener
- Water flow depending on the chosen tapware

> Functionality :

- Wall-mounted chrome-plated brass spout without water retention

> Hydraulic supply :

- M G 1/2" (15x21) with threaded spigot for cross-partition installation from 1 to 200mm

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Delivered with :

- 1 suitable gasket
- 1 rose
- 1 flow straightener
- 1 nut

> Standards & approvals :

- Brass body and component in accordance with EN 1982/CC754S, NF EN 12164/CW614N, NF EN 12165/CW617N
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

