


# TECHNICAL DATA SHEET

# PRESTO®

Range: PRESTOTEM 2

Ref: 88804 - Shower panel with timed flow PRESTO 50 and thermostatic mixer tap, anti-legionella

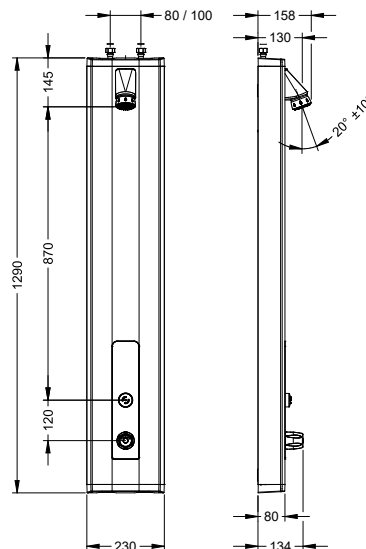

## > Working pressure :

- 1 to 5 bar

## > Flow :

- 6 l/min with integrated flow limiter
- Anti-water-hammering device
- Fixed shower head with anti-limescale spikes

## > Flow time :

- 30 seconds (± 5 sec.)

## > Hydraulic supply :

- G 1/2" (15x21), top or rear water inlet. For rear water inlet, we recommend to add the adaptation kit under the reference 91026
- On P 50 tap NF II and thermostatic mixer tap EN 1111 (NF check valves)

## > Material :

- Anodised aluminium extruded section (2.5mm thickness)
- Aluminium removable valve plate, painted RAL 7005 colour
- High resistance RAL 7005 coloured ABS casings

## > Functioning:

- Wide opening panel without the need to dismantle from the wall and shower taps on a removable valve plate

## > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

## > Security :

- "Legionella" version: pre-equipped for PRESTO solutions
- Anti-scald system: flow is immediately stopped if the cold water is cut off
- Maximum delivered temperature : pre-fixed at 38°

## > Delivered with :

- 1/2" hoses with revolving nuts
- MM 1/2" (15x21) straight stop valve and 250 micron filters
- Fastening screws and instruction manual

## > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540



- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227