


TECHNICAL DATA SHEET

PRESTO®

Range: Outdoor shower column

Ref: 29910 - PRESTO S4

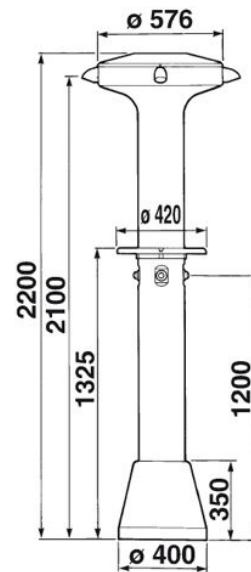

> Working pressure :

- From 2 to 5 bar

> Flow rate :

- 10 l/min at 3 bar by integrated flow rate limiter
- Anti-water-hammering design

> Flow time :

- 20 seconds (± 5 sec.)

> Hydraulic supply :

- Femelle G 3/4" (20x27) on stop-valve
- On 4 special P12A shower single taps and 4 shower heads (29301)

> Material and colour finish :

- High density polyethylene body with gel-coating and blue colored in the mass, UV resistant.
- Nickel-chrome plated on brass body and components

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Non rotating knob avoiding premature wear

> Delivered with :

- Wood packaging (reusable for winter storing)
- 1 stop valve with female 3/4" purge (20x27)
- Hoses
- Instruction manual

> Standards & approvals :

- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

