
TECHNICAL DATA SHEET



Range: Thermostatic mixer for shower

Ref: 52358 - PRESTO 9400 TE



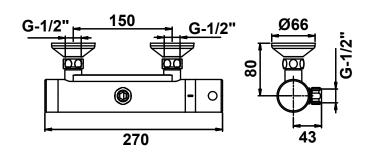

> Working pressure:

• 0.5 to 5 bars

> Flow:

• 8 l/mn at 4 bar with flow regulator

> Working:

• Water flow activation whenever hands are detected and automatically shuts off (12 s) after the user left

> Hydraulic supply:

- 3/4" nut and 3/4" 1/2" eccentric connector
 Adjustable center distance from 130 to 170mm, preset at 150mm

> Power supply:

9V lithium battery

> Material and colour finish:

· Chrome treatment

> Thermal resistance:

• 0 to 65°C

> Safety:

- Anti-scalding: with temperature limiter
 In case of cold water cut-off, flow will immediately stop

> Delivered with:

- 1 eccentric connector G1/2" 30mm
- 1 thermostatic mixer1 installation manual

> Standards and approvals:

- Molded chrome-plated body in accordance with EN 12540
 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227















