


TECHNICAL DATA SHEET

PRESTO®

Range : Single wall-mounted tap - PRESTOGREEN RANGE

Ref : 63005 - PRESTO 504 - cold water

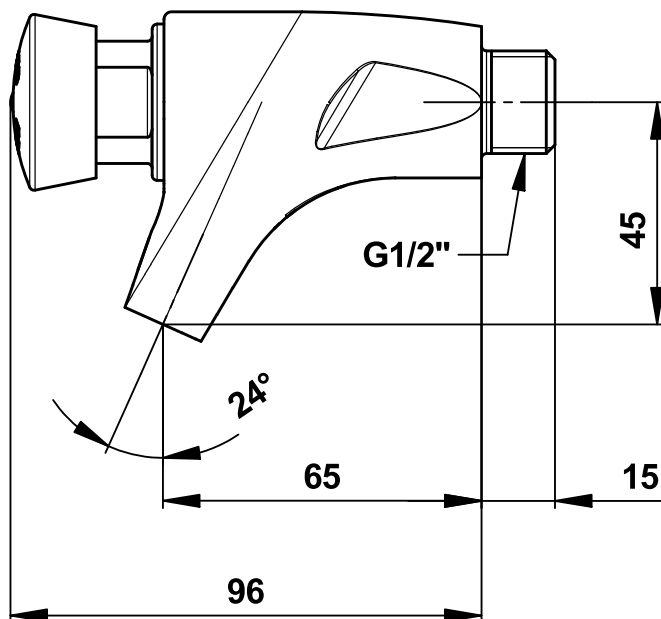

> Working pressure :

- 1 to 5 bar

> Flow :

- 3 l/min at 3 bar - 4-position flow adjustment device
- Anti-water-hammering design

> Flow time :

- 7 seconds

> Hydraulic supply :

- M G 1/2" (15x21) - Cold water

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Interchangeable head and anti-rotation push-button
- Non-removable, wear-proof coloured marker

> Delivered with :

- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227



This document is not contractual. We reserve the right to modify the characteristics of our products without notice in advance. All our brands and models are registered trade marks.