


# TECHNICAL DATA SHEET

**PRESTO®**

**Range:** Single wall-mounted tap  
**Ref:** 63200 - PRESTO 507 - high-flow tap - cold water

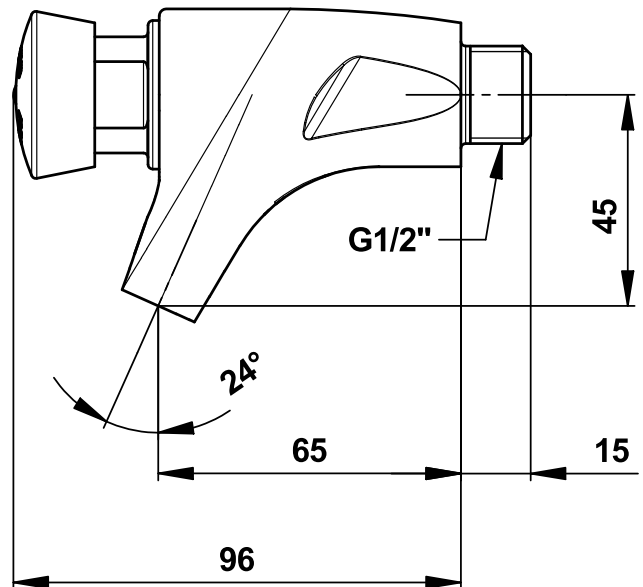

## > Working pressure :

- 1 to 5 bar

## > Flow :

- 18 l/min at 3 bar - 4-position flow adjustment device
- Anti-water-hammering design

## > Flow time :

- 4-8 seconds

## > Hydraulic supply :

- M G 1/2" (15x21) - Cold water

## > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

## > Security :

- Interchangeable head and anti-rotation push-button
- Non-removable, wear-proof coloured marker

## > Delivered with :

- Instruction manual

## > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

