


# TECHNICAL DATA SHEET

# PRESTO®

Range: PRESTO CHEF - Professionnal Kitchen range

Ref: 70830 - « Mini » Column –deck-mounted mixer -rinsing head

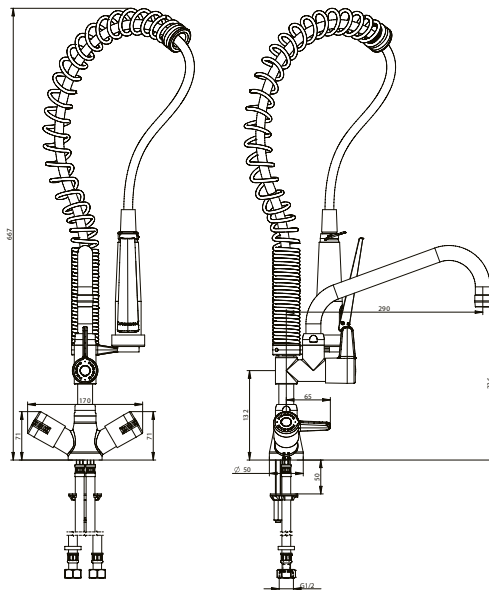

## > THE PRODUCT BENEFITS

- "Mini" format particularly suitable for small spaces: space saving
- Resistant to intensive use
- Spring flexibility
- Ergonomic hand shower with continuous flow function, and gripping surface limiting the risk of burns
- Fast filling of tanks: 30L / min at 3 bar
- Reinforced body / column interface
- Intuitive and ergonomic knobs: easy grip
- Product design
- Adjustable wall support
- Locking hook to avoid MSD (musculoskeletal disorder)
- 1/4 turn ceramic head tap with filling spout 290 mm projection - adjustable
- Easy maintenance: presence of a slot under the red / blue pad allowing the passage of a screwdriver
- Ease of maintenance: availability of all spare parts
- Flow straightener to channel water and avoid lateral water splashes

## > Dimensions:

- Overall height: 667 mm

## > Model:

- Single-turn mixer with ceramic head 1/4 turn with flow rate of 30L / min at 3 bar
- 1/4 turn ceramic head tap with filling spout 290 mm projection - adjustable
- Black hand shower M 1/2 " with grip surface limiting the risk of burns
- Shower flow: 12L / Min (regulated) - User adjustable jet: concentrated or wetting - Anti-tartar spray nozzle - Locking hook for continuous flow - integrated NF check valve
- Interchangeable anti-tartar flow straightener
- Guide spring for stainless steel hose
- Adjustable wall support, can be cut from 60 to 200 mm (from column to wall)
- Adjustable shower holder on the left or right

## > Recommended working pressure:

- 1 to 5 bars

## > Flow rate:

- 30L / min at 3 bar

## > Hydraulic supply:

- G 1/2 " (15x 21)

## > Material and color of finish:

- Body, spout and column in chromed brass
- Material compliant with the "UBA" list

## > Thermal resistance :

- Withstands a temperature of 75 ° C for 30 minutes (in the context of thermal shock).

## > Delivered with :

- 1 fixing bracket
- 2 PEX flexible hoses with stainless steel braided nut G1 / 2 " Lg 660 mm with non-return valves NF
- 2 filters
- 1 stainless steel braided hose (hand shower) surrounded by a PVC sheath, resistant to temperatures up to 90 ° C. Continuous operating temperature at 70 ° C maximum

