


TECHNICAL DATA SHEET



Range : Knee operated taps for washbasin

Ref : 31683 - PRESTO 712 Knee operated tap

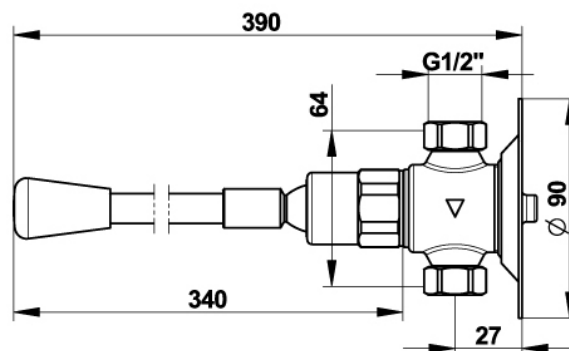

> Working pressure :

- 1 to 5 bar

> Flow :

- 3 l/min at 3 bar - 4-positions flow adjustment device
- Anti-water-hammering design

> Flow time :

- 15 seconds (\pm 5 sec.)

> Operation :

- Knee operated through action on the omnidirectional control (flexible trigger)

> Hydraulic supply :

- Either with hot, cold or mixed temperature water. MG $\frac{1}{2}$ (15x21) Inlet and outlet

> Thermal resistance :

- Resistant to a temperature of 75°C for 30 minute thermal shock

> Security :

- Non-removable, wear-proof red or blue marker

> Delivered with :

- 1 Gasket nut
- 1 Coupling nut
- 1 non return valve
- 1 Nut for 12x14 pipe
- 2 colored marker (Red and blue)
- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- Acoustic class II

