
TECHNICAL DATA SHEET



Range: Deck-mounted mixer tap

Ref: 28610 - PRESTO 4000 S single control mixer tap



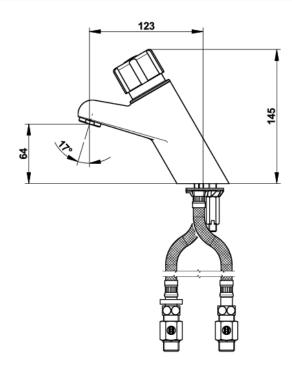

> Working pressure :

1 to 5 bar

> Flow:

- 3 l/min with integrated flow limiter
- Anti-water-hammering design
- Vandalism proof and anti-clogging spout

> Flow time:

15 seconds (± 5 sec.)

> Hydraulic supply:

G 3/8" (12x17)

> Material and colour finish:

Chrome-plated pushbutton

> Thermal resistance :

Resistant to a temperature of 75°C for 30 minute thermal shock

> Security:

- Adjustable tamper-proof temperature limiter to prevent scalding
- Patented anti-blocking "S" system to avoid the water to flow continuously

- > Delivered with : 2 MM 3/8" stop valves
 - 2 Filter gaskets
 - 2 PEX hoses with NF check valves and nuts
 - Fixing bracket
 - 1 Flange gasket
 - 1 Brass clamping nut
- Instruction manual

> Standards & approvals :

- Acoustic class I
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- Brass body in accordance with EN 1982, EN 12164, EN 12156



















