


**Range:** Shower heads

**Ref:** 29255 - Wall mounted shower head with anti-limescale spikes with directional grid

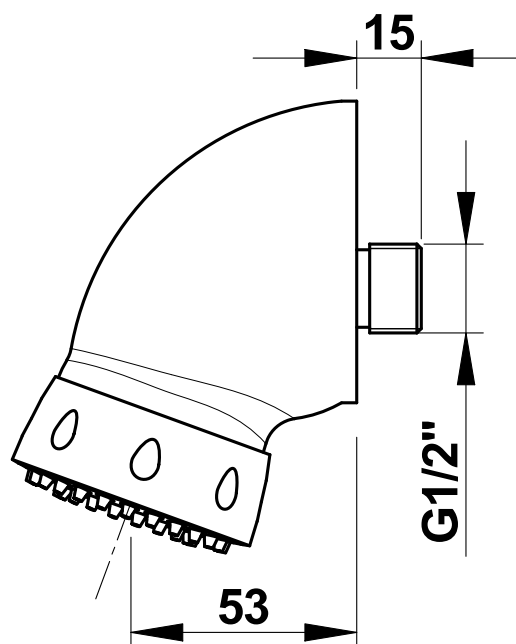

**> Working pressure :**

- 1 to 5 bar

**> Flow :**

- 6 l/min with integrated flow limiter

**> Functionality :**

- Simple rain spray
- Anti-Limescale spikes
- Fixed shower head with directional grid

**> Hydraulic supply :**

- M G 1/2" - Threaded length 15 mm

**> Thermal resistance :**

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

**> Delivered with :**

- Instruction manual

**> Standards & approvals :**

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

