

Ceramic Urinal with the Radar Flushing Unit SLP 19RS




SLP 19 - GOLEM

Characteristics



- economy flushing by 1 liter of water
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 to 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

Installation Drawing

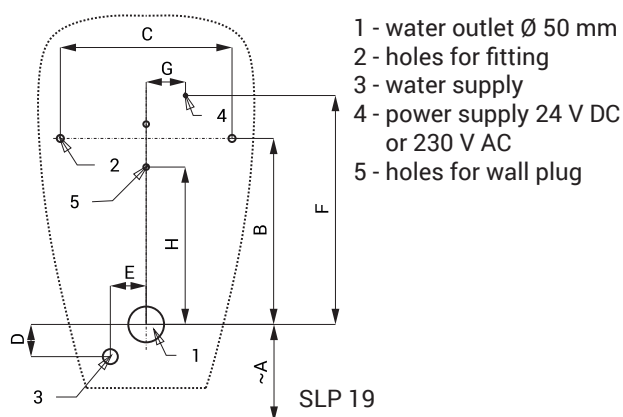

Dimensions (mm)	A	B	C	D	E	F	G	H	I
SLP 19 - GOLEM	400	260	240	45	50	320	55	220	

* for the height of the front edge of the urinal 650 mm above the floor

Technical Specification

Operating voltage

- SLP 19RS 24 V DC
- SLP 19RZ 230 V AC/50 Hz
- SLP 19RB 6 V

Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

Recommended flow pressure

0,1 - 0,6 MPa

Rate of flow

18 l/min (inf. data)

Water inlet

male thread G 1/2"

Water outlet

inlet fitting with a rubber sealing



SLA 11




SLA 11A



SLA 11B



SLA 11C



SLA 26

Supply Specification

- SLP 19RS - Supply No. 11195 ceramic urinal with radar flushing unit on the mounting rail, electromagnetic valve, connecting hoses, angle valve with filter and check valve, inlet fitting with a rubber sealing, siphon, mounting set, paper drill template, power supply (SLP 19RZ), 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 19RB)
- SLP 19RZ - Supply No. 01195
- SLP 19RB - Supply No. 11197

Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units
- SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
- SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
- SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
- SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
- SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
- SLD 04 - Supply No. 07040 remote control for an adjustment of parameters
- SLA 11 - Supply No. 06110 deodorising urinal screen - orange, mango scent
- SLA 11A - Supply No. 06111 deodorising urinal screen - red, kiwi and grapefruit scents
- SLA 11B - Supply No. 06112 deodorising urinal screen - transparent, honeysuckle scent
- SLA 11C - Supply No. 06113 deodorising urinal screen - blue, cotton bloom scent
- SLA 26 - Supply No. 06260 stainless steel sieve for urinal Golem
- SLR 01L - Supply No. 08015 mounting frame to the plasterboard for the urinal with radar flushing unit on the mounting rail
- SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)