

# Ceramic Urinal with the Radar Flushing Unit SLP 27R




SLP 27 - Roca - Chic

## Characteristics



- economy flushing by 1 liter of water
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

## Installation Drawing

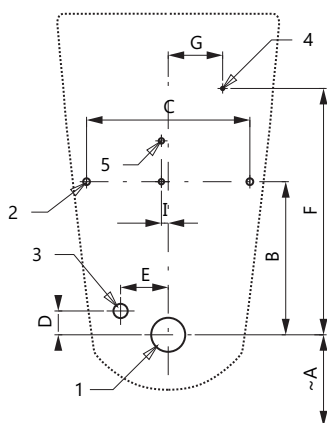

- 1 - water outlet Ø 50 mm  
2 - holes for fitting  
3 - water supply  
4 - power supply 24 V DC or 230 V AC  
5 - holes for wall plug

Dimensions (mm)	A	B	C	D	E	F	G	I
SLP 27 - CHIC	475	225	240	35	70	360	80	10

\* for the height of the front edge of the urinal 650 mm above the floor

## Technical Specification

### Operating voltage

- SLP 27R 24 V DC
- SLP 27RZ 230 V AC/50 Hz

### Power input

- operating by 24 V DC 8 W

### Recommended flow pressure

- 0,1 - 0,6 MPa

### Rate of flow

- 18 l/min (inf. data)

### Water inlet

- male thread G 1/2"

### Water outlet

- inlet fitting with a rubber sealing



## Supply Specification

- SLP 27R - Supply No. 01274  
SLP 27RZ - Supply No. 01275

ceramic urinal with the radar flushing unit on the mounting rail, electromagnetic valve, connecting hoses, angle valve with filter and check valve, inlet fitting with a rubber seal, siphon, paper drill template, power supply (SLP 27RZ)

## Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units  
SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units  
SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units  
SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units  
SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units  
SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit  
SLD 04 - Supply No. 07040 remote control for an adjustment of parameters  
SLA 11 - Supply No. 06110 deodorising urinal screen - orange colour, mango scent  
SLA 11A - Supply No. 06111 deodorising urinal screen - red colour, kiwi and grapefruit scent  
SLA 11B - Supply No. 06112 deodorising urinal screen - transparent colour, honeysuckle scent  
SLA 11C - Supply No. 06113 deodorising urinal screen - blue colour, cotton bloom scent  
SLR 01L - Supply No. 08015 mounting frame to the plasterboard for the urinal with radar flushing unit on the mounting rail