

Ceramic Urinal with the Radar Flushing Unit SLP 49RS




SLP 49 - CAPRINO PLUS

Characteristics



- **economy flushing by 1 liter of water**
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 04 without the necessity to dismantle the urinal from the wall (acoustic setting indication)
- automatic flushing after each 6 hours non-use
- monitoring of battery capacity (for models with index B)
- possibility to regulate a water flow by the ball valve
- radar flushing unit recharges a water to the siphon after each flushing

Installation Drawing

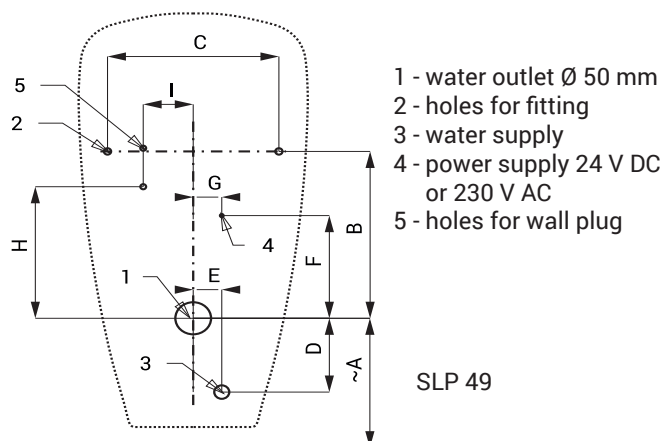

Dimensions (mm)	A	B	C	D	E	F	G	H	I
SLP 49 - CAPRINO PLUS	400	260	240	115	40	160	40	205	70

* for the height of the front edge of the urinal 650 mm above the floor

Supply Specification

- SLP 49RS - **Supply No. 11495** ceramic urinal with the radar flushing unit on the mounting rail, electromagnetic valve,
SLP 49RZ - **Supply No. 01495** connecting hoses, angle valve with filter and check valve, inlet fitting with a rubber
SLP 49RB - **Supply No. 01491** sealing, siphon, mounting set, paper drill template, power supply (SLP 49RZ),
4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 49RB)

Recommended Accessories

- SLZ 01Y - **Supply No. 05012** power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z - **Supply No. 05011** power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y - **Supply No. 05042** power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z - **Supply No. 05041** power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X - **Supply No. 10049** power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06 - **Supply No. 05060** power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04 - **Supply No. 07040** remote control for an adjustment of parameters
SLA 11 - **Supply No. 06110** deodorising urinal screen - orange colour, mango scent
SLA 11A - **Supply No. 06111** deodorising urinal screen - red colour, kiwi and grapefruit scent
SLA 11B - **Supply No. 06112** deodorising urinal screen - transparent colour, honeysuckle scent
SLA 11C - **Supply No. 06113** deodorising urinal screen - blue colour, cotton bloom scent
SLR 01L - **Supply No. 08015** mounting frame to the plasterboard for the urinal with radar flushing unit on the mounting rail
SLA 36 - **Supply No. 06360** set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)

Technical Specification

Operating voltage

- SLP 49RB 6 V
- SLP 49RS 24 V DC
- SLP 49RZ 230 V AC/50 Hz

Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

Recommended flow pressure

0,1 - 0,6 MPa

Rate of flow

18 l/min (inf. data)

Water inlet

male thread G 1/2"

Water outlet

inlet fitting with a rubber sealing



SLA 11



SLA 11A



SLA 11B



SLA 11C