# **FROSTLINE®**



## **FROSTLINE®**

### DUO H 30 WATER TAP

½" frost-proof water tap made from glass peened stainless steel. This water tap is particularly suitable for public parks and facilities, golf courses, camping sites and other areas with a need for reliable water supply all year round. The water tap is supplied complete with well.

The water tap is fitted with a self-emptying 3-way sliding valve, ensuring that the tap remains frost-proof, even at hard-freezing temperatures. The seals can be replaced without digging up the well. Unscrew the spindle housing from the top of the pipe stand, then pull up the spindle and replace the O-rings.

Is the product to be placed in an area with a high environmental impact, including sea fog, it is recommended to choose a special design i.e. an electro polished surface.

**PRODUCT** 

Designation: ½" frost-proof water tap for outdoor installation

Tapping: ½" nipple pipe thread Connection: ¾" nipple pipe thread

#### INSTALLATION DIMENSIONS

Tapping height: 760 mm
Tapping depth: 155 mm
Pipe stand height: 900 mm
Height of handle: 795 mm
Height of spout: 900 mm

#### PRODUCT DIMENSIONS

 Overall height:
 1,820 mm

 Overall width:
 166 mm

 Well:
 D160 x 900 mm


SHIPPING

Dimensions, H-W-D: 1,840 x 200 x 300 mm Weight: 10.5 kg complete with well

VALVE FROSTLINE® self-emptying sliding valve

Capacity: 28-32 l/min. at 2-4 bar
O-rings: 8 x 3 mm NBR - shore 70

-			
	MODELS		
	F101	74.34.80.334	Duo H 30 Water Tap
	F101-1	74.34.85.334	Duo H 30 w/automatic closing
	F121	74.34.80.344	Duo H 9 Water Tap
	F121-1	74.34.85.344	Duo H 9 w/automatic closing
	ACCESSORIES	S	
	F500	74.34.98.020	LUNA Rinse Bowl D250
	F510	74.34.80.926	Duo Well Ring D60
	F520	74.34.89.936	Blocking tube H
ı	F530	74.34.89.916	Quick coupling - stainless steel
ı	F921	74.34.89.004	Extension hose 300mm w/fittings
	1		

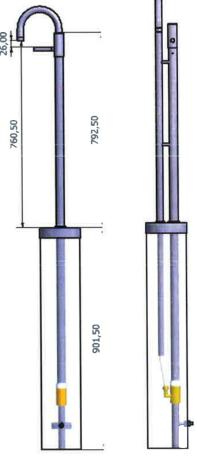

GDV-godkendelse nr.: 04/00116

#### OPERATION OF THE VALVE

The water tap is provided with a 3-way self-emptying sliding valve. When the water tap is not in use, the valve and riser pipe are emptied of water that might otherwise freeze. The water tap and thus the valve and riser pipe are frost-proof as long as the water supply line for the tap does not freeze.



Duo w/Rinse Bowl and Well Ring

2008