

# FROSTLINE®



CLASSIC WATER TAP



## CLASSIC 23 G WATER TAP

½" frost-proof water tap, especially designed for private gardens. Made from glass peened stainless steel. The beautiful and classic water taps from FROSTLINE® are a stylish addition to any garden, patio, courtyard and anywhere else with a need for fresh outdoor water. The water tap is supplied complete with well.

The water tap is provided with a self-emptying 3-way sliding valve ensuring that the tap remains frost-proof, even at hard freezing temperatures. The seals can be replaced without digging up the well. Pull the water tap up of the well, dismantle the valve and change the seals (o-rings).

Is the product to be placed in an area with a high environmental impact, including sea fog, it is recommended to choose a special design i.e. an electro polished surface.

### PRODUCT

Designation: ½" frost-proof water tap for outdoor installation  
Tapping: ¼" nipple pipe thread  
Connection: ½" nipple pipe thread

### INSTALLATION DIMENSIONS

Tapping height: 430 mm  
Tapping depth: 225 mm  
Pipe stand height: 795 mm  
Height of handle: 715 mm  
Height of spout: 630 mm

### PRODUCT DIMENSIONS


Overall height: 1,695 mm  
Overall width: 200 mm  
Well: D200 x 900 mm

### SHIPPING

Dimensions, H-W-D: 1,740 x 200 x 380 mm  
Weight: 10.5 kg complete with well

### VALVE

FROSTLINE® self-emptying sliding valve  
Capacity: 18-23 l/min. at 2-4 bar  
O-rings: 1 x D14 x 1,5 70sh, 2 x D10x2,5 70sh

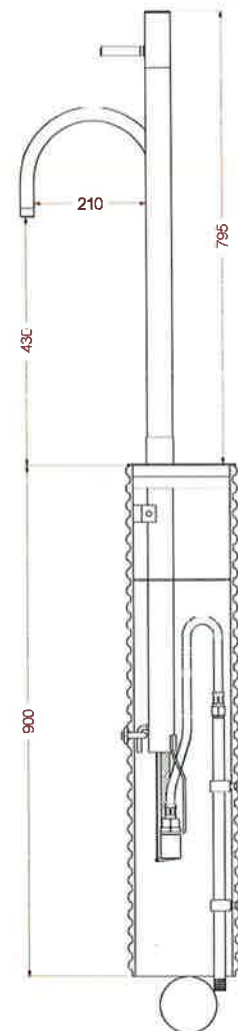

GDV-approval no.: 04/00177

### OPERATION OF THE VALVE

The water tap is provided with a 3-way self-emptying sliding valve. When the water tap is not in use, the valve and riser pipe are emptied of water that might otherwise freeze. The water tap and thus the valve and riser pipe are frost-proof as long as the water supply line for the tap does not freeze.



09.2008

<b>MODELS</b>		
F004	74.34.80.004	Classic Water Tap
<b>OPTIONAL</b>		
F512	74.34.80.916	Classic Well Ring D60
F530	74.34.89.916	Quick coupling - stainless steel
F921	74.34.89.004	Extension hose 300mm w/fittings